

GET SERIES

HIGH EFFICIENCY ECM CASED CEILING MOUNT ELECTRIC HEAT DX COOL AIR HANDLER

Product Dimensions & Specifications



WARRANTY

One year limited parts warranty

OPTIONS

See options menu

MANUFACTURED IN THE USA

STANDARD FEATURES

APPLICATION VERSATILITY

Built in mounting tabs for ceiling or furrdown mounting. Louvered ceiling access panel has separate frame that attaches to ceiling joists. Solid access panel available for use with end return installations. Compatible with most brands of air conditioners or heat pumps.

MOTOR

Constant torque ECM allows motor speed control with embedded software. Motors are pre-programmed at the factory.

LOW LEAKAGE CABINET

Less than 2% air leakage from cabinet when tested in accordance with ASHRAE standard 193. Unit must be installed according to AirMark installation instructions. Sturdy, fully insulated galvanized steel cabinet with knockout for duct return.

ELECTRONIC CIRCUIT BOARD

Electronic circuit board provides 30 secs ON/OFF blower time delay extracting more heat/cool from the coil.

ELECTRIC HEAT KITS

Heat kits available in 3, 5, 6, 8, & 10 KW. Models with electric heat include sequencers and temperature limit switches for safe, efficient operation. Easily accessible controls for quick service.

DX COIL

High efficiency rifled copper tube/enhanced aluminum fins provide maximum heat transfer. All coils immersion tested at 500 psi then nitrogen pressurized and factory sealed for maximum reliability. Liquid-line Schrader allows pre-installation pressure testing. Available with either orifice or TXV metering device factory installed. Field-installable bolt-on TXVs is also available. Primary & secondary condensate drain. All drain connections are 3/4" NPT. Powder-painted metal drain pan. Access door allows for coil cleaning. Certified for use with either R22 or R410A.

Representative image only.
Some models may vary in appearance.
Due to continuous product improvement,
specifications are subject to change
without notice.



Rev. Date: 06/11/19

© 2019 AirMark



HEATING AND COOLING PERFORMANCE AND ELECTRICAL DATA

MODEL	HEAT KIT	PERFORMANCE DATA				ELECTRICAL DATA				
		NOMINAL COOLING (BTUS)	HEATING KW		HEATING KBTUH		MINIMUM CIRCUIT AMPACITY (MCA)		MAX BREAKER OR FUSE SIZE	
			208V	240V	208V	240V	208V	240V	208V	240V
GET 18/19/20	HTS00	18,000	0.0	0.0	0.0	0.0	5.0	5.0	15.0	15.0
	HTS03		2.3	3.0	7.8	10.2	18.5	20.6	20.0	25.0
	HTS05		3.7	4.8	12.6	16.4	26.6	30.0	30.0	30.0
	HTS06		4.6	6.0	15.7	20.5	32.0	36.3	35.0	40.0
	HTS08		6.1	8.0	20.8	27.3	41.1	46.7	45.0	50.0
	HTS10		7.4	9.6	25.3	32.8	48.3	55.0	50.0	60.0
GET 24/25/26/28	HTS00	24,000	0.0	0.0	0.0	0.0	5.0	5.0	15.0	15.0
	HTS03		2.3	3.0	7.8	10.2	18.5	20.6	20.0	25.0
	HTS05		3.7	4.8	12.6	16.4	26.6	30.0	30.0	30.0
	HTS06		4.6	6.0	15.7	20.5	32.0	36.3	35.0	40.0
	HTS08		6.1	8.0	20.8	27.3	41.1	46.7	45.0	50.0
	HTS10		7.4	9.6	25.3	32.8	48.3	55.0	50.0	60.0
GET 30/31/32	HTS00	30,000	0.0	0.0	0.0	0.0	5.0	5.0	15.0	15.0
	HTS03		2.3	3.0	7.8	10.2	18.5	20.6	20.0	25.0
	HTS05		3.7	4.8	12.6	16.4	26.6	30.0	30.0	30.0
	HTS06		4.6	6.0	15.7	20.5	32.0	36.3	35.0	40.0
	HTS08		6.1	8.0	20.8	27.3	41.1	46.7	45.0	50.0
	HTS10		7.4	9.6	25.3	32.8	48.3	55.0	50.0	60.0
GET 36/37	HTS00	36,000	0.0	0.0	0.0	0.0	5.0	5.0	15.0	15.0
	HTS03		2.3	3.0	7.8	10.2	18.5	20.6	20.0	25.0
	HTS05		3.7	4.8	12.6	16.4	26.6	30.0	30.0	30.0
	HTS06		4.6	6.0	15.7	20.5	32.0	36.3	35.0	40.0
	HTS08		6.1	8.0	20.8	27.3	41.1	46.7	45.0	50.0
	HTS10		7.4	9.6	25.3	32.8	48.3	55.0	50.0	60.0

AIR HANDLER CHASSIS NOMENCLATURE

G	E	T	18	G	-001
AirMark Air Handler	<u>Voltage & Motor</u> E = 240V Constant Torque ECM	<u>Configuration</u> S = Uncased Ceiling Mount	Nominal Tonnage (KBTUH)	<u>Metering Device</u> 4 = R410A non-bleed A/C or H/P TXV 6 = R410A 20% bleed A/C or H/P TXV B = R22 20% bleed A/C or H/P TXV F = R22 Flo-rater G = R410A Flo-rater X = R22 non-bleed A/C or H/P TXV	Option Code


ELECTRIC HEAT KIT NOMENCLATURE

H	T	S	10
H = Fits GAS, GAT, GES, GET	T = Terminal Block	S = Small Cabinet (18 - 37)	<u>Heat Strip</u> 00 = NO Heat 03 = 3 KW 05 = 5 KW 06 = 6 KW 08 = 8 KW 10 = 10 KW

BLOWER DATA

UNIT MODEL	SPEED TAP	MOTOR AMPS	MOTOR BHP	MOTOR HP	CFM VS. STATIC PRESSURE							
					0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
GET 18/19	HIGH	1.0	0.14	1/2	732	711	690	645	620	600	570	543
	MEDIUM	0.7	0.10		630	610	590	564	531	502	480	460
	LOW	0.7	0.10		590	560	530	500	485	460	440	420
GET 20/24	HIGH	1.0	0.14		732	711	690	645	620	600	570	543
	MEDIUM	0.8	0.11		630	610	590	564	531	502	480	460
	LOW	0.7	0.10		590	560	530	500	485	460	440	420
GET 25	HIGH	2.1	0.29		960	934	920	900	880	865	850	810
	MEDIUM	1.3	0.18		850	835	825	815	810	770	730	710
	LOW	1.1	0.15		785	775	750	732	710	690	670	645
GET 26/30	HIGH	1.7	0.23		950	930	910	900	880	865	850	810
	MEDIUM	1.4	0.19		850	835	825	815	810	770	730	710
	LOW	0.9	0.12		785	775	750	732	710	690	670	645
GET 28	HIGH	1.7	0.23		960	934	920	900	880	865	850	810
	MEDIUM	1.4	0.19		850	835	825	815	810	770	730	710
	LOW	0.9	0.12		785	775	750	732	710	690	670	645
GET 31/36	HIGH	3.4	0.46		1240	1200	1180	1160	1150	1080	1040	1030
	MEDIUM	2.3	0.31		1100	1085	1070	1040	1030	1010	1000	980
	LOW	1.6	0.22		950	940	930	920	900	865	850	845
GET 32	HIGH	2.3	0.31		1100	1085	1070	1040	1030	1010	1000	980
	MEDIUM	2.1	0.29		1070	1042	1030	1010	1000	980	970	920
	LOW	1.5	0.20		950	940	930	920	900	865	850	845
GET 37	T5	3.5	0.48		1335	1305	1285	1255	1225	1210	1195	1170
	T4	3.2	0.31		1260	1230	1195	1165	1140	1115	1090	1070
	T3	2.6	0.29		1160	1130	1110	1085	1065	1040	1020	1000
	T2	2.2	0.27	1075	1045	1010	980	960	935	920	900	
	T1	1.7	0.21	965	935	910	885	850	810	795	775	

Units should not be applied to a system with less than 350 CFM/Ton airflow.
Add 0.05 static when enclosure and/or ceiling panel are used.

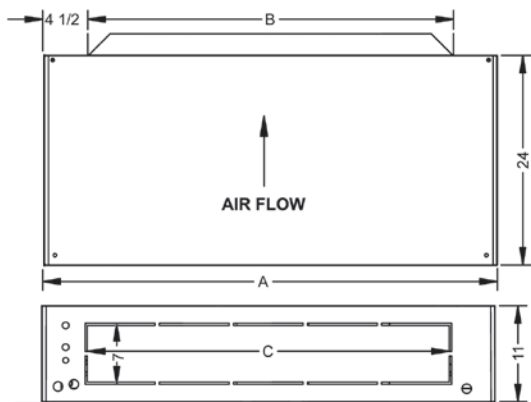

ENCLOSURES DIMENSIONS					
UNIT MODEL	A"	B"	C"	Weight (lbs)	Skid Qty.
GET 18/19/24	40	30	30	135	5
GET 20/25	46	36	36	145	5
GET 26/30/31/36	52	42	42	155	5
GET 28/32/37	60	48	48	175	5

Copper stub out diameter: Suction: 3/4", Liquid: 3/8"

KNOCKOUT FOR DUCTED RETURN
(Ducted return requires remote filter grille (field supplied) and non-louvered panel)

Access Door

VERSATILITY

Equipped with hidden frame feature. Fastens to the outside wall surface and does not have to perfectly match the hole opening. Frame screws are not visible after installation. Available in either solid (S) or louvered (L) style.

MATERIALS

Galvanized steel construction with smooth powder paint finish.


FILTER

20" x 20" x 1" field supplied.

WARRANTY

One-year limited parts warranty.

ACCESS DOOR DIMENSIONS						
FOR USE WITH	PANEL MODEL	GET ACCESS DOOR AND FRAME				FILTERS (QTY)
		A"	B"	C"	D"	
GET 18/19/24	GAD-1(S/L)	43-1/2	27-1/2	41-1/2	26	1
GET 20/25	GAD-5(S/L)	49-1/2	27-1/2	47-1/2	26	2
GET 26/30/31/36	GAD-2(S/L)	55-1/2	27-1/2	53-1/2	26	2
GET 28/32/37	GAD-6(S/L)	63-1/2	27-1/2	61-1/2	26	2

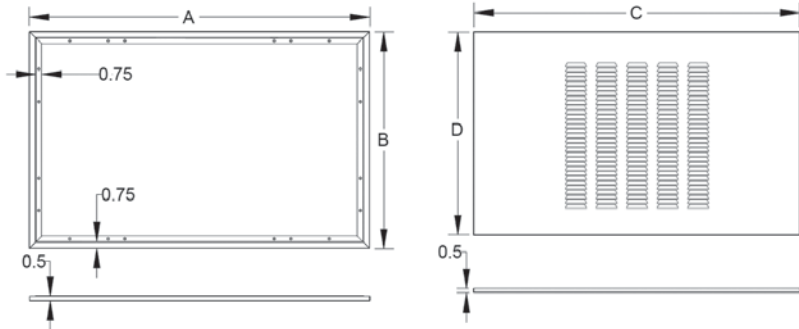

CAP KIT PART NUMBER		
Part Number	Model Number	Enclosure Size
CAP-1	GET18/19/24	40"X24"X11"
CAP-2	GET20/25	46"X24"X11"
CAP-3	GET 26/30/31/36	52"X24"X11"
CAP-4	GET 28/32/37	60"X24"X11"

Note: CAP kit is an insulated panel that covers the entire bottom opening and is utilized for optional ducted return configuration



373 Atascocita Rd
 Humble, TX 77396
 Phone 800.423.9007
 Fax 281.441.6510
www.airmark-ac.com

⚠ WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov