

# Submittal Data: System 12CQ ASU12CQ & AOU12CQ



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction

Submitted By: \_\_\_\_\_

Unit Designation: \_\_\_\_\_ Schedule No. \_\_\_\_\_ Model No.: \_\_\_\_\_

### Capacities:

Cooling	12,300 BTU/h
Outdoor Design Temperature	F° DB/WB 95/ 75
SEER	13.5

### Indoor Unit:

Power Supply	115 V
Noise Level db (A) - H/ M/ L/ Q	45/ 40/ 35/ 28
Weight	21 lbs.


### Outdoor Unit:

Power Supply	115 V
Max Fuse Size	20A
Min. Ampacity	15A
Running Current	9.8A
Weight	77 lbs.

### Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Total or Combined Length	49 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

### OUTLINE AND DIMENSIONS

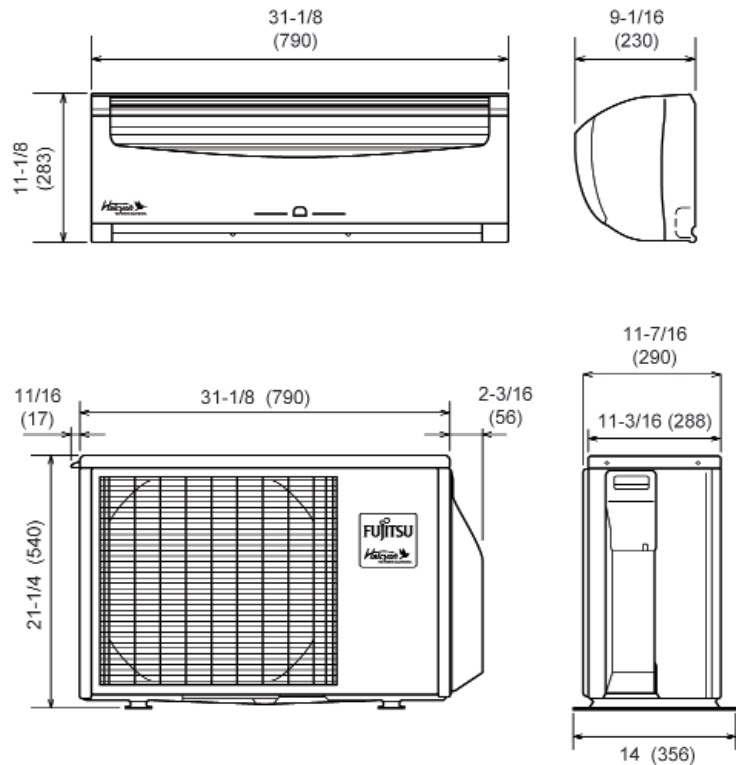

### Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Digital wireless remote control
- ◆ Automatic fan speed control
- ◆ 4 Way Auto Louver function
- ◆ Built in Low Ambient to 32° F
- ◆ Auto Restart/ Reset
- ◆ Programmable Timer
- ◆ Optional wired remote control
- ◆ Plasma Filter
- ◆ Refrigerant R-410A

### Notes:

---



---



---