

# SUBMITTAL DATA SHEET

**DHP09NWB11S/DHP09CSB11S** **9,000 BTU/H (115V) Wall Mounted Heat Pump System**

|                          |             |                      |                  |                      |
|--------------------------|-------------|----------------------|------------------|----------------------|
| <b>Job Name:</b>         |             | <b>Location:</b>     |                  |                      |
| <b>Purchaser:</b>        |             | <b>Order No.:</b>    |                  |                      |
| <b>Engineer:</b>         |             |                      |                  |                      |
| <b>Submitted To:</b>     | <b>For:</b> | <b>Ref:</b>          | <b>Approval:</b> | <b>Construction:</b> |
| <b>Submitted By:</b>     |             | <b>Date:</b>         |                  |                      |
| <b>Unit Designation:</b> |             | <b>Schedule No.:</b> |                  | <b>Model No.:</b>    |

## FEATURES

- Compact and Quiet Design
- High Efficiency DC Inverter Technology
- Wireless Remote with LCD Display
- Low Ambient Cool to 0 deg F
- Vertical Swing Louver



DRCPX  
(Standard)



CS532AH  
(Optional)



DHP09NWB11S



DHP09CSB11S

## ACCESSORIES

- Wired Controller DWCPX2
- Wired Controller DWUNI
- Wi-Fi Module CS532AH



DWUNI  
(Optional)




DWCPX2  
(Optional)

| System Rating                     |          |                                 |
|-----------------------------------|----------|---------------------------------|
| System Type                       |          | Heat Pump                       |
| Rated Cooling Capacity            | Btu/h    | 9000                            |
| Cooling Capacity (Min-Max)        | Btu/h    | (2,764-10,918)                  |
| Rated Heating Capacity            | Btu/h    | 9,600                           |
| Heating Capacity (Min-Max)        | Btu/h    | (2,081-12,283)                  |
| EER                               |          | 10                              |
| SEER                              |          | 16                              |
| HSPF                              |          | 9                               |
| Rated Voltage                     | V-PH-Hz  | 115-1-60                        |
| Rated Cooling Current             | Amps     | 10.9                            |
| Rated Heating Current             | Amps     | 10.2                            |
| MCA                               | Amps     | 17                              |
| MOCP                              | Amps     | 25                              |
| Max. Total Piping Length          | ft. (m)  | 50 (15)                         |
| Max. Piping Height                | ft. (m)  | 33 (10)                         |
| Piping Connection - Liquid (O.D.) | in.      | 1/4                             |
| Piping Connection - Gas (O.D.)    | in.      | 3/8                             |
| Indoor Model Number               |          | DHP09NWB11S                     |
| Set Temperature Range             | F (C)    | 61 – 86 (16 – 30)               |
| Airflow High to Low               | CFM      | 318/288/241/171                 |
| Low                               | dB(A)    | 42/38/34/28                     |
| Unit Dimension (WxDxH)            | in. (mm) | 31.10x10.82x7.87 (790x275x200)  |
| Net Weight / GrossWeight          | lbs (kg) | 20.94/25.35 (9.5/11.5)          |
| Outdoor Model Number              |          | DHP09CSB11S                     |
| Operation Range - Cooling         | F (C)    | 0~115 (-18~46)                  |
| Operation Range - Heating         | F (C)    | -4~75 (-20~24)                  |
| Refrigerant                       |          | R410A                           |
| Refrigerant Charge                | oz (kg)  | 24.69 (0.70)                    |
| Unit Dimension (WxDxH)            | in. (mm) | 33.38x21.25x12.59 (848x540x320) |
| Net Weight / GrossWeight          | lbs (kg) | 62.83/68.34 (28.5/31)           |
| Sound Pressure Level dB(A)        | dB(A)    | 53                              |


**DHP09NWB11S/DHP09CSB11S**

Unit: inch

Indoor Unit Dimensions

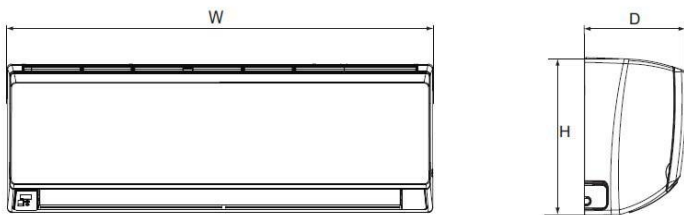


| Dimensions |        |
|------------|--------|
| W          | 31 1/8 |
| H          | 10 7/8 |
| D          | 7 7/8  |

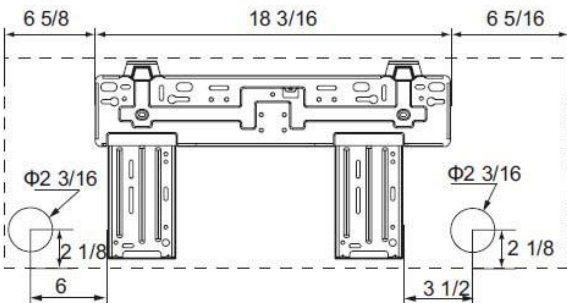

|                 |           |
|-----------------|-----------|
| Drain Connector | 5/8-in OD |
|-----------------|-----------|

Outdoor Unit Dimensions

Unit: inch

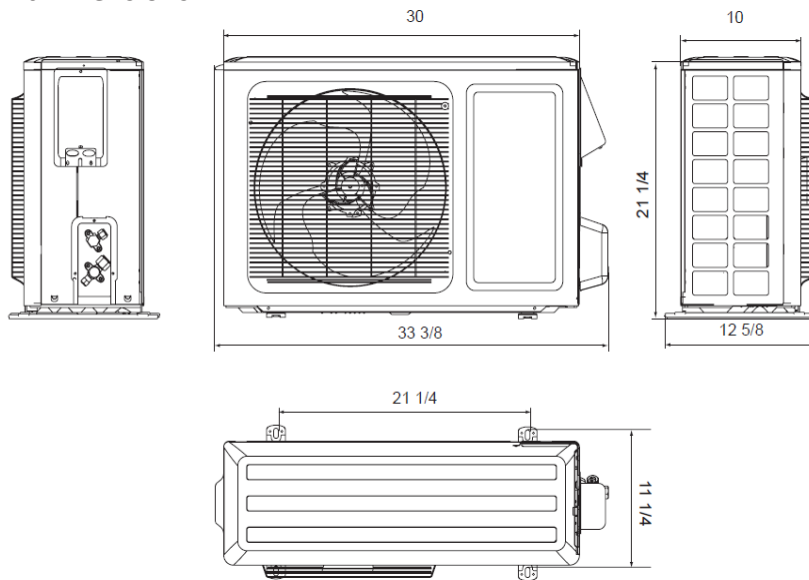

Notes:

1. Recommended cable type between Outdoor and Indoor Unit, 14-4 AWG Stranded Copper THHN 600V Wire
2. Power wiring cable size must comply with applicable national and local codes
3. Test conditions are based on AHRI 210/240

