

LV Model Series Commercial Water Source Heat Pumps

Engineering
Submittal
Sheet



BOSCH

Overview and Certifications



- ▶ ½ to 6 ton capacities
- ▶ Single Stage Ultra Compact Cabinet
- ▶ New and improved Scroll and Rotary Compressors
- ▶ Option rich features and components

Commercial WSHP Product Portfolio

Product	Water-to-Air						Water-to-Water				
	LM	LM Splits	ES	EP	QV	LV	CA	EC	MC	WT	WW
Price	\$\$\$	\$\$\$	\$\$\$-	\$\$	\$+	\$	\$	\$\$	\$\$	\$\$	\$\$
Model Sizes <6 Ton	007			X		X					
	009			X		X	X				
	012			X		X	X				
	015			X		X	X				
	018			X		X	X				
	024	X	X		X	X	X				
	025			X							X
	030	X			X	X	X				
	035			X							X
	036	X	X		X	X	X				
	041						X				
	042				X	X	X				
	048	X	X		X	X	X				
	049			X							X
060	X	X		X	X	X				X	
061			X							X	
070	X			X		X					
071			X							X	
Model Sizes >6 Ton	072							X			
	096							X			
	120							X			X
	122										X
	150							X			
	151							X			
	180							X			X
	181							X			
	210							X			X
	240							X			X
	300							X			
	360							X	X		X
	420										X
	480									X	
600									X		
720									X		

Featured model

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Model Nomenclature

LV 48 - 1 VTC - F L T A T C - X H G X X X X D 7 H X X 4 X X X S B A
 1-2 3-5 6 7 8-9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40

MODEL:

LV

NOMINAL CAPACITY:

007, 009, 012, 015, 018
 024, 030, 036, 041, 042
 048, 060, 070

ELECTRICAL CONFIGURATION:

0 - 115/60/1
 1 - 208-230/60/1
 2 - 277/60/1
 3 - 208-230/60/3
 4 - 460/60/3
 5 - 575/60/3
 8 - 220-240/50/1
 A - 380-420/50/1

CABINET CONFIGURATION:

HZ - Horizontal
 VT - Vertical

COAX OPTIONS:

C - Copper
 N - Cupro-nickel

WATER CONNECTIONS:

F - Front
 B - Bottom
 M - Marine

RETURN AIR CONFIGURATION:

L - Left
 R - Right

DISCHARGE AIR LOCATION:

T - Top
 S - Straight
 E - End
 B - Bottom

FAN/MOTOR OPTION:

P - Standard PSC
 A - Constant Airflow ECM
 T - Constant Torque ECM

AIR COIL:

U - Uncoated
 D - DuoGuard

REVISION LEVEL:

D - Current
 E - Current (012 VT Only)

ELECTRIC HEAT:

X - None
 A - 5 kW
 B - 7.5 kW
 C - 10 kW

CABINET CONSTRUCTION:

A - G90 Steel / 1/2" Standard 1.5LB Dual Density Fiberglass
 C - G90 Steel / 1/2" Closed Cell Foam
 D - G90 Steel / 1/2" Standard 1.5LB Dual Density Fiberglass, Extra Quiet
 F - G90 Steel / 1/2" Closed Cell Foam, Extra Quiet

APPLICATION:

G - Extended Range (Geothermal)
 T - Standard Range (TXV)

CODE STRING LEVEL:

A - Revision

CHANNEL:

B - Bosch

STANDARD/SPECIAL:

S - Standard

AGENCY OPTIONS:

X - ETL (UL 1995)
 C - CE (50 Hz Only)
 E - ETL w/ E-Heat and Single Point Power

NOT USED:

X - None

DRIVE SPEED (MC ONLY):

X - N/A

MOTOR HP/QTY (BELT DRIVE ONLY)

X - N/A

AIR FILTRATION:

1 - 1" Standard Throwaway Filter w/ 2-sided Filter Rack
 4 - 2" MERV 8 w/ 4-sided Filter Rack
 5 - 2" MERV 13 w/ 4-sided Filter Rack

NOT USED:

X - None

ECONOMIZER:

X - None
 E - Waterside Economizer w/ 3 Way Valve and Controls

WATER FLOW CONTROL OPTIONS:

X - None
 2 - 2 Way Solenoid Valve
 3 - MeasureFlow (3 GPM/Ton)
 4 - 2 Way Solenoid + MeasureFlow
 6 - Water Regulating Valve Connection

CONTROLS:

X - Standard (UPM)
 M - DDC - Multi-Protocol (BacNET, Modbus, N2) (Control Air 5600)
 L - DDC - LonWorks (Control Air 5600 + LonWorks Card)

TRANSFORMER:

4 - 40 VA
 5 - 50 VA
 7 - 75 VA
 1 - 100 VA

REFRIGERATION:

X - None
 H - Hot Gas Reheat - On/Off
 B - Hot Gas Bypass
 C - Hot Gas Bypass with Hot Gas Reheat
 S - Straight Cool

ELECTRICAL OPTIONS:

A - EMS relay
 C - Compressor Monitor Relay
 E - Pump/valve relay
 G - Boilerless control
 J - Disconnect Switch
 M - Wire transformer to 208 volts
 X - As default for non used electrical codes

B - Blower Monitor Relay
 D - Phase Monitor
 H - Flow proving switch
 K - Fire Alarm Relay/Dual Power
 Z - EMS Relay + Pump/Valve Relay

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

AHRI Ratings (13256-1) - LV Series PSC Motor

Model Number	Water Loop Heat Pump				Ground Loop Heat Pump				CFM	GPM
	Cooling 86 deg.F		Heating 68 deg.F		Cooling 77 deg.F		Heating 32 deg.F			
	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP		
007	6,100	13.20	7,800	5.10	6,800	15.10	4,900	3.40	300	2.0
009 HZ	8,150	12.40	10,700	4.70	8,700	14.40	6,900	3.20	300	2.5
009 VT	8,150	12.40	10,700	4.70	8,700	14.40	6,900	3.20	330	2.5
012 HZ	10,900	12.20	13,000	4.30	11,800	14.10	8,700	3.20	375	3
012 VT	10,900	12.20	13,800	4.30	11,500	14.10	8,800	3.20	375	3
015	14,200	12.80	16,100	4.40	14,200	14.60	11,300	3.30	500	4
018	18,200	14.10	20,200	4.60	19,200	16.15	14,300	3.50	600	5
024	24,300	14.20	27,400	5.00	25,400	16.90	18,100	3.55	800	6
030	28,200	13.40	32,600	4.70	29,500	15.60	21,500	3.40	950	7
036	36,250	14.30	38,800	4.65	38,000	16.65	27,100	3.55	1200	9
041	35,600	14.15	39,100	4.45	37,300	16.20	27,400	3.30	1240	9
042	39,500	13.65	42,800	4.45	41,200	15.90	30,000	3.25	1380	10
048	46,200	13.95	58,600	4.65	48,400	16.35	39,300	3.40	1640	12
060 HZ	59,200	13.60	74,200	4.80	61,900	15.50	49,200	3.80	1700	15
060 VT	59,100	13.60	77,800	4.80	61,600	15.80	53,400	3.75	1900	15.0
070	64,000	13.30	72,800	4.40	66,400	15.00	50,800	3.40	2000	16


AHRI Ratings (13256-1) - LV Series ECM Motor

Model Number	Water Loop Heat Pump				Ground Loop Heat Pump				CFM	GPM
	Cooling 86 deg.F		Heating 68 deg.F		Cooling 77 deg.F		Heating 32 deg.F			
	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP		
015	13,700	13.90	15,500	4.40	14,400	16.20	10,700	3.30	500	4
018	18,500	14.50	19,900	4.70	19,500	16.95	14,000	3.55	650	5
024	24,700	14.90	27,000	5.10	25,800	17.65	17,700	3.60	850	6
030	28,800	13.50	32,000	4.90	30,100	15.65	20,900	3.55	950	7
036	36,550	14.70	38,400	4.75	38,300	17.10	26,700	3.60	1200	9
041	36,600	14.35	38,200	4.70	38,300	16.45	26,500	3.45	1240	9
042	40,400	14.20	41,800	4.60	42,100	16.60	29,000	3.40	1380	10
048	47,100	14.30	57,800	4.70	49,300	16.70	38,500	3.45	1640	12
060 HZ	59,000	14.30	66,400	4.30	61,100	16.40	46,200	3.30	2000	15
060 VT	59,600	14.40	77,000	4.95	62,200	16.55	52,400	3.90	2000	15
070	65,200	14.60	71,800	4.60	67,600	16.60	50,000	3.50	2100	16


Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL



Vertical Unit Configurations


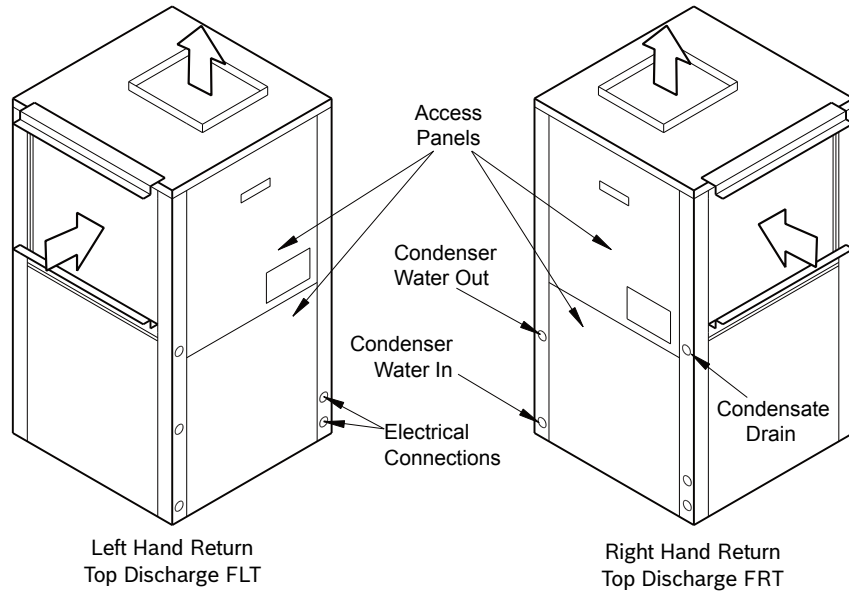


Horizontal Unit Configurations

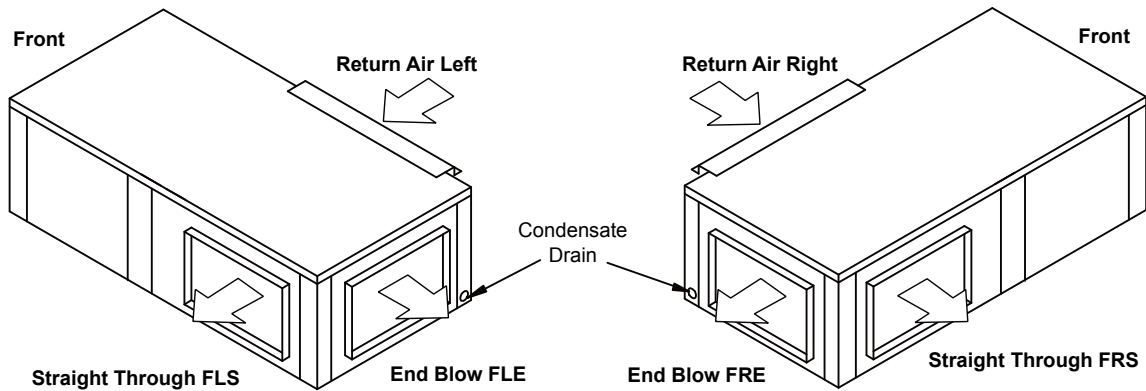



LV Vertical Unit Dimensions and Connections

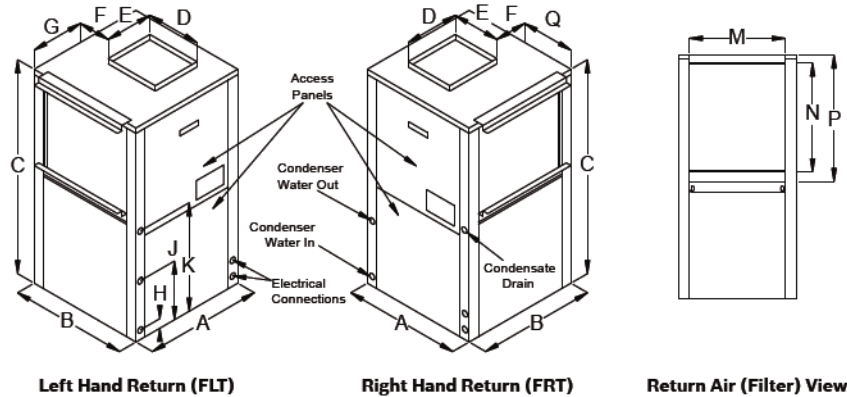

NOTE: The local electric codes may require 36" or more clearance at the electrical control box.

LV Vertical Unit Dimensions

Model	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	Condenser Water Connections	Recommended Replacement Nominal Filter Size
	Width	Depth	Height	Discharge Depth	Discharge Width	Cabinet Edge to Discharge	Left Side to Discharge	Water Inlet	Water Outlet	Condensate Drain	R/A Duct Width	R/A Duct Flange Height	Filter Rack Height	Cabinet Edge to Discharge		
LV007	19.0	19.0	24.25	10.0	8.0	4.5	9.3	2.44	9.68	13.87	16.0	8.0	10.0	5.4	3/4" FPT	10 × 16 × 1
LV009	19.0	19.0	24.25	10.0	8.0	4.5	9.3	2.44	9.68	13.87	16.0	8.0	10.0	5.4	3/4" FPT	10 × 16 × 1
LV012	19.0	19.0	24.25	10.0	8.0	4.5	9.3	2.44	9.68	13.87	16.0	8.0	10.0	5.4	3/4" FPT	10 × 16 × 1
LV015	21.5	21.5	32.25	14.0	14.0	3.1	5.2	2.85	8.45	15.87	20.0	14.0	16.0	5.2	3/4" FPT	16 × 20 × 1
LV018	21.5	21.5	32.25	14.0	14.0	3.1	5.2	2.85	8.45	15.87	20.0	14.0	16.0	5.2	3/4" FPT	16 × 20 × 1
LV024	21.5	21.5	39.25	14.0	14.0	3.1	5.2	2.80	8.45	18.87	20.0	18.0	20.0	5.2	3/4" FPT	20 × 20 × 1
LV030	21.5	21.5	39.25	14.0	14.0	3.1	5.2	2.80	8.45	18.87	20.0	18.0	20.0	5.2	3/4" FPT	20 × 20 × 1
LV036	21.5	26.0	43.25	16.0	14.0	4.0	5.0	2.75	10.77	18.87	24.0	22.0	24.0	5.0	3/4" FPT	24 × 24 × 1
LV041	21.5	21.5	39.25	16.0	14.0	1.7	4.7	2.80	8.45	18.87	20.0	18.0	20.0	4.7	3/4" FPT	20 × 20 × 1
LV042	21.5	26.0	44.25	16.0	14.0	4.0	5.0	2.75	10.77	18.87	24.0	22.0	24.0	5.0	3/4" FPT	24 × 24 × 1
LV048	24.0	32.5	45.25	18.0	14.0	7.0	6.2	3.26	13.20	20.87	30.0	22.0	24.0	6.2	1" FPT	24 × 30 × 1
LV060	24.0	32.5	45.25	18.0	14.0	7.0	6.2	3.26	13.20	20.87	30.0	22.0	24.0	6.2	1" FPT	24 × 30 × 1
LV070	26.0	33.25	58.25	18.0	16.0	7.8	7.2	2.92	13.36	25.87	30.0	30.0	32.0	7.2	1" FPT	16 × 30 × 1 (2)

All dimensions within $\pm 0.125"$. All condensate drain connections are 3/4" FPT. LV015-070 can be field converted between end blow and straight through supply air configurations.


Specifications subject to change without notice.

1" filter rack extends 1.23" beyond the side of the unit. 2" filter rack extends 2.89" beyond the side of the unit.

The 2" filter rack is 4 sided with a filter access door on one end and can accept either a 1" or 2" filter.

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Horizontal Unit Dimensions and Connections

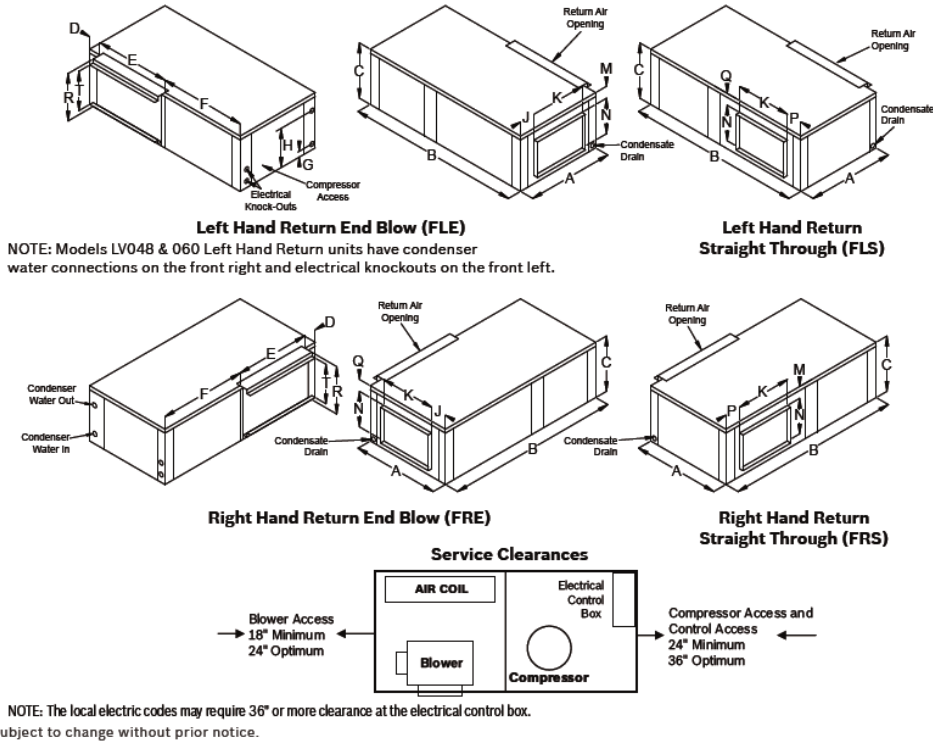

LV Horizontal Unit Dimensions

Model	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	R	T	Condenser Water Connections	Recommended Replacement Nominal Filter Size
	Width	Depth	Height	Cabinet End to Filter Rack	R/A Duct Width	Cab Front to Filter Rack	Water Inlet	Water Outlet	Side to Discharge (End)	Discharge Width	Top to Discharge (FLE & FRS)	Discharge Height	End to Discharge (Straight)	Top to Discharge (FRE & FLS)	Filter Rack Height	R/A Duct Flange Height		
LV007	19.0	33.0	11.5	1.5	16.15	15.35	2.38	9.5	5.375	6.3	5.97	4.1	4.875	1.41	11.3	8.6	3/4" FPT	10 × 16 × 1
LV009	19.0	33.0	11.5	1.5	16.15	15.35	2.38	9.5	5.375	6.3	5.97	4.1	4.875	1.41	11.3	8.6	3/4" FPT	10 × 16 × 1
LV012	19.0	33.0	11.5	1.5	16.15	15.35	2.38	9.5	5.25	6.43	6.31	4.1	4.75	1.14	11.3	8.6	3/4" FPT	10 × 16 × 1
LV015	22.0	43.0	17.0	1.5	20.15	21.35	2.86	15.0	5.42	9.13	6.11	9.65	4.92	1.23	16.8	15.0	3/4" FPT	16 × 20 × 1
LV015*	22.0	43.0	17.0	1.5	20.15	21.35	2.86	14.13*	5.42	9.13	6.11	9.65	4.92	1.23	16.8	15.0	3/4" FPT	16 × 20 × 1
LV018	22.0	43.0	17.0	1.5	20.15	21.35	2.86	14.13	5.42	9.13	6.11	9.65	4.92	1.23	16.8	15.0	3/4" FPT	16 × 20 × 1
LV024	22.0	43.0	18.0	1.5	25.0	16.5	2.86	14.13	5.42	9.13	6.11	9.65	4.92	1.23	16.8	15.0	3/4" FPT	16 × 25 × 1
LV030	22.0	43.0	18.0	1.5	25.0	16.5	2.47	15.0	5.42	9.13	6.11	9.65	4.92	1.23	16.8	15.0	3/4" FPT	16 × 25 × 1
LV036	22.0	54.5	19.0	1.5	30.15	22.85	2.86	16.13	6.47	9.13	7.5	10.28	5.97	1.21	18.8	17.0	3/4" FPT	18 × 30 × 1
LV042	22.0	54.5	19.0	1.5	30.15	22.85	2.86	16.13	5.27	10.45	6.46	11.3	4.77	1.22	18.8	17.0	3/4" FPT	18 × 30 × 1
LV048	25.0	54.5	21.0	1.5	34.6	18.4	2.86	18.52	7.25	10.45	7.46	11.36	6.75	2.16	20.8	19.0	1" FPT	20 × 34.5 × 1
LV060	25.0	54.5	21.0	1.5	34.6	18.4	2.86	18.52	6.32	11.76	6.81	12.5	5.82	1.68	20.8	19.0	1" FPT	20 × 34.5 × 1
LV070	25.0	65.0	21.0	1.5	48.1	15.4	2.86	18.52	6.32	11.76	6.81	12.5	5.82	1.68	20.8	19.0	1" FPT	20 × 24 × 1 (2)

All dimensions within $\pm 0.125"$. All condensate drain connections are 3/4" FPT. LV015-070 can be field converted between end blow and straight through supply air configurations. Specifications subject to change without notice.

1" filter rack extends 1.23" beyond the side of the unit. 2" filter rack extends 2.89" beyond the side of the unit.

The 2" filter rack is 4 sided with a filter access door on one end and can accept either a 1" or 2" filter.

LV015* is with CuNi water coil option.

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Operating Limits – Heating and Cooling	
Heating	Extended Range
Minimum ambient air temperature °F	40
Maximum ambient air temperature °F	85
Minimum evaporator entering air db/wb °F	50
Rated air coil entering air db/wb °F	68
Maximum evaporator entering air db/wb °F	80
Normal water coil entering fluid range °F	25-80
Minimum water coil entering fluid °F	20*
Cooling	Extended Range
Minimum ambient air temperature °F	50
Maximum ambient air temperature °F	100
Minimum evaporator entering air db/wb °F	68/57
Rated air coil entering air db/wb °F	80/67
Maximum evaporator entering air db/wb °F	95/85
Minimum water coil entering fluid temperature °F	50
Water loop typical coil entering fluid range temperature °F	70/90
Maximum water coil entering fluid temperature °F	110

* Antifreeze solution is required at these fluid temperatures.

Antifreeze Correction							
Antifreeze Type	Antifreeze Volume %	Cooling			Heating		WPD Correction Factor EWT 30 °F
		EWT 90 Deg.F			EWT 30 Deg. F		
		Total Cap.	Sens. Cap	Power	Htg. Cap	Power	
Water	0	1.000	1.000	1.000	1.000	1.000	1.000
Propylene Glycol	5	0.997	0.997	1.004	0.989	0.997	1.060
	10	0.994	0.994	1.006	0.986	0.995	1.125
	15	0.990	0.990	1.009	0.978	0.988	1.190
	25	0.983	0.983	1.016	0.960	0.979	1.300
Methanol	5	0.997	0.997	1.003	0.990	0.997	1.060
	10	0.996	0.996	1.005	0.979	0.993	1.100
	15	0.994	0.994	1.008	0.970	0.990	1.140
Ethanol	5	0.998	0.998	1.002	0.981	0.994	1.160
	10	0.996	0.996	1.004	0.960	0.988	1.230
	15	0.992	0.992	1.006	0.944	0.983	1.280
	25	0.986	0.986	1.009	0.917	0.974	1.400
Ethylene Glycol	5	0.997	0.997	1.003	0.993	0.998	1.060
	10	0.995	0.995	1.004	0.986	0.996	1.120
	15	0.992	0.992	1.005	0.980	0.993	1.190
	25	0.988	0.988	1.009	0.970	0.990	1.330
	30	0.985	0.985	1.012	0.965	0.987	1.400

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Waterside Pressure Drop			
Model	Water Flow Rate (GPM)	Water Side Pressure Drop without Internal Valve (PSI)	Water Side Pressure Drop with Internal Valve (PSI)*
LV007	1.0	0.3	0.5
	2.0	1.1	1.8
	3.0	2.3	3.8
LV009	1.0	0.5	0.6
	2.0	1.7	2.3
	3.0	3.5	5.0
LV012	1.5	1.0	1.4
	2.5	2.6	3.6
	3.5	4.8	6.7
LV015	2.0	1.9	2.5
	3.0	3.9	5.3
	4.0	6.5	9.1
LV018	2.5	1.1	2.1
	4.0	2.7	5.2
	5.0	4.0	8.0
LV024	3.0	1.7	2.0
	4.0	2.8	3.4
	6.0	5.8	7.2
LV030	4.0	2.0	2.6
	6.0	4.2	5.6
	8.0	7.0	9.6
LV036	4.5	1.6	2.4
	6.0	2.6	4.0
	9.0	5.4	8.6
LV041	4.5	1.6	2.4
	6.0	2.6	4.0
	9.0	5.4	8.6
LV042	5.0	2.0	3.0
	8.0	4.6	7.2
	11.0	8.2	13.0
LV048	6.0	0.8	1.4
	8.0	1.4	2.5
	12.0	2.8	5.4
LV060	7.5	1.4	2.4
	10.0	2.3	4.1
	15.0	4.8	8.8
LV070	9.0	2.0	3.4
	12.0	3.4	5.9
	18.0	7.0	12.7

* All values based on pure water at 70° F.

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV007 (300 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	1.5	0.7	75/63	7.6	6.6	8.9	0.4	19.2	30	0.8	60	4.5	3.4	0.4	3.1	
			80/67	8.1	6.9	9.4	0.4	20.6			70	4.3	3.2	0.5	2.8	
			85/71	8.6	7.1	9.9	0.4	22.1			80	4.2	2.9	0.5	2.5	
	2.3	1.5	75/63	7.8	6.7	9.1	0.4	21.2		60	4.7	3.6	0.4	3.2		
			80/67	8.3	7.0	9.6	0.4	23.0		70	4.5	3.3	0.5	2.9		
			85/71	8.9	7.3	10.1	0.4	24.8		80	4.4	3.1	0.5	2.6		
	3	2.5	75/63	7.9	6.7	9.2	0.4	22.3		60	4.8	3.7	0.4	3.2		
			80/67	8.5	7.0	9.7	0.3	24.3		70	4.6	3.4	0.5	2.9		
			85/71	9.0	7.3	10.3	0.3	26.5		80	4.4	3.1	0.5	2.6		
60	1.5	0.7	75/63	7.2	6.4	8.6	0.4	16.3	40	0.7	60	5.3	4.1	0.4	3.5	
			80/67	7.6	6.7	9.1	0.4	17.4			70	5.1	3.9	0.5	3.2	
			85/71	8.1	7.0	9.6	0.4	18.6			80	4.9	3.6	0.5	2.9	
	2.3	1.5	75/63	7.4	6.5	8.8	0.4	17.8		60	5.5	4.4	0.4	3.7		
			80/67	7.9	6.8	9.3	0.4	19.2		70	5.3	4.1	0.5	3.3		
			85/71	8.4	7.1	9.8	0.4	20.6		80	5.1	3.8	0.5	3.0		
	3	2.4	75/63	7.5	6.5	8.8	0.4	18.6		60	5.6	4.5	0.4	3.8		
			80/67	8.0	6.9	9.4	0.4	20.2		70	5.4	4.2	0.5	3.4		
			85/71	8.6	7.1	9.9	0.4	21.9		80	5.2	3.9	0.5	3.0		
70	1.5	0.7	75/63	6.7	6.3	8.3	0.5	13.9	50	0.7	60	6.0	4.9	0.4	4.0	
			80/67	7.2	6.5	8.8	0.5	14.8			70	5.9	4.6	0.5	3.6	
			85/71	7.7	6.8	9.3	0.5	15.8			80	5.7	4.3	0.5	3.2	
	2.3	1.4	75/63	6.9	6.3	8.4	0.5	15.0		60	6.3	5.2	0.4	4.2		
			80/67	7.4	6.6	8.9	0.5	16.2		70	6.1	4.9	0.5	3.7		
			85/71	7.9	6.9	9.4	0.5	17.3		80	5.9	4.5	0.5	3.3		
	3	2.4	75/63	7.0	6.4	8.5	0.4	15.7		60	6.5	5.4	0.4	4.3		
			80/67	7.6	6.6	9.0	0.4	16.9		70	6.3	5.0	0.5	3.8		
			85/71	8.1	7.0	9.5	0.4	18.2		80	6.1	4.6	0.5	3.4		
80	1.5	0.7	75/63	6.3	6.1	8.0	0.5	11.9	60	0.7	60	6.9	5.7	0.4	4.5	
			80/67	6.7	6.4	8.4	0.5	12.6			70	6.6	5.4	0.5	4.0	
			85/71	7.2	6.6	8.9	0.5	13.4			80	6.5	5.0	0.5	3.6	
	2.3	1.4	75/63	6.5	6.1	8.1	0.5	12.8		60	7.2	6.1	0.4	4.7		
			80/67	7.0	6.4	8.6	0.5	13.7		70	7.0	5.7	0.5	4.2		
			85/71	7.4	6.8	9.1	0.5	14.6		80	6.7	5.3	0.5	3.7		
	3	2.3	75/63	6.6	6.2	8.2	0.5	13.3		60	7.4	6.2	0.4	4.9		
			80/67	7.1	6.5	8.7	0.5	14.3		70	7.1	5.9	0.5	4.3		
			85/71	7.6	6.8	9.2	0.5	15.3		80	6.9	5.5	0.5	3.8		
90	1.5	0.6	75/63	5.9	5.7	7.7	0.6	10.2	70	0.7	60	7.7	6.6	0.4	5.0	
			80/67	6.3	6.0	8.1	0.6	10.8			70	7.5	6.2	0.5	4.5	
			85/71	6.7	6.3	8.6	0.6	11.4			80	7.2	5.8	0.5	4.0	
	2.3	1.4	75/63	6.1	5.8	7.8	0.6	10.9		60	8.1	7.0	0.4	5.3		
			80/67	6.5	6.3	8.3	0.6	11.6		70	7.8	6.6	0.5	4.7		
			85/71	6.9	6.6	8.7	0.6	12.4		80	7.6	6.2	0.5	4.1		
	3	2.3	75/63	6.1	6.0	7.9	0.5	11.2		60	8.3	7.2	0.4	5.4		
			80/67	6.6	6.3	8.3	0.5	12.0		70	8.0	6.8	0.5	4.8		
			85/71	7.1	6.6	8.8	0.5	12.9		80	7.8	6.4	0.5	4.3		
100	1.5	0.6	75/63	5.5	5.5	7.4	0.6	8.7	80	0.7	60	8.6	7.4	0.4	5.6	
			80/67	5.8	5.8	7.8	0.6	9.2			70	8.3	7.0	0.5	5.0	
			85/71	6.2	6.1	8.2	0.6	9.8			80	8.1	6.7	0.5	4.4	
	2.3	1.3	75/63	5.6	5.6	7.5	0.6	9.3		60	9.0	7.9	0.4	5.9		
			80/67	6.0	5.9	7.9	0.6	9.9		70	8.7	7.5	0.5	5.2		
			85/71	6.4	6.2	8.4	0.6	10.5		80	8.5	7.1	0.5	4.6		
	3	2.3	75/63	5.7	5.6	7.6	0.6	9.5		60	9.3	8.2	0.4	6.1		
			80/67	6.1	5.9	8.0	0.6	10.2		70	9.0	7.7	0.5	5.3		
			85/71	6.5	6.2	8.5	0.6	10.9		80	8.7	7.3	0.5	4.7		
110	1.5	0.6	75/63	5.1	5.1	7.1	0.7	7.5	Extended Range - Anti-freeze required	0.7	60	8.6	7.4	0.4	5.6	
			80/67	5.4	5.4	7.5	0.7	7.9			70	8.3	7.0	0.5	5.0	
			85/71	5.8	5.8	7.9	0.7	8.4			80	8.1	6.7	0.5	4.4	
	2.3	1.3	75/63	5.2	5.2	7.2	0.7	7.9		60	9.0	7.9	0.4	5.9		
			80/67	5.6	5.6	7.6	0.7	8.4		70	8.7	7.5	0.5	5.2		
			85/71	5.9	5.9	8.0	0.7	8.9		80	8.5	7.1	0.5	4.6		
	3	2.2	75/63	5.3	5.3	7.3	0.6	8.1		60	9.3	8.2	0.4	6.1		
			80/67	5.6	5.6	7.7	0.7	8.7		70	9.0	7.7	0.5	5.3		
			85/71	6.0	6.0	8.1	0.7	9.2		80	8.7	7.3	0.5	4.7		

Extended Range - Anti-freeze required
 AHR/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHR/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV009 HZ (300 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	1	1.0	75/63	8.6	6.9	10.4	0.5	16.0	30	1.1	60	60	6.0	4.5	0.6	3.16
			80/67	9.1	7.1	11.0	0.5	16.9				70	5.9	4.2	0.6	2.91
			85/71	9.7	7.3	11.5	0.5	17.9				80	5.8	4.0	0.6	2.68
	1.5	2.1	75/63	9.0	7.0	10.6	0.5	18.5		2.2	60	6.4	4.8	0.6	3.33	
			80/67	9.6	7.3	11.2	0.5	19.8			70	6.3	4.6	0.6	3.03	
			85/71	10.2	7.5	11.9	0.5	21.1			80	6.2	4.3	0.6	2.79	
	2.5	5.2	75/63	9.3	7.2	10.8	0.4	21.0		5.5	60	6.8	5.2	0.6	3.5	
			80/67	9.9	7.4	11.5	0.4	22.7			70	6.6	4.9	0.6	3.17	
			85/71	10.6	7.7	12.1	0.4	24.6			80	6.5	4.6	0.7	2.9	
60	1	1.0	75/63	7.8	6.9	9.9	0.6	13.3	40	1.1	60	6.9	5.3	0.6	3.56	
			80/67	8.3	7.2	10.4	0.6	13.9			70	6.8	5.1	0.6	3.23	
			85/71	8.7	7.4	10.9	0.6	14.6			80	6.7	4.8	0.7	2.97	
	1.5	2.1	75/63	8.3	7.1	10.2	0.5	15.3		2.2	60	7.4	5.8	0.6	3.75	
			80/67	9.1	7.1	10.9	0.5	16.7			70	7.2	5.5	0.6	3.4	
			85/71	9.7	7.3	11.5	0.5	17.8			80	7.1	5.2	0.7	3.1	
	2.5	5.1	75/63	8.8	7.0	10.5	0.5	17.6		5.4	60	7.9	6.2	0.6	3.94	
			80/67	9.5	7.2	11.2	0.5	19.0			70	7.7	5.9	0.6	3.57	
			85/71	10.1	7.5	11.8	0.5	20.4			80	7.5	5.6	0.7	3.23	
70	1	1.0	75/63	7.4	6.7	9.6	0.6	11.4	50	1.1	60	7.8	6.2	0.6	3.93	
			80/67	7.8	7.0	10.1	0.7	12.0			70	7.7	5.9	0.6	3.58	
			85/71	8.3	7.3	10.6	0.7	12.6			80	7.6	5.6	0.7	3.26	
	1.5	2.0	75/63	7.7	6.9	9.8	0.6	12.9		2.1	60	8.4	6.8	0.6	4.17	
			80/67	8.2	7.1	10.3	0.6	13.6			70	8.3	6.4	0.6	3.78	
			85/71	8.7	7.4	10.9	0.6	14.4			80	8.1	6.1	0.7	3.43	
	2.5	5.0	75/63	8.0	7.0	10.0	0.6	14.3		5.3	60	9.0	7.3	0.6	4.41	
			80/67	8.7	7.3	10.7	0.6	15.6			70	8.8	6.9	0.6	3.96	
			85/71	9.6	7.3	11.5	0.6	17.1			80	8.6	6.5	0.7	3.59	
80	1	1.0	75/63	6.8	6.5	9.2	0.7	9.8	60	1.0	60	8.4	6.8	0.6	4.27	
			80/67	8.1	5.6	10.2	0.7	11.3			70	8.3	6.5	0.6	3.85	
			85/71	7.6	7.0	10.2	0.7	10.7			80	8.2	6.2	0.7	3.5	
	1.5	2.0	75/63	7.9	5.7	9.9	0.7	11.9		2.1	60	9.1	7.4	0.6	4.54	
			80/67	7.7	7.0	10.0	0.7	11.7			70	8.9	7.1	0.6	4.07	
			85/71	8.2	7.2	10.6	0.7	12.3			80	8.7	6.7	0.7	3.68	
	2.5	4.9	75/63	7.6	6.8	9.7	0.6	12.1		5.2	60	9.7	8.0	0.6	4.8	
			80/67	8.1	7.1	10.3	0.6	12.9			70	9.4	7.6	0.6	4.28	
			85/71	8.6	7.4	10.8	0.6	13.7			80	9.2	7.2	0.7	3.85	
90	1	0.9	75/63	6.6	6.1	9.0	0.8	8.7	70	1.0	60	9.4	7.8	0.6	4.68	
			80/67	7.1	6.4	9.5	0.8	9.2			70	9.2	7.4	0.6	4.21	
			85/71	7.2	6.9	9.9	0.8	9.3			80	9.0	7.1	0.7	3.8	
	1.5	1.9	75/63	6.9	6.2	9.2	0.7	9.6		2.1	60	10.1	8.5	0.6	4.99	
			80/67	7.1	6.7	9.5	0.7	9.8			70	9.9	8.1	0.6	4.46	
			85/71	8.3	5.6	10.5	0.7	11.4			80	9.7	7.7	0.7	4.01	
	2.5	4.8	75/63	6.8	6.5	9.2	0.7	10.0		5.1	60	10.8	9.2	0.6	5.3	
			80/67	7.3	6.8	9.7	0.7	10.6			70	10.5	8.7	0.7	4.71	
			85/71	7.7	7.1	10.1	0.7	11.2			80	10.3	8.3	0.7	4.21	
100	1	0.9	75/63	6.2	5.9	8.8	0.8	7.6	80	1.0	60	10.4	8.7	0.6	5.11	
			80/67	6.6	6.2	9.3	0.8	8.0			70	10.2	8.4	0.7	4.57	
			85/71	6.8	6.8	9.6	0.8	8.2			80	10.0	8.0	0.7	4.11	
	1.5	1.9	75/63	6.5	6.1	8.9	0.8	8.3		2.0	60	11.2	9.5	0.6	5.46	
			80/67	6.9	6.3	9.4	0.8	8.8			70	10.9	9.1	0.7	4.86	
			85/71	7.2	6.9	9.9	0.8	9.1			80	10.7	8.7	0.7	4.35	
	2.5	4.7	75/63	6.7	6.1	9.1	0.7	9.0		5.0	60	12.0	10.3	0.6	5.82	
			80/67	7.5	5.7	9.8	0.8	10.0			70	11.7	9.8	0.7	5.14	
			85/71	8.1	5.6	10.4	0.8	10.7			80	11.4	9.3	0.7	4.57	
110	1	0.9	75/63	5.8	5.8	8.6	0.9	6.6	Extended Range - Anti-freeze required	AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.						
			80/67	6.1	6.0	9.0	0.9	6.9								
			85/71	6.6	6.2	9.4	0.9	7.3								
	1.5	1.9	75/63	6.0	5.9	8.7	0.8	7.1			Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.					
			80/67	6.4	6.1	9.1	0.9	7.5								
			85/71	6.9	6.4	9.6	0.9	8.0								
	2.5	4.6	75/63	6.2	6.0	8.8	0.8	7.7				Unit performance may be interpolated. Extrapolation is not allowed.				
			80/67	6.7	6.2	9.3	0.8	8.2								
			85/71	6.9	6.8	9.7	0.8	8.4								

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV009 VT (330 CFM)															
Cooling									Heating						
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop (PSI (FOH))	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop (PSI (FOH))	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP
50	1	1.0	75/63	9.1	6.5	10.8	0.6	16.3	30	1.1	60	6.1	4.5	0.6	3.11
			80/67	8.9	7.8	10.9	0.6	16.0			70	6.0	4.3	0.6	2.87
			85/71	9.4	8.1	11.5	0.6	16.8			80	6.0	4.0	0.7	2.64
	1.5	2.1	75/63	8.8	7.7	10.7	0.5	17.6		60	6.5	4.9	0.6	3.28	
			80/67	9.4	8.0	11.2	0.5	18.7		70	6.4	4.6	0.6	2.99	
			85/71	9.9	8.3	11.8	0.5	19.9		80	6.3	4.3	0.7	2.75	
	2.5	5.2	75/63	9.9	7.0	11.3	0.5	21.6		60	6.9	5.2	0.6	3.44	
			80/67	9.8	8.1	11.5	0.5	21.7		70	6.7	4.9	0.6	3.12	
			85/71	11.3	7.1	12.6	0.4	25.6		80	6.6	4.6	0.7	2.86	
60	1	1.0	75/63	8.1	7.3	10.2	0.6	13.3	40	1.1	60	7.0	5.4	0.6	3.49
			80/67	8.4	7.6	10.6	0.6	13.7			70	6.9	5.1	0.6	3.18
			85/71	8.8	7.9	11.1	0.6	14.3			80	6.8	4.8	0.7	2.93
	1.5	2.1	75/63	8.4	7.5	10.4	0.6	14.9		60	7.5	5.8	0.6	3.69	
			80/67	8.9	7.8	10.9	0.6	15.8		70	7.4	5.5	0.6	3.36	
			85/71	9.4	8.1	11.5	0.6	16.7		80	7.2	5.2	0.7	3.05	
	2.5	5.1	75/63	8.7	7.6	10.6	0.5	16.8		60	8.0	6.3	0.6	3.9	
			80/67	9.3	7.9	11.2	0.5	18.0		70	7.8	5.9	0.7	3.53	
			85/71	9.9	8.2	11.8	0.5	19.3		80	7.7	5.6	0.7	3.2	
70	1	1.0	75/63	7.8	6.9	10.0	0.7	11.6	50	1.1	60	8.0	6.3	0.6	3.88
			80/67	8.3	7.2	10.5	0.7	12.2			70	7.9	6.0	0.7	3.54
			85/71	8.8	7.4	11.1	0.7	12.8			80	7.7	5.7	0.7	3.23
	1.5	2.0	75/63	8.2	7.1	10.2	0.6	13.1		60	8.6	6.8	0.6	4.12	
			80/67	8.4	7.6	10.6	0.6	13.4		70	8.4	6.5	0.7	3.73	
			85/71	8.8	7.9	11.1	0.6	14.1		80	8.2	6.1	0.7	3.39	
	2.5	5.0	75/63	8.9	6.4	10.7	0.6	15.4		60	9.1	7.4	0.6	4.37	
			80/67	8.8	7.7	10.9	0.6	15.1		70	8.9	7.0	0.7	3.92	
			85/71	9.3	8.0	11.4	0.6	16.1		80	8.7	6.6	0.7	3.55	
80	1	1.0	75/63	7.3	6.8	9.7	0.7	10.0	60	1.0	60	8.7	7.0	0.6	4.2
			80/67	7.8	7.0	10.2	0.7	10.5			70	8.6	6.7	0.7	3.79
			85/71	8.3	7.3	10.7	0.7	11.0			80	8.5	6.4	0.7	3.45
	1.5	2.0	75/63	7.7	6.9	9.9	0.7	11.2		60	9.4	7.6	0.6	4.48	
			80/67	8.2	7.2	10.5	0.7	11.9		70	9.2	7.3	0.7	4.01	
			85/71	8.7	7.4	11.0	0.7	12.6		80	9.0	6.9	0.7	3.63	
	2.5	4.9	75/63	8.0	7.0	10.1	0.6	12.4		60	10.0	8.3	0.6	4.75	
			80/67	8.6	7.3	10.7	0.6	13.2		70	9.8	7.8	0.7	4.24	
			85/71	8.7	7.8	11.0	0.6	13.5		80	9.5	7.4	0.7	3.8	
90	1	0.9	75/63	6.7	6.5	9.3	0.8	8.4	70	1.0	60	9.7	8.0	0.6	4.61
			80/67	7.2	6.8	9.8	0.8	8.9			70	9.5	7.6	0.7	4.15
			85/71	7.6	7.0	10.3	0.8	9.3			80	9.4	7.3	0.7	3.74
	1.5	1.9	75/63	7.1	6.7	9.5	0.8	9.3		60	10.4	8.7	0.6	4.93	
			80/67	7.5	6.9	10.0	0.8	9.9		70	10.2	8.3	0.7	4.4	
			85/71	8.0	7.2	10.5	0.8	10.4		80	10.0	7.9	0.7	3.95	
	2.5	4.8	75/63	7.3	6.8	9.7	0.7	10.2		60	11.2	9.4	0.6	5.25	
			80/67	7.8	7.0	10.2	0.7	10.9		70	10.9	9.0	0.7	4.66	
			85/71	8.4	7.3	10.7	0.7	11.6		80	10.7	8.5	0.8	4.16	
100	1	0.9	75/63	6.3	6.3	9.0	0.9	7.3	80	1.0	60	10.7	8.9	0.6	5.04
			80/67	6.7	6.7	9.5	0.9	7.7			70	10.5	8.6	0.7	4.51
			85/71	7.1	6.9	10.0	0.9	8.1			80	10.3	8.2	0.7	4.05
	1.5	1.9	75/63	6.6	6.5	9.2	0.8	8.0		60	11.5	9.8	0.6	5.4	
			80/67	7.0	6.8	9.7	0.8	8.5		70	11.3	9.4	0.7	4.8	
			85/71	7.5	7.0	10.2	0.8	9.0		80	11.1	8.9	0.8	4.29	
	2.5	4.7	75/63	6.8	6.6	9.4	0.8	8.7		60	12.4	10.7	0.6	5.78	
			80/67	7.3	6.8	9.9	0.8	9.3		70	12.1	10.1	0.7	5.1	
			85/71	7.8	7.1	10.4	0.8	9.9		80	11.8	9.6	0.8	4.53	
110	1	0.9	75/63	6.0	6.0	8.9	0.9	6.4	Extended Range - Anti-freeze required	1.0	60	10.7	8.9	0.6	5.04
			80/67	6.3	6.3	9.3	0.9	6.7			70	10.5	8.6	0.7	4.51
			85/71	6.7	6.7	9.7	0.9	7.0			80	10.3	8.2	0.7	4.05
	1.5	1.9	75/63	6.2	6.2	9.0	0.9	7.0		60	11.5	9.8	0.6	5.4	
			80/67	6.5	6.5	9.4	0.9	7.3		70	11.3	9.4	0.7	4.8	
			85/71	7.0	6.7	9.9	0.9	7.7		80	11.1	8.9	0.8	4.29	
	2.5	4.6	75/63	6.4	6.4	9.1	0.9	7.5		60	12.4	10.7	0.6	5.78	
			80/67	6.8	6.7	9.6	0.9	7.9		70	12.1	10.1	0.7	5.1	
			85/71	7.3	6.9	10.1	0.9	8.4		80	11.8	9.6	0.8	4.53	

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV012 (375 CFM)																						
Cooling									Heating													
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP							
50	1.5	1.2	75/63	11.9	9.2	14.4	7.3	16.3	30	1.3	60	7.7	5.6	0.8	2.9							
			80/67	12.7	9.5	15.2	7.4	17.2				70	7.6	5.3	0.8	2.7						
			85/71	13.5	9.9	16.0	7.5	18.1				80	7.5	4.9	0.9	2.5						
	2.3	2.5	75/63	12.4	9.4	14.7	6.7	18.5			60	2.7	70	8.1	6.0	0.8	3.1					
			80/67	13.3	9.7	15.6	6.7	19.8					70	7.9	5.6	0.8	2.8					
			85/71	14.1	10.0	16.4	6.7	21.1					80	7.8	5.2	0.9	2.6					
	3	4.1	75/63	12.7	9.5	14.9	6.4	19.9			60	4.4	60	8.4	6.2	0.8	3.1					
			80/67	13.5	9.8	15.7	6.3	21.4					70	8.2	5.8	0.8	2.9					
			85/71	14.4	10.2	16.6	6.3	22.9					80	8.0	5.4	0.9	2.6					
60	1.5	1.1	75/63	11.3	9.0	14.0	8.1	14.0	40	1.2	60	8.9	6.6	0.8	3.3							
			80/67	12.1	9.3	14.8	8.2	14.8				70	8.7	6.2	0.9	3.0						
			85/71	12.8	9.5	15.6	8.3	15.5				80	8.5	5.9	0.9	2.7						
	2.3	2.5	75/63	11.8	9.1	14.3	7.5	15.8			60	2.6	60	9.4	7.1	0.8	3.4					
			80/67	12.6	9.5	15.1	7.5	16.8					70	9.1	6.7	0.9	3.1					
			85/71	13.4	9.8	16.0	7.6	17.8					80	8.9	6.3	0.9	2.8					
	3	4.0	75/63	12.0	9.2	14.5	7.2	16.8			60	4.3	60	9.6	7.4	0.8	3.5					
			80/67	12.9	9.6	15.3	7.2	17.9					70	9.4	6.9	0.9	3.2					
			85/71	13.7	9.9	16.2	7.2	19.2					80	9.1	6.5	0.9	2.9					
70	1.5	1.1	75/63	10.7	8.7	13.7	8.9	12.1	50	1.2	60	10.0	7.7	0.8	3.6							
			80/67	11.4	9.0	14.4	9.0	12.7				70	9.8	7.3	0.9	3.3						
			85/71	12.2	9.3	15.2	9.1	13.4				80	9.6	6.9	0.9	3.0						
	2.3	2.4	75/63	11.2	8.9	13.9	8.3	13.5			60	2.5	60	10.6	8.3	0.8	3.8					
			80/67	11.9	9.2	14.7	8.4	14.3					70	10.3	7.8	0.9	3.4					
			85/71	12.7	9.6	15.6	8.4	15.1					80	10.1	7.4	1.0	3.1					
	3	3.8	75/63	11.4	9.0	14.1	8.0	14.2			60	4.1	60	11.0	8.6	0.8	3.9					
			80/67	12.2	9.3	14.9	8.0	15.2					70	10.7	8.1	0.9	3.5					
			85/71	13.0	9.7	15.7	8.0	16.2					80	10.4	7.6	1.0	3.2					
80	1.5	1.1	75/63	10.1	8.4	13.3	9.7	10.5	60	1.1	60	11.2	8.9	0.8	4.0							
			80/67	10.8	8.7	14.0	9.8	11.0				70	11.0	8.4	0.9	3.6						
			85/71	11.5	9.1	14.8	9.9	11.5				80	10.8	8.0	1.0	3.3						
	2.3	2.3	75/63	10.5	8.6	13.5	9.1	11.6			60	2.5	60	12.0	9.6	0.8	4.2					
			80/67	11.3	8.9	14.3	9.2	12.3					70	11.7	9.1	0.9	3.8					
			85/71	12.0	9.3	15.1	9.3	12.9					80	11.4	8.5	1.0	3.4					
	3	3.7	75/63	10.7	8.7	13.7	8.8	12.2			60	4.0	60	12.3	10.0	0.8	4.3					
			80/67	11.5	9.0	14.5	8.9	13.0					70	12.1	9.4	0.9	3.9					
			85/71	12.3	9.3	15.3	8.9	13.8					80	11.7	8.9	1.0	3.5					
90	1.5	1.0	75/63	9.5	8.2	12.9	10.5	9.1	70	1.1	60	12.5	10.1	0.8	4.3							
			80/67	10.1	8.5	13.6	10.6	9.5				70	12.2	9.6	0.9	3.9						
			85/71	10.8	8.9	14.4	10.8	10.0				80	12.0	9.1	1.0	3.5						
	2.3	2.2	75/63	9.9	8.3	13.2	9.9	10.0			60	2.4	60	13.3	10.9	0.9	4.5					
			80/67	10.6	8.7	13.9	10.1	10.5					70	13.0	10.4	0.9	4.1					
			85/71	11.3	9.0	14.7	10.2	11.1					80	12.7	9.8	1.0	3.7					
	3	3.6	75/63	10.1	8.4	13.3	9.7	10.4			60	3.8	60	13.8	11.4	0.9	4.7					
			80/67	10.8	8.8	14.0	9.8	11.1					70	13.5	10.8	0.9	4.2					
			85/71	11.5	9.2	14.8	9.9	11.7					80	13.1	10.2	1.0	3.8					
100	1.5	1.0	75/63	8.8	8.0	12.5	11.3	7.8	80	1.1	60	13.8	11.3	0.9	4.7							
			80/67	9.4	8.3	13.2	11.5	8.2				70	13.5	10.8	0.9	4.2						
			85/71	10.1	8.6	13.9	11.7	8.6				80	13.2	10.3	1.0	3.8						
	2.3	2.1	75/63	9.2	8.1	12.8	10.8	8.5			60	2.3	60	14.7	12.3	0.9	4.9					
			80/67	9.9	8.4	13.5	11.0	9.0					70	14.4	11.7	1.0	4.4					
			85/71	10.6	8.8	14.2	11.1	9.5					80	14.1	11.1	1.0	4.0					
	3	3.4	75/63	9.4	8.2	12.9	10.6	8.9			60	3.7	60	15.3	12.8	0.9	5.1					
			80/67	10.1	8.5	13.6	10.7	9.5					70	14.9	12.2	1.0	4.5					
			85/71	10.8	8.8	14.4	10.8	10.0					80	14.5	11.5	1.0	4.1					
110	1.5	1.0	75/63	8.2	7.6	12.2	12.1	6.8	Extended Range - Anti-freeze required	AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.	Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.	Unit performance may be interpolated. Extrapolation is not allowed.	For conditions other than rating conditions provided, consult the BST selection software.	Ratings below 40°F are with a methanol solution.	DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.							
			80/67	8.8	8.0	12.8	12.4	7.1														
			85/71	9.4	8.3	13.5	12.6	7.5														
	2.3	2.1	75/63	8.5	7.8	12.3	11.7	7.3								60	1.1	60	13.8	11.3	0.9	4.7
			80/67	9.2	8.2	13.0	11.9	7.7										70	13.5	10.8	0.9	4.2
			85/71	9.8	8.5	13.8	12.0	8.2										80	13.2	10.3	1.0	3.8
	3	3.3	75/63	8.7	7.9	12.4	11.5	7.6								60	2.3	60	14.7	12.3	0.9	4.9
			80/67	9.3	8.3	13.2	11.6	8.0										70	14.4	11.7	1.0	4.4
			85/71	10.0	8.6	13.9	11.8	8.5										80	14.1	11.1	1.0	4.0

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Capacity Data LV015 (375 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	2	2.0	75/63	14.8	11.4	17.6	0.8	18.0	30	2.1	60	9.6	6.9	0.9	3.0	
			80/67	15.8	11.9	18.6	0.8	19.2				70	9.4	6.5	1.0	2.7
			85/71	16.9	12.3	19.7	0.8	20.7				80	9.2	6.1	1.1	2.5
	3	4.1	75/63	15.3	11.7	17.9	0.8	20.3		4.4	60	10.0	7.3	0.9	3.1	
			80/67	16.4	12.1	18.9	0.7	21.9				70	9.8	6.6	1.0	2.8
			85/71	17.5	12.5	20.1	0.7	23.9				80	9.5	6.4	1.1	2.6
	4	6.9	75/63	15.6	11.8	18.1	0.7	21.6		7.3	60	10.3	7.7	1.0	3.2	
			80/67	16.7	12.2	19.1	0.7	23.5				70	10.0	7.0	1.0	2.9
			85/71	17.9	12.7	20.3	0.7	25.9				80	9.7	6.6	1.1	2.6
60	2	1.9	75/63	14.1	11.2	17.2	0.9	15.3	40	2.1	60	11.0	8.3	1.0	3.3	
			80/67	15.0	11.6	18.1	0.9	16.3				70	10.8	7.7	1.0	3.0
			85/71	16.0	12.0	19.2	0.9	17.4				80	10.5	7.3	1.1	2.8
	3	4.1	75/63	14.6	11.3	17.5	0.9	17.0		4.3	60	11.6	8.7	1.0	3.5	
			80/67	15.6	11.7	18.5	0.9	18.3				70	11.3	8.1	1.1	3.1
			85/71	16.7	12.2	19.5	0.8	19.8				80	11.0	7.6	1.1	2.8
	4	6.8	75/63	14.8	11.4	17.6	0.8	18.1		7.1	60	11.9	9.0	1.0	3.6	
			80/67	15.9	11.9	18.7	0.8	19.5				70	11.6	8.4	1.1	3.2
			85/71	17.0	12.4	19.7	0.8	21.3				80	11.1	7.9	1.1	2.9
70	2	1.9	75/63	13.3	10.8	16.7	1.0	13.1	50	2.1	60	12.5	9.6	1.0	3.7	
			80/67	14.2	11.3	17.7	1.0	13.9				70	12.2	9.1	1.1	3.3
			85/71	15.2	11.7	18.6	1.0	14.8				80	11.9	8.5	1.2	3.0
	3	4.0	75/63	13.8	11.0	17.0	1.0	14.4		4.2	60	13.2	10.2	1.0	3.9	
			80/67	14.8	11.4	18.0	1.0	15.5				70	12.9	9.6	1.1	3.5
			85/71	15.8	11.9	19.0	1.0	16.6				80	12.5	9.0	1.2	3.1
	4	6.6	75/63	14.0	11.1	17.2	0.9	15.2		7.0	60	13.6	10.5	1.0	3.9	
			80/67	15.1	11.5	18.2	0.9	16.4				70	13.2	9.9	1.1	3.5
			85/71	16.1	12.0	19.2	0.9	17.7				80	12.7	9.3	1.2	3.1
80	2	1.9	75/63	12.6	10.5	16.3	1.1	11.2	60	2.0	60	14.0	11.1	1.0	4.0	
			80/67	13.4	11.0	17.2	1.1	11.9				70	13.7	10.5	1.1	3.6
			85/71	14.3	11.4	18.1	1.1	12.6				80	13.3	9.9	1.2	3.3
	3	3.9	75/63	13.0	10.7	16.6	1.1	12.3		4.2	60	14.8	11.8	1.0	4.2	
			80/67	14.0	11.1	17.5	1.1	13.1				70	14.4	11.2	1.1	3.7
			85/71	14.9	11.6	18.5	1.1	14.0				80	14.0	10.5	1.2	3.4
	4	6.5	75/63	13.3	10.8	16.7	1.0	12.9		6.9	60	15.2	12.3	1.0	4.3	
			80/67	14.2	11.2	17.7	1.0	13.8				70	14.8	11.4	1.1	3.8
			85/71	15.2	11.7	18.7	1.0	14.9				80	14.3	10.8	1.2	3.4
90	2	1.9	75/63	11.8	10.1	15.9	1.2	9.7	70	2.0	60	15.6	12.6	1.0	4.4	
			80/67	12.6	10.6	16.7	1.2	10.2				70	15.2	11.9	1.1	3.9
			85/71	13.5	11.1	17.6	1.2	10.8				80	14.9	11.3	1.2	3.5
	3	3.8	75/63	12.3	10.3	16.1	1.2	10.5		4.1	60	16.5	13.5	1.1	4.6	
			80/67	13.1	10.8	17.0	1.2	11.2				70	16.0	12.8	1.1	4.1
			85/71	14.0	11.2	18.0	1.2	11.9				80	15.6	12.1	1.2	3.7
	4	6.4	75/63	12.5	10.4	16.2	1.1	11.0		6.8	60	17.0	14.0	1.1	4.7	
			80/67	13.4	10.9	17.2	1.1	11.7				70	16.5	13.3	1.2	4.2
			85/71	14.3	11.3	18.1	1.1	12.6				80	16.0	12.5	1.2	3.8
100	2	1.8	75/63	11.1	9.8	15.4	1.3	8.3	80	1.9	60	17.2	14.2	1.1	4.8	
			80/67	11.8	10.2	16.3	1.3	8.8				70	16.8	13.5	1.2	4.3
			85/71	12.6	10.7	17.1	1.4	9.3				80	16.4	12.8	1.3	3.8
	3	3.7	75/63	11.4	10.0	15.6	1.3	9.0		4.0	60	18.3	15.3	1.1	5.0	
			80/67	12.3	10.4	16.5	1.3	9.6				70	17.7	14.5	1.2	4.5
			85/71	13.1	10.9	17.4	1.3	10.2				80	17.3	13.8	1.3	4.0
	4	6.2	75/63	11.6	10.1	15.8	1.2	9.3		6.6	60	18.9	15.9	1.1	5.2	
			80/67	12.5	10.5	16.7	1.3	10.0				70	18.3	15.0	1.2	4.6
			85/71	13.4	11.0	17.6	1.3	10.6				80	17.8	14.2	1.3	4.1
110	2	1.8	75/63	10.3	9.4	15.0	1.4	7.2	Extended Range - Anti-freeze required	1.9	60	17.2	14.2	1.1	4.8	
			80/67	11.0	9.9	15.8	1.5	7.6				70	16.8	13.5	1.2	4.3
			85/71	11.8	10.4	16.6	1.5	8.0				80	16.4	12.8	1.3	3.8
	3	3.7	75/63	10.6	9.6	15.2	1.4	7.7		4.0	60	18.3	15.3	1.1	5.0	
			80/67	11.4	10.1	16.0	1.4	8.2				70	17.7	14.5	1.2	4.5
			85/71	12.2	10.5	16.9	1.4	8.7				80	17.3	13.8	1.3	4.0
	4	6.1	75/63	10.8	9.7	15.3	1.4	7.9		6.6	60	18.9	15.9	1.1	5.2	
			80/67	11.6	10.1	16.1	1.4	8.5				70	18.3	15.0	1.2	4.6
			85/71	12.5	10.6	17.0	1.4	9.1				80	17.8	14.2	1.3	4.1

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

Bosch Thermotechnology Corp.
 Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV018 (600 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	2.3	1.3	75/63	19.2	14.9	23.1	1.2	16.5	30	1.3	60	12.9	9.6	1.2	3.3	
			80/67	20.4	15.4	24.4	1.2	17.6			70	12.6	9.1	1.2	3.1	
			85/71	21.8	15.8	25.7	1.1	19.0			80	12.3	8.5	1.3	2.8	
	3.4	2.6	75/63	19.9	15.1	23.8	1.1	17.5		60	13.6	10.2	1.2	3.4		
			80/67	21.2	15.8	25.0	1.1	19.0		70	13.3	9.6	1.2	3.1		
			85/71	22.7	16.1	26.4	1.1	20.8		80	12.9	8.9	1.3	2.9		
	4.5	4.2	75/63	20.3	15.3	24.1	1.1	17.9		60	14.0	10.6	1.2	3.4		
			80/67	21.7	15.8	25.4	1.1	19.6		70	13.6	9.8	1.3	3.2		
			85/71	23.1	16.3	26.8	1.1	21.5		80	13.3	9.2	1.3	2.9		
60	2.3	1.2	75/63	18.4	14.5	22.5	1.2	14.9	40	1.3	60	14.7	11.2	1.2	3.5	
			80/67	19.6	15.0	23.7	1.2	15.8			70	14.4	10.6	1.3	3.3	
			85/71	20.8	15.5	25.0	1.2	16.9			80	14.1	10.0	1.4	3.0	
	3.4	2.5	75/63	19.1	14.8	23.0	1.2	16.2		60	15.6	11.9	1.3	3.6		
			80/67	20.3	15.3	24.3	1.2	17.4		70	15.1	11.3	1.3	3.4		
			85/71	21.7	15.8	25.6	1.2	18.8		80	14.8	10.5	1.4	3.1		
	4.5	4.2	75/63	19.4	15.0	23.3	1.2	16.8		60	16.0	12.4	1.3	3.7		
			80/67	20.7	15.4	24.6	1.1	18.2		70	15.6	11.7	1.3	3.4		
			85/71	22.1	16.0	25.9	1.1	19.8		80	15.1	11.0	1.4	3.1		
70	2.3	1.2	75/63	17.5	14.2	21.9	1.3	13.2	50	1.3	60	16.6	12.9	1.3	3.8	
			80/67	18.7	14.7	23.1	1.3	14.0			70	16.2	12.2	1.4	3.5	
			85/71	19.8	15.2	24.3	1.3	14.8			80	15.9	11.6	1.4	3.2	
	3.4	2.5	75/63	18.2	14.5	22.3	1.3	14.5		60	17.6	13.8	1.3	4.0		
			80/67	19.4	14.9	23.6	1.3	15.5		70	17.1	13.1	1.4	3.7		
			85/71	20.6	15.6	24.8	1.2	16.5		80	16.7	12.4	1.5	3.3		
	4.5	4.1	75/63	18.5	14.6	22.6	1.2	15.2		60	18.2	14.2	1.3	4.1		
			80/67	19.8	15.1	23.8	1.2	16.3		70	17.7	13.6	1.4	3.7		
			85/71	21.1	15.7	25.1	1.2	17.6		80	17.2	12.9	1.5	3.4		
80	2.3	1.2	75/63	16.6	13.8	21.4	1.4	11.6	60	1.3	60	18.5	14.7	1.3	4.1	
			80/67	17.7	14.3	22.5	1.5	12.1			70	18.1	14.0	1.4	3.8	
			85/71	18.8	14.9	23.7	1.5	12.7			80	17.8	13.3	1.5	3.5	
	3.4	2.4	75/63	17.2	13.8	21.7	1.4	12.7		60	19.7	15.8	1.3	4.3		
			80/67	18.4	14.6	22.9	1.4	13.5		70	19.2	15.0	1.4	4.0		
			85/71	19.7	15.1	24.2	1.4	14.4		80	18.8	14.3	1.5	3.6		
	4.5	4.0	75/63	17.6	14.2	22.0	1.3	13.4		60	20.3	16.4	1.3	4.5		
			80/67	18.7	14.8	23.1	1.3	14.2		70	19.8	15.7	1.4	4.1		
			85/71	20.1	15.2	24.5	1.3	15.3		80	19.4	14.9	1.5	3.7		
90	2.3	1.1	75/63	15.7	13.1	20.8	1.6	10.1	70	1.2	60	20.5	16.6	1.3	4.5	
			80/67	16.7	14.0	21.9	1.6	10.5			70	20.0	15.9	1.4	4.1	
			85/71	17.8	14.5	23.1	1.6	11.0			80	19.7	15.1	1.5	3.8	
	3.4	2.3	75/63	16.3	13.8	21.2	1.5	11.0		60	21.8	17.9	1.3	4.7		
			80/67	17.4	14.3	22.3	1.5	11.6		70	21.3	17.1	1.4	4.3		
			85/71	18.6	14.8	23.6	1.5	12.3		80	20.9	16.3	1.6	3.9		
	4.5	3.9	75/63	16.7	13.4	21.4	1.4	11.6		60	22.6	18.7	1.4	4.9		
			80/67	17.8	14.4	22.6	1.4	12.3		70	22.1	17.8	1.5	4.5		
			85/71	18.9	15.0	23.8	1.5	13.0		80	21.5	16.9	1.6	4.0		
100	2.3	1.1	75/63	14.8	12.7	20.3	1.7	8.7	80	1.2	60	22.5	18.6	1.4	4.9	
			80/67	15.7	13.3	21.4	1.7	9.1			70	22.1	17.8	1.5	4.5	
			85/71	16.7	13.7	22.5	1.8	9.5			80	21.6	17.0	1.6	4.0	
	3.4	2.3	75/63	15.4	12.9	20.7	1.6	9.5		60	24.1	20.1	1.4	5.2		
			80/67	16.4	13.5	21.8	1.6	10.0		70	23.5	19.2	1.5	4.7		
			85/71	17.4	14.5	22.9	1.7	10.5		80	23.0	18.3	1.6	4.2		
	4.5	3.9	75/63	15.7	13.1	20.8	1.6	10.0		60	25.0	21.0	1.4	5.3		
			80/67	16.7	14.0	22.0	1.6	10.5		70	24.4	20.1	1.5	4.8		
			85/71	17.8	14.6	23.1	1.6	11.1		80	23.8	19.0	1.6	4.3		
110	2.3	1.1	75/63	13.9	12.3	19.8	1.8	7.6	Extended Range - Anti-freeze required	1.2	60	22.5	18.6	1.4	4.9	
			80/67	14.7	12.9	20.9	1.9	7.9			70	22.1	17.8	1.5	4.5	
			85/71	15.6	13.4	21.9	1.9	8.2			80	21.6	17.0	1.6	4.0	
	3.4	2.3	75/63	14.4	12.5	20.1	1.8	8.2		60	24.1	20.1	1.4	5.2		
			80/67	15.3	13.1	21.2	1.8	8.6		70	23.5	19.2	1.5	4.7		
			85/71	16.3	13.7	22.3	1.8	9.0		80	23.0	18.3	1.6	4.2		
	4.5	3.8	75/63	14.7	12.7	20.3	1.7	8.6		60	25.0	21.0	1.4	5.3		
			80/67	15.6	13.2	21.4	1.7	9.0		70	24.4	20.1	1.5	4.8		
			85/71	16.7	13.8	22.5	1.8	9.4		80	23.8	19.0	1.6	4.3		

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV024 (800 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	3	1.2	75/63	25.6	19.1	30.0	1.3	19.2	30	1.3	60	60	16.7	12.2	1.4	3.4
			80/67	27.2	19.8	31.8	1.4	20.1				70	16.6	12.1	1.6	3.1
			85/71	28.9	20.4	33.6	1.4	20.9				80	15.8	10.7	1.7	2.7
	4.5	2.5	75/63	26.5	19.6	30.6	1.2	21.8		2.7	60	60	17.4	12.9	1.5	3.5
			80/67	28.2	20.3	32.4	1.2	23.0				70	17.4	12.9	1.6	3.2
			85/71	30.0	20.9	34.3	1.2	24.2				80	16.7	11.2	1.8	2.8
	6	4.2	75/63	26.9	19.8	30.9	1.2	23.3		4.5	60	60	17.9	13.2	1.5	3.6
			80/67	28.8	20.5	32.8	1.2	24.7				70	17.7	13.4	1.6	3.2
			85/71	30.6	21.2	34.7	1.2	26.1				80	17.6	12.0	1.8	2.9
60	3	1.2	75/63	24.4	18.7	29.3	1.5	16.5	40	1.3	60	60	18.8	14.2	1.5	3.7
			80/67	26.0	19.3	31.0	1.5	17.3				70	18.4	13.5	1.6	3.3
			85/71	27.6	19.9	32.8	1.5	18.0				80	18.0	12.3	1.8	3.0
	4.5	2.5	75/63	25.3	19.0	29.9	1.4	18.5		2.6	60	60	19.9	14.9	1.5	3.9
			80/67	27.0	19.7	31.7	1.4	19.6				70	19.5	15.1	1.7	3.5
			85/71	28.7	20.4	33.5	1.4	20.5				80	19.2	13.6	1.8	3.1
	6	4.1	75/63	25.8	19.2	30.2	1.3	19.7		4.3	60	60	20.4	16.0	1.5	4.0
			80/67	27.5	20.0	32.0	1.3	20.9				70	19.8	14.8	1.7	3.5
			85/71	29.3	20.5	33.9	1.3	22.0				80	19.2	13.6	1.8	3.1
70	3	1.2	75/63	23.2	18.1	28.7	1.6	14.2	50	1.1	60	60	21.1	16.4	1.5	4.1
			80/67	24.7	18.8	30.3	1.7	14.9				70	20.4	15.5	1.7	3.6
			85/71	26.3	19.5	32.0	1.7	15.5				80	20.3	14.7	1.8	3.2
	4.5	2.4	75/63	24.1	18.5	29.2	1.5	15.8		2.2	60	60	22.4	17.3	1.5	4.3
			80/67	25.7	19.1	30.9	1.5	16.7				70	21.8	16.9	1.7	3.8
			85/71	27.4	19.9	32.6	1.6	17.5				80	21.7	16.3	1.9	3.4
	6	4.0	75/63	24.5	18.7	29.4	1.5	16.7		3.7	60	60	23.5	19.0	1.6	4.4
			80/67	26.2	19.4	31.2	1.5	17.7				70	22.7	17.8	1.7	3.9
			85/71	27.9	20.1	33.0	1.5	18.7				80	22.5	16.8	1.9	3.5
80	3	1.2	75/63	22.0	17.6	28.0	1.8	12.2	60	1.0	60	60	23.5	18.7	1.6	4.4
			80/67	23.5	18.3	29.6	1.8	12.7				70	23.1	17.7	1.7	3.9
			85/71	25.0	18.9	31.2	1.9	13.3				80	22.6	16.7	1.9	3.5
	4.5	2.4	75/63	22.9	17.9	28.5	1.7	13.5		2.2	60	60	25.0	20.2	1.6	4.6
			80/67	24.4	18.6	30.1	1.7	14.2				70	24.3	19.8	1.8	4.0
			85/71	26.0	19.4	31.8	1.7	15.0				80	24.0	17.8	1.9	3.6
	6	3.9	75/63	23.3	18.1	28.7	1.6	14.2		3.6	60	60	25.9	21.1	1.6	4.7
			80/67	24.9	18.8	30.4	1.6	15.1				70	25.2	19.6	1.8	4.2
			85/71	26.5	19.6	32.1	1.7	15.9				80	24.9	19.4	2.0	3.7
90	3	1.1	75/63	20.8	17.0	27.4	2.0	10.4	70	1.0	60	60	26.1	21.1	1.6	4.7
			80/67	22.2	17.8	28.9	2.0	10.9				70	25.6	20.2	1.8	4.2
			85/71	23.6	18.4	30.5	2.1	11.3				80	25.2	19.1	2.0	3.7
	4.5	2.2	75/63	21.6	17.4	27.8	1.9	11.5		2.1	60	60	27.9	22.9	1.7	4.9
			80/67	23.0	18.1	29.3	1.9	12.1				70	27.3	21.6	1.8	4.4
			85/71	24.6	18.8	31.0	1.9	12.7				80	26.8	20.5	2.0	3.9
	6	3.7	75/63	22.0	17.6	28.0	1.8	12.1		3.5	60	60	29.0	23.8	1.7	5.1
			80/67	23.5	18.2	29.6	1.8	12.8				70	28.3	22.6	1.8	4.5
			85/71	25.1	18.9	31.3	1.9	13.5				80	27.6	21.5	2.0	4.0
100	3	1.1	75/63	19.6	16.5	26.9	2.2	8.8	80	1.0	60	60	28.7	23.7	1.7	5.1
			80/67	20.9	17.1	28.3	2.3	9.2				70	28.3	22.7	1.8	4.5
			85/71	22.3	17.8	29.9	2.3	9.7				80	27.8	21.5	2.0	4.1
	4.5	2.2	75/63	20.3	16.9	27.2	2.1	9.7		2.1	60	60	30.9	25.8	1.7	5.3
			80/67	21.7	17.6	28.7	2.1	10.2				70	30.3	24.6	1.9	4.7
			85/71	23.2	18.3	30.3	2.1	10.8				80	29.6	23.4	2.0	4.2
	6	3.7	75/63	20.7	16.9	27.3	2.0	10.2		3.5	60	60	32.2	26.8	1.7	5.5
			80/67	22.1	17.7	28.9	2.1	10.8				70	31.4	25.7	1.9	4.9
			85/71	23.6	18.5	30.5	2.1	11.4				80	29.0	24.6	2.0	4.3
110	3	1.1	75/63	18.4	15.9	26.5	2.5	7.4	Extended Range - Anti-freeze required	1.0	60	60	28.7	23.7	1.7	5.1
			80/67	19.7	16.6	27.9	2.5	7.9				70	28.3	22.7	1.8	4.5
			85/71	21.0	17.3	29.3	2.5	8.3				80	27.8	21.5	2.0	4.1
	4.5	2.2	75/63	19.0	16.2	26.7	2.3	8.1		2.1	60	60	30.9	25.8	1.7	5.3
			80/67	20.4	16.9	28.2	2.4	8.6				70	30.3	24.6	1.9	4.7
			85/71	21.8	17.8	29.6	2.4	9.2				80	29.6	23.4	2.0	4.2
	6	3.6	75/63	19.3	16.4	26.8	2.3	8.5		3.5	60	60	32.2	26.8	1.7	5.5
			80/67	20.7	17.2	28.3	2.3	9.0				70	31.4	25.7	1.9	4.9
			85/71	22.2	17.9	29.8	2.3	9.6				80	29.0	24.6	2.0	4.3

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

Bosch Thermotechnology Corp.
 Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Capacity Data LV030 (950 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	3.8	1.8	75/63	30.0	22.5	35.5	1.6	18.5	30	1.6	60	19.9	14.6	1.7	3.4	
			80/67	32.0	23.3	37.5	1.6	19.7			70	19.3	13.6	1.9	3.0	
			85/71	34.0	24.2	39.6	1.6	20.9			80	18.8	12.4	2.1	2.7	
	6.3	4.4	75/63	31.2	23.2	36.2	1.5	21.1		60	21.0	15.7	1.7	3.6		
			80/67	33.3	24.0	38.4	1.5	22.6		70	20.3	14.6	1.9	3.1		
			85/71	35.6	24.8	40.6	1.5	24.1		80	19.5	13.3	2.1	2.7		
	7.5	6.1	75/63	31.5	23.3	36.5	1.4	21.8		60	21.4	16.0	1.7	3.6		
			80/67	33.7	24.1	38.7	1.4	23.4		70	20.7	14.7	1.9	3.2		
			85/71	36.0	24.9	40.9	1.4	25.1		80	20.1	13.7	2.1	2.8		
60	3.8	1.7	75/63	28.6	21.9	34.6	1.8	16.1	40	1.6	60	22.3	16.9	1.8	3.7	
			80/67	30.6	22.7	36.6	1.8	17.1			70	21.8	15.8	1.9	3.3	
			85/71	32.5	23.6	38.6	1.8	18.2			80	21.4	14.8	2.1	2.9	
	6.3	4.3	75/63	29.8	22.5	35.3	1.6	18.2		60	23.8	18.2	1.8	3.9		
			80/67	31.9	23.3	37.5	1.6	19.5		70	23.2	17.1	2.0	3.4		
			85/71	34.0	24.2	39.6	1.6	20.9		80	22.6	15.9	2.2	3.1		
	7.5	6.0	75/63	30.1	22.7	35.5	1.6	18.8		60	24.2	18.6	1.8	3.9		
			80/67	32.3	23.4	37.7	1.6	20.2		70	23.6	17.5	2.0	3.5		
			85/71	34.4	24.4	39.9	1.6	21.7		80	23.0	16.3	2.2	3.1		
70	3.8	1.7	75/63	27.2	21.4	33.8	2.0	13.8	50	1.8	60	25.1	19.4	1.8	4.0	
			80/67	29.1	22.1	35.7	2.0	14.8			70	24.6	18.3	2.0	3.6	
			85/71	31.1	22.9	37.7	2.0	15.7			80	24.1	17.2	2.2	3.2	
	6.3	4.2	75/63	28.4	21.9	34.4	1.8	15.7		60	26.8	21.1	1.9	4.2		
			80/67	30.4	22.7	36.5	1.8	16.9		70	26.2	19.9	2.1	3.7		
			85/71	32.5	23.5	38.6	1.8	18.1		80	25.6	18.6	2.3	3.3		
	7.5	5.9	75/63	28.7	22.0	34.6	1.8	16.2		60	27.3	21.6	1.9	4.3		
			80/67	30.7	22.8	36.7	1.8	17.4		70	26.6	20.3	2.1	3.8		
			85/71	32.9	23.6	38.8	1.8	18.7		80	26.1	19.1	2.3	3.4		
80	3.8	1.7	75/63	25.8	20.8	33.0	2.2	11.9	60	1.7	60	28.0	22.1	1.9	4.3	
			80/67	27.7	21.5	34.9	2.2	12.7			70	27.4	21.0	2.1	3.9	
			85/71	29.5	22.4	36.8	2.2	13.5			80	27.0	19.8	2.3	3.5	
	6.3	4.2	75/63	26.9	21.3	33.6	2.0	13.4		60	30.1	24.1	1.9	4.6		
			80/67	28.9	22.1	35.6	2.0	14.5		70	29.4	22.9	2.1	4.1		
			85/71	30.9	23.0	37.6	2.0	15.5		80	28.9	21.7	2.3	3.7		
	7.5	5.8	75/63	27.2	21.4	33.8	2.0	13.9		60	30.7	24.7	1.9	4.6		
			80/67	29.2	22.3	35.8	2.0	14.9		70	30.0	23.5	2.1	4.2		
			85/71	31.3	23.0	37.9	1.9	16.1		80	29.4	22.2	2.3	3.7		
90	3.8	1.6	75/63	24.4	20.0	32.4	2.4	10.2	70	1.7	60	31.0	25.0	1.9	4.7	
			80/67	26.2	21.0	34.2	2.4	10.9			70	30.4	23.9	2.1	4.2	
			85/71	27.9	21.9	36.0	2.4	11.6			80	29.9	22.7	2.3	3.8	
	6.3	4.1	75/63	25.4	20.5	32.8	2.2	11.4		60	33.5	27.4	2.0	5.0		
			80/67	27.3	21.5	34.7	2.2	12.3		70	32.8	26.2	2.2	4.5		
			85/71	29.3	22.2	36.7	2.2	13.2		80	32.2	24.9	2.4	4.0		
	7.5	5.7	75/63	25.7	20.7	33.0	2.2	11.8		60	34.3	28.2	2.0	5.1		
			80/67	27.6	21.6	34.9	2.2	12.7		70	33.5	26.9	2.2	4.5		
			85/71	29.7	22.3	36.9	2.2	13.7		80	32.8	25.5	2.4	4.1		
100	3.8	1.6	75/63	23.0	19.5	31.8	2.7	8.7	80	1.7	60	34.2	28.1	2.0	5.0	
			80/67	24.7	20.4	33.6	2.7	9.2			70	33.6	26.9	2.2	4.5	
			85/71	26.4	21.1	35.4	2.7	9.8			80	33.0	25.6	2.4	4.1	
	6.3	4.0	75/63	24.0	19.8	32.2	2.5	9.7		60	37.1	31.0	2.0	5.4		
			80/67	25.7	20.9	34.0	2.5	10.4		70	36.3	29.6	2.2	4.8		
			85/71	27.7	21.6	35.9	2.5	11.2		80	35.6	28.1	2.4	4.3		
	7.5	5.5	75/63	24.2	20.0	32.3	2.4	9.9		60	38.0	31.7	2.0	5.5		
			80/67	26.1	20.8	34.2	2.4	10.7		70	37.2	30.3	2.2	4.9		
			85/71	27.9	21.9	36.0	2.4	11.5		80	36.3	28.9	2.4	4.4		
110	3.8	1.6	75/63	21.7	18.9	31.4	2.9	7.4	Extended Range - Anti-freeze required	1.7	60	34.2	28.1	2.0	5.0	
			80/67	23.4	19.7	33.2	3.0	7.9			70	33.6	26.9	2.2	4.5	
			85/71	25.0	20.5	34.9	3.0	8.4			80	33.0	25.6	2.4	4.1	
	6.3	3.9	75/63	22.6	19.3	31.7	2.8	8.2		60	37.1	31.0	2.0	5.4		
			80/67	24.3	20.0	33.4	2.8	8.8		70	36.3	29.6	2.2	4.8		
			85/71	26.0	21.1	35.2	2.8	9.4		80	35.6	28.1	2.4	4.3		
	7.5	5.5	75/63	22.8	19.3	31.7	2.7	8.4		60	38.0	31.7	2.0	5.5		
			80/67	24.5	20.1	33.5	2.7	9.0		70	37.2	30.3	2.2	4.9		
			85/71	26.3	21.2	35.3	2.7	9.7		80	36.3	28.9	2.4	4.4		

Extended Range - Anti-freeze required
 AHR/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHR/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

Bosch Thermotechnology Corp.
 Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV036 (1200 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	4.5	1.5	75/63	38.8	29.9	46.1	0.1	18.4	30	1.7	60	24.7	17.9	2.1	3.4	
			80/67	41.4	30.9	48.9	2.1	19.5			70	23.9	17.0	2.3	3.0	
			85/71	44.0	32.0	51.6	2.1	20.7			80	23.9	16.0	2.6	2.7	
	6	2.6	75/63	39.9	30.3	46.9	2.0	19.6		60	25.2	18.9	2.1	3.5		
			80/67	42.6	31.3	49.7	2.0	20.8		70	24.7	18.1	2.4	3.1		
			85/71	45.3	32.5	52.5	2.0	22.2		80	25.0	16.8	2.6	2.8		
	9	5.2	75/63	41.1	30.9	47.6	1.9	20.3		60	26.7	21.1	2.2	3.6		
			80/67	44.0	31.9	50.5	2.0	21.7		70	26.0	19.2	2.4	3.2		
			85/71	46.9	32.8	53.5	2.0	23.1		80	25.9	16.9	2.6	2.9		
60	4.5	1.5	75/63	37.0	29.1	45.1	2.3	16.1	40	1.6	60	27.7	21.0	2.2	3.7	
			80/67	39.5	30.2	47.7	2.3	17.2			70	27.3	19.5	2.4	3.3	
			85/71	42.0	31.4	50.4	2.3	18.2			80	27.0	18.8	2.7	3.0	
	6	2.5	75/63	38.1	29.5	45.7	2.2	17.1		60	28.7	21.9	2.2	3.8		
			80/67	40.7	30.7	48.4	2.2	18.3		70	28.4	20.4	2.4	3.4		
			85/71	43.4	31.7	51.2	2.2	19.5		80	27.5	19.1	2.7	3.0		
	9	5.1	75/63	39.3	30.0	46.4	2.1	17.8		60	30.0	22.9	2.2	4.0		
			80/67	42.0	31.0	49.3	2.1	19.0		70	29.2	21.9	2.4	3.5		
			85/71	44.9	32.1	52.2	2.1	20.3		80	28.5	20.0	2.7	3.1		
70	4.5	1.5	75/63	35.2	28.3	44.0	2.5	14.1	50	1.5	60	31.1	24.1	2.2	4.1	
			80/67	37.5	29.6	46.5	2.5	15.0			70	30.7	22.7	2.5	3.7	
			85/71	40.0	30.7	49.1	2.5	16.0			80	30.0	21.5	2.7	3.2	
	6	2.4	75/63	36.2	28.8	44.6	2.4	15.0		60	32.4	25.3	2.3	4.2		
			80/67	38.7	30.0	47.2	2.4	16.0		70	31.9	23.9	2.5	3.8		
			85/71	41.4	30.8	50.0	2.4	17.1		80	31.2	22.4	2.7	3.3		
	9	5.0	75/63	37.3	29.3	45.3	2.3	15.5		60	33.9	26.6	2.3	4.3		
			80/67	40.0	30.2	48.0	2.3	16.6		70	33.1	25.3	2.5	3.8		
			85/71	42.8	31.3	50.9	2.3	17.8		80	32.3	24.1	2.8	3.4		
80	4.5	1.5	75/63	33.3	27.6	43.0	2.7	12.3	60	1.5	60	34.8	27.6	2.3	4.4	
			80/67	35.7	28.5	45.5	2.7	13.1			70	34.1	26.2	2.5	3.9	
			85/71	37.9	30.0	48.0	2.7	13.9			80	33.8	24.7	2.8	3.6	
	6	2.4	75/63	34.4	27.9	43.6	2.6	13.0		60	36.3	29.0	2.3	4.6		
			80/67	36.8	29.0	46.2	2.6	13.9		70	35.6	27.6	2.6	4.1		
			85/71	39.2	30.4	48.7	2.6	14.9		80	35.0	25.9	2.8	3.7		
	9	4.9	75/63	35.4	28.3	44.2	2.5	13.5		60	38.1	30.8	2.4	4.7		
			80/67	38.0	29.6	46.8	2.5	14.5		70	37.3	29.1	2.6	4.2		
			85/71	40.7	30.6	49.6	2.5	15.5		80	36.7	27.5	2.8	3.8		
90	4.5	1.4	75/63	31.5	26.7	42.2	3.0	10.5	70	1.5	60	38.6	31.3	2.4	4.8	
			80/67	33.7	28.0	44.6	3.0	11.3			70	38.0	29.9	2.6	4.3	
			85/71	35.9	29.2	47.0	3.0	12.0			80	37.4	28.3	2.9	3.8	
	6	2.3	75/63	32.5	27.1	42.6	2.9	11.2		60	40.5	33.1	2.4	4.9		
			80/67	34.8	28.2	45.1	2.9	12.0		70	39.7	31.5	2.6	4.4		
			85/71	37.1	29.6	47.6	2.9	12.8		80	39.0	29.9	2.9	4.0		
	9	4.7	75/63	33.4	27.7	43.1	2.8	11.6		60	42.7	35.1	2.4	5.1		
			80/67	35.9	28.8	45.6	2.8	12.5		70	41.7	33.5	2.7	4.6		
			85/71	38.4	30.1	48.2	2.8	13.4		80	40.8	31.7	2.9	4.1		
100	4.5	1.4	75/63	29.6	25.9	41.5	3.3	9.0	80	1.5	60	42.7	35.1	2.4	5.1	
			80/67	31.7	27.3	43.7	3.3	9.6			70	42.0	33.6	2.7	4.6	
			85/71	33.8	28.6	46.0	3.3	10.3			80	41.3	32.1	2.9	4.1	
	6	2.2	75/63	30.5	26.3	41.8	3.1	9.6		60	44.9	37.2	2.5	5.3		
			80/67	32.7	27.7	44.1	3.1	10.3		70	44.0	35.6	2.7	4.8		
			85/71	34.9	29.0	46.5	3.1	11.0		80	43.2	33.9	3.0	4.3		
	9	4.6	75/63	31.4	26.9	42.2	3.1	9.9		60	47.4	39.6	2.5	5.5		
			80/67	33.9	27.9	44.7	3.1	10.7		70	46.4	37.8	2.8	4.9		
			85/71	36.2	29.3	47.1	3.1	11.4		80	45.4	36.0	3.0	4.4		
110	4.5	1.3	75/63	27.7	25.4	40.9	3.6	7.6	Extended Range - Anti-freeze required	1.3	60	47.4	39.6	2.5	5.5	
			80/67	29.7	26.6	43.1	3.6	8.2			70	46.4	37.8	2.8	4.9	
			85/71	31.9	27.7	45.3	3.6	8.7			80	45.4	36.0	3.0	4.4	
	6	2.2	75/63	28.6	25.5	41.1	3.5	8.0		AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.	2.2	60	49.4	41.6	2.6	5.8
			80/67	30.7	26.8	43.4	3.5	8.7		70		48.4	39.8	2.9	5.3	
			85/71	32.8	28.3	45.6	3.5	9.3		80		47.4	38.0	3.2	4.8	
	9	4.5	75/63	29.4	26.0	41.4	3.4	8.4		Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.	4.5	60	51.4	43.6	2.7	6.1
			80/67	31.7	27.3	43.7	3.4	9.0		70		50.4	41.8	3.0	5.6	
			85/71	33.9	28.6	46.1	3.4	9.7		80		49.4	40.0	3.3	5.1	

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV041 (1240 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	6	3.0	75/63	38.3	28.8	45.5	2.1	18.4	30	3.3	60	25.8	18.5	2.3	3.3	
			80/67	40.9	29.9	48.2	2.1	19.5				70	25.4	17.4	2.5	2.9
			85/71	43.7	30.8	51.0	2.1	20.7				80	25.0	16.3	2.8	2.7
	8	4.9	75/63	39.1	29.1	46.0	2.0	19.6		5.5	60	26.5	19.1	2.3	3.3	
			80/67	41.8	30.3	48.8	2.0	20.8				70	26.0	18.0	2.5	3.0
			85/71	44.7	31.3	51.7	2.0	22.2				80	25.6	16.7	2.8	2.7
	10	7.2	75/63	39.6	29.3	46.4	1.9	20.3		8.2	60	27.0	19.5	2.3	3.4	
			80/67	42.4	30.5	49.2	2.0	21.7				70	26.5	18.4	2.6	3.0
			85/71	45.3	31.6	52.2	2.0	23.1				80	25.9	17.0	2.8	2.7
60	6	2.8	75/63	36.6	28.1	44.4	2.3	16.1	40	3.1	60	29.3	21.7	2.4	3.6	
			80/67	39.1	29.2	47.0	2.3	17.2				70	28.7	20.5	2.6	3.2
			85/71	41.7	30.2	49.7	2.3	18.2				80	28.3	19.3	2.9	2.9
	8	4.6	75/63	37.3	28.4	44.9	2.2	17.1		5.2	60	30.2	22.5	2.4	3.7	
			80/67	40.0	29.5	47.6	2.2	18.3				70	29.5	21.2	2.6	3.3
			85/71	42.7	30.6	50.4	2.2	19.5				80	29.0	20.0	2.9	3.0
	10	6.9	75/63	37.8	28.6	45.2	2.1	17.8		7.7	60	30.8	23.0	2.4	3.7	
			80/67	40.5	29.7	47.9	2.1	19.0				70	30.0	21.7	2.6	3.3
			85/71	43.4	30.7	50.8	2.1	20.3				80	29.5	20.4	2.9	3.0
70	6	2.7	75/63	34.8	27.4	43.3	2.5	14.1	50	3.0	60	32.9	25.1	2.5	3.9	
			80/67	37.2	28.5	45.8	2.5	15.0				70	32.3	23.8	2.7	3.5
			85/71	39.8	29.5	48.4	2.5	16.0				80	31.6	22.4	2.9	3.2
	8	4.4	75/63	35.5	27.8	43.7	2.4	15.0		4.9	60	34.0	26.1	2.5	4.0	
			80/67	38.1	28.8	46.3	2.4	16.0				70	33.3	24.7	2.7	3.6
			85/71	40.7	29.9	49.0	2.4	17.1				80	32.7	23.3	3.0	3.2
	10	6.6	75/63	36.0	27.9	44.0	2.3	15.5		7.2	60	34.7	26.8	2.5	4.1	
			80/67	38.6	29.1	46.7	2.3	16.6				70	34.0	25.3	2.7	3.7
			85/71	41.3	30.1	49.4	2.3	17.8				80	33.2	23.8	3.0	3.3
80	6	2.6	75/63	33.1	26.5	42.3	2.7	12.3	60	2.8	60	36.8	28.7	2.5	4.2	
			80/67	35.3	27.9	44.6	2.7	13.1				70	36.1	27.3	2.8	3.8
			85/71	37.8	28.7	47.1	2.7	13.9				80	35.4	25.8	3.0	3.4
	8	4.2	75/63	33.8	26.8	42.7	2.6	13.0		4.6	60	38.1	29.9	2.6	4.3	
			80/67	36.1	28.2	45.1	2.6	13.9				70	37.2	28.4	2.8	3.9
			85/71	38.7	29.1	47.7	2.6	14.9				80	36.6	26.9	3.0	3.5
	10	6.3	75/63	34.2	27.0	42.9	2.5	13.5		6.9	60	39.0	30.7	2.6	4.4	
			80/67	36.7	28.1	45.5	2.5	14.5				70	38.1	29.2	2.8	4.0
			85/71	39.3	29.4	48.0	2.5	15.5				80	37.3	27.7	3.0	3.6
90	6	2.5	75/63	31.2	25.9	41.3	3.0	10.5	70	2.7	60	40.9	32.6	2.6	4.6	
			80/67	33.5	26.9	43.6	3.0	11.3				70	40.0	31.1	2.8	4.2
			85/71	35.7	28.1	45.9	3.0	12.0				80	39.3	29.6	3.1	3.7
	8	4.1	75/63	31.9	26.2	41.6	2.9	11.2		4.4	60	42.4	34.1	2.6	4.7	
			80/67	34.3	27.2	44.0	2.9	12.0				70	41.5	32.4	2.9	4.3
			85/71	36.7	28.2	46.5	2.9	12.8				80	40.5	30.8	3.1	3.8
	10	5.9	75/63	32.3	26.4	41.9	2.8	11.6		6.6	60	43.5	35.0	2.6	4.8	
			80/67	34.7	27.6	44.3	2.8	12.5				70	42.4	33.3	2.9	4.3
			85/71	37.2	28.4	46.8	2.8	13.4				80	41.4	31.6	3.1	3.9
100	6	2.4	75/63	29.4	24.9	40.5	3.3	9.0	80	2.6	60	45.2	36.7	2.7	5.0	
			80/67	31.5	26.3	42.6	3.3	9.6				70	44.2	35.1	2.9	4.5
			85/71	33.7	27.2	44.9	3.3	10.3				80	43.3	33.4	3.1	4.0
	8	3.9	75/63	30.1	25.2	40.8	3.1	9.6		4.2	60	47.0	38.4	2.7	5.1	
			80/67	32.3	26.6	43.0	3.1	10.3				70	45.8	36.6	2.9	4.6
			85/71	34.6	27.5	45.3	3.1	11.0				80	44.8	34.9	3.2	4.2
	10	5.8	75/63	30.5	25.4	40.9	3.1	9.9		6.3	60	48.2	39.5	2.7	5.2	
			80/67	32.7	26.7	43.2	3.1	10.7				70	46.9	37.6	2.9	4.7
			85/71	35.1	27.7	45.6	3.1	11.4				80	45.7	35.7	3.2	4.2
110	6	2.3	75/63	27.5	24.3	39.7	3.6	7.6	Extended Range - Anti-freeze required	3.3	60	25.8	18.5	2.3	3.3	
			80/67	29.5	25.5	41.8	3.6	8.2				70	25.4	17.4	2.5	2.9
			85/71	31.6	26.4	43.9	3.6	8.7				80	25.0	16.3	2.8	2.7
	8	3.8	75/63	28.1	24.6	39.9	3.5	8.0		5.5	60	26.5	19.1	2.3	3.3	
			80/67	30.2	25.6	42.1	3.5	8.7				70	26.0	18.0	2.5	3.0
			85/71	32.4	26.7	44.3	3.5	9.3				80	25.6	16.7	2.8	2.7
	10	5.6	75/63	28.5	24.7	40.1	3.4	8.4		8.2	60	27.0	19.5	2.3	3.4	
			80/67	30.7	25.8	42.3	3.4	9.0				70	26.5	18.4	2.6	3.0
			85/71	32.9	27.1	44.5	3.4	9.7				80	25.9	17.0	2.8	2.7

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Capacity Data LV042 (1380 CFM)															
Cooling									Heating						
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP
50	6	3.0	75/63	41.7	32.4	49.7	2.4	17.7	30	3.3	60	28.6	20.7	2.5	3.4
			80/67	44.5	34.4	52.6	2.4	18.8			70	28.2	19.6	2.7	3.0
			85/71	47.3	34.8	55.5	2.4	19.9			80	27.7	18.5	3.0	2.7
	8	4.9	75/63	42.7	32.8	50.3	2.3	18.9		60	29.4	21.7	2.5	3.4	
			80/67	45.6	34.9	53.3	2.3	20.2		70	29.0	20.3	2.8	3.1	
			85/71	48.6	35.9	56.4	2.3	21.5		80	28.6	19.1	3.0	2.8	
	10	7.2	75/63	43.3	33.0	50.7	2.2	19.7		60	30.0	22.1	2.5	3.5	
			80/67	46.3	35.2	53.8	2.2	21.1		70	29.5	20.8	2.8	3.1	
			85/71	49.4	36.2	56.9	2.2	22.5		80	29.1	19.6	3.0	2.8	
60	6	2.8	75/63	39.9	31.6	48.5	2.6	15.5	40	3.1	60	32.3	24.0	2.6	3.6
			80/67	42.5	33.0	51.2	2.6	16.4			70	31.9	22.8	2.8	3.3
			85/71	45.2	34.2	54.0	2.6	17.4			80	31.4	21.5	3.1	3.0
	8	4.6	75/63	40.8	32.0	49.1	2.5	16.6		60	33.3	25.2	2.6	3.7	
			80/67	43.6	33.9	52.0	2.5	17.7		70	32.7	23.7	2.9	3.3	
			85/71	46.4	34.5	54.9	2.5	18.8		80	32.3	22.4	3.1	3.0	
	10	6.9	75/63	41.4	32.2	49.5	2.4	17.3		60	34.1	25.7	2.6	3.8	
			80/67	44.3	34.2	52.4	2.4	18.5		70	33.4	24.4	2.9	3.4	
			85/71	47.3	34.5	55.4	2.4	19.7		80	32.9	23.0	3.1	3.1	
70	6	2.7	75/63	37.9	31.0	47.3	2.8	13.5	50	3.0	60	32.1	24.0	2.6	3.7
			80/67	40.5	33.0	50.0	2.8	14.3			70	31.8	22.8	2.8	3.3
			85/71	43.0	33.4	52.6	2.8	15.2			80	31.3	21.5	3.1	3.0
	8	4.4	75/63	38.8	32.2	47.9	2.7	14.4		60	33.2	25.2	2.6	3.8	
			80/67	41.6	32.3	50.6	2.7	15.4		70	32.6	23.7	2.8	3.4	
			85/71	44.2	33.7	53.4	2.7	16.4		80	32.1	22.4	3.1	3.0	
	10	6.6	75/63	39.4	31.6	48.2	2.6	15.0		60	33.9	25.7	2.6	3.8	
			80/67	42.2	32.5	51.1	2.6	16.1		70	33.3	24.4	2.8	3.4	
			85/71	45.1	33.7	53.9	2.6	17.2		80	32.8	23.0	3.1	3.1	
80	6	2.6	75/63	36.0	30.0	46.3	3.1	11.7	60	2.8	60	36.2	27.6	2.7	4.0
			80/67	38.5	32.0	48.8	3.1	12.5			70	35.5	26.3	2.9	3.6
			85/71	41.0	33.3	51.3	3.1	13.2			80	35.0	25.0	3.2	3.2
	8	4.2	75/63	36.9	30.4	46.8	3.0	12.5		60	37.4	28.8	2.7	4.0	
			80/67	39.4	32.6	49.3	3.0	13.3		70	36.8	27.5	2.9	3.7	
			85/71	42.0	33.9	52.0	3.0	14.2		80	36.1	26.1	3.2	3.3	
	10	6.3	75/63	37.4	30.6	47.1	2.9	13.0		60	38.3	29.7	2.7	4.1	
			80/67	40.0	32.8	49.7	2.9	13.9		70	37.6	28.3	3.0	3.7	
			85/71	42.7	33.1	52.4	2.9	14.8		80	36.9	26.8	3.2	3.4	
90	6	2.5	75/63	34.1	29.0	45.3	3.4	10.1	70	2.7	60	36.0	27.6	2.6	4.0
			80/67	36.3	30.5	47.6	3.4	10.7			70	35.4	26.3	2.9	3.6
			85/71	38.6	31.9	50.0	3.4	11.3			80	34.8	25.0	3.1	3.2
	8	4.1	75/63	34.9	29.6	45.7	3.2	10.8		60	37.2	28.8	2.7	4.1	
			80/67	37.4	30.7	48.2	3.3	11.5		70	36.6	27.5	2.9	3.7	
			85/71	39.8	32.0	50.7	3.3	12.2		80	36.0	26.1	3.2	3.3	
	10	5.9	75/63	35.4	29.8	45.9	3.2	11.2		60	38.1	29.7	2.7	4.2	
			80/67	37.9	31.1	48.5	3.2	12.0		70	37.5	28.3	2.9	3.8	
			85/71	40.4	32.3	51.0	3.2	12.8		80	36.8	26.8	3.2	3.4	
100	6	2.4	75/63	31.9	28.5	44.2	3.7	8.6	80	2.6	60	40.1	31.5	2.7	4.3
			80/67	34.2	29.6	46.6	3.7	9.2			70	39.5	30.1	3.0	3.9
			85/71	36.3	31.1	48.8	3.7	9.7			80	39.0	28.6	3.3	3.5
	8	3.9	75/63	32.9	28.5	44.7	3.6	9.2		60	41.8	33.0	2.8	4.4	
			80/67	35.1	30.0	47.0	3.6	9.8		70	41.0	31.5	3.0	4.0	
			85/71	37.3	31.5	49.3	3.6	10.4		80	40.4	30.0	3.3	3.6	
	10	5.8	75/63	33.3	28.9	44.9	3.5	9.6		60	42.9	34.1	2.8	4.5	
			80/67	35.7	30.2	47.3	3.5	10.2		70	42.0	32.5	3.0	4.1	
			85/71	38.1	31.5	49.7	3.5	10.9		80	41.3	30.8	3.3	3.7	
110	6	2.3	75/63	29.9	27.7	43.4	4.1	7.3	Extended Range - Anti-freeze required	3.8	60	44.1	35.5	2.7	4.6
			80/67	32.0	28.8	45.6	4.1	7.8			70	43.4	34.1	2.9	4.2
			85/71	34.0	30.3	47.7	4.1	8.3			80	42.7	32.7	3.1	3.8
	8	3.8	75/63	30.6	28.0	43.7	3.9	7.8		60	46.0	37.0	2.6	4.9	
			80/67	32.8	29.3	45.9	3.9	8.3		70	45.3	35.6	2.8	4.5	
			85/71	35.0	30.6	48.2	4.0	8.8		80	44.6	34.2	3.0	4.1	
	10	5.6	75/63	31.1	28.1	43.9	3.9	8.1		60	48.3	39.0	2.5	5.1	
			80/67	33.5	29.1	46.2	3.9	8.7		70	47.6	37.6	2.7	4.7	
			85/71	35.6	30.7	48.5	3.9	9.2		80	46.9	36.1	2.9	4.3	

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

Bosch Thermotechnology Corp.
 Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV048 (1640 CFM)																	
Cooling									Heating								
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP		
50	6	1.0	75/63	49.3	36.9	59.1	2.8	17.5	30	1.1	60	36.0	25.8	3.3	3.16		
			80/67	52.6	38.2	62.4	2.9	18.5				70	35.5	24.4	3.7	2.83	
			85/71	55.9	39.4	65.9	2.9	19.4				80	35.2	22.9	4.0	2.55	
	8	1.7	75/63	50.6	37.5	59.9	2.7	18.8			60	1.9	60	37.2	26.9	3.4	3.23
			80/67	54.0	38.8	63.4	2.7	20.0					70	36.7	25.3	3.7	2.9
			85/71	57.5	40.0	66.9	2.7	21.1					80	36.2	23.8	4.1	2.6
	12	3.5	75/63	51.9	38.0	60.7	2.6	20.3			60	3.8	60	38.5	28.1	3.4	3.32
			80/67	55.5	39.4	64.4	2.6	21.7					70	38.0	26.4	3.7	2.99
			85/71	59.1	40.5	68.1	2.6	23.0					80	37.5	24.7	4.1	2.68
60	6	1.0	75/63	47.2	36.0	57.7	3.1	15.3	40	1.1	60	40.6	29.9	3.4	3.45		
			80/67	50.3	37.3	61.0	3.1	16.2				70	40.1	28.4	3.8	3.12	
			85/71	53.5	38.5	64.3	3.1	17.1				80	39.7	27.0	4.1	2.81	
	8	1.7	75/63	48.4	36.5	58.5	2.9	16.5			60	1.8	60	41.9	31.3	3.5	3.54
			80/67	51.7	37.9	61.8	3.0	17.5					70	41.7	29.6	3.8	3.22
			85/71	55.0	39.0	65.3	3.0	18.5					80	41.1	27.9	4.2	2.89
	12	3.5	75/63	49.7	37.1	59.3	2.8	17.8			60	3.6	60	43.7	33.0	3.5	3.65
			80/67	53.1	38.3	62.8	2.8	19.0					70	43.0	31.3	3.8	3.29
			85/71	56.6	39.6	66.4	2.8	20.2					80	42.6	29.6	4.2	2.97
70	6	1.0	75/63	44.9	35.1	56.4	3.4	13.3	50	2.1	60	45.6	34.4	3.5	3.78		
			80/67	48.0	36.1	59.6	3.4	14.1				70	44.9	33.0	3.9	3.4	
			85/71	51.0	37.5	62.7	3.4	14.9				80	44.5	31.5	4.3	3.06	
	8	1.7	75/63	46.1	35.6	57.1	3.2	14.3			60	3.5	60	47.3	36.3	3.6	3.88
			80/67	49.3	36.6	60.4	3.2	15.3					70	46.7	34.7	3.9	3.5
			85/71	52.5	38.1	63.6	3.2	16.2					80	46.1	33.0	4.3	3.15
	12	3.4	75/63	47.5	35.9	57.9	3.1	15.5			60	7.1	60	49.4	38.4	3.6	4.01
			80/67	50.8	37.2	61.3	3.1	16.6					70	48.7	36.6	4.0	3.61
			85/71	54.1	38.5	64.7	3.1	17.6					80	48.0	34.8	4.3	3.24
80	6	1.0	75/63	42.6	34.1	55.2	3.7	11.5	60	2.1	60	50.9	39.4	3.6	4.11		
			80/67	45.5	35.3	58.2	3.7	12.2				70	50.4	37.8	4.0	3.71	
			85/71	48.3	36.8	61.2	3.8	12.9				80	49.6	36.2	4.4	3.32	
	8	1.6	75/63	43.9	34.3	55.9	3.5	12.4			60	3.4	60	53.0	41.6	3.7	4.22
			80/67	46.8	35.8	58.9	3.6	13.2					70	52.3	39.9	4.0	3.8
			85/71	49.8	37.3	62.1	3.6	14.0					80	51.6	38.1	4.4	3.42
	12	3.3	75/63	45.1	34.9	56.5	3.4	13.4			60	7.0	60	55.6	44.1	3.7	4.37
			80/67	48.2	36.3	59.7	3.4	14.3					70	54.8	42.2	4.1	3.93
			85/71	51.4	37.8	63.0	3.4	15.2					80	53.9	40.2	4.5	3.53
90	6	0.9	75/63	40.3	33.0	54.1	4.1	9.9	70	2.0	60	56.5	44.6	3.7	4.43		
			80/67	43.0	34.5	56.9	4.1	10.5				70	55.8	42.9	4.1	3.99	
			85/71	45.7	35.8	59.8	4.1	11.1				80	55.2	41.1	4.5	3.59	
	8	1.5	75/63	41.4	33.5	54.6	3.9	10.6			60	3.3	60	59.1	47.1	3.8	4.58
			80/67	44.2	35.0	57.5	3.9	11.3					70	58.2	45.3	4.2	4.1
			85/71	47.1	36.3	60.6	3.9	12.0					80	57.3	43.4	4.6	3.68
	12	3.2	75/63	42.6	33.9	55.2	3.7	11.5			60	6.8	60	62.1	50.2	3.8	4.72
			80/67	45.6	35.5	58.2	3.7	12.3					70	61.1	48.0	4.2	4.24
			85/71	48.8	36.5	61.5	3.7	13.1					80	60.0	45.9	4.6	3.8
100	6	0.9	75/63	37.8	32.2	53.0	4.5	8.4	80	2.0	60	62.2	50.0	3.8	4.74		
			80/67	40.4	33.6	55.7	4.5	8.9				70	61.5	48.2	4.2	4.26	
			85/71	43.0	35.0	58.5	4.6	9.4				80	60.7	46.2	4.6	3.83	
	8	1.5	75/63	38.9	32.6	53.5	4.3	9.1			60	3.3	60	65.3	52.9	3.9	4.89
			80/67	41.6	34.0	56.3	4.3	9.6					70	64.4	50.8	4.3	4.4
			85/71	44.4	35.4	59.2	4.3	10.2					80	63.1	48.9	4.7	3.93
	12	3.1	75/63	40.1	33.0	54.0	4.1	9.8			60	6.7	60	69.0	56.1	4.0	5.08
			80/67	42.9	34.5	56.9	4.1	10.4					70	67.6	54.2	4.4	4.54
			85/71	45.9	35.8	59.9	4.1	11.2					80	66.2	51.8	4.8	4.05
110	6	0.9	75/63	35.5	30.9	52.2	5.0	7.2	Extended Range - Anti-freeze required	AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.	Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.	Unit performance may be interpolated. Extrapolation is not allowed.	For conditions other than rating conditions provided, consult the BST selection software.	Ratings below 40°F are with a methanol solution.	DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.		
			80/67	38.0	32.2	54.8	5.0	7.6									
			85/71	40.4	33.8	57.4	5.0	8.1									
	8	1.5	75/63	36.4	31.5	52.5	4.8	7.7									
			80/67	39.1	32.7	55.2	4.8	8.2									
			85/71	41.7	34.1	57.9	4.8	8.7									
	12	3.1	75/63	37.5	32.0	52.9	4.6	8.2									
			80/67	40.2	33.5	55.7	4.6	8.8									
			85/71	43.0	34.7	58.5	4.6	9.4									

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV060 (1900 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	7.5	2.0	75/63	63.1	46.7	73.3	3.4	5.5	30	2.1	60	60	46.1	32.7	4.3	3.2
			80/67	67.6	48.1	77.9	3.4	5.8				70	45.4	30.8	4.6	2.9
			85/71	72.0	49.4	82.5	3.5	6.0				80	44.8	28.9	5.1	2.6
	12	4.6	75/63	65.8	47.5	75.1	3.1	6.2		4.9	60	60	48.7	34.8	4.3	3.3
			80/67	70.3	49.2	79.8	3.2	6.5				70	47.8	33.0	4.7	3.0
			85/71	74.9	50.7	84.6	3.2	6.8				80	47.3	30.5	5.1	2.7
	15	6.8	75/63	66.6	47.9	75.8	3.1	6.3		7.3	60	60	49.6	36.0	4.4	3.3
			80/67	71.2	49.6	80.5	3.1	6.7				70	49.0	33.6	4.7	3.0
			85/71	76.0	51.1	85.5	3.2	7.1				80	48.0	31.3	5.2	2.7
60	7.5	2.0	75/63	60.6	45.2	71.8	3.7	4.8	40	2.0	60	60	51.5	37.7	4.4	3.4
			80/67	64.6	46.8	76.1	3.8	5.0				70	50.9	35.7	4.8	3.1
			85/71	68.8	48.3	80.5	3.8	5.2				80	50.3	33.7	5.2	2.8
	12	4.5	75/63	63.0	46.2	73.3	3.5	5.3		4.7	60	60	54.9	40.4	4.5	3.6
			80/67	67.5	47.9	78.1	3.5	5.7				70	53.7	38.6	4.9	3.2
			85/71	72.0	49.5	82.7	3.5	6.0				80	53.1	36.4	5.3	2.9
	15	6.7	75/63	63.7	46.8	74.0	3.4	5.5		7.0	60	60	56.1	41.5	4.5	3.6
			80/67	68.4	48.4	78.8	3.4	5.8				70	55.0	39.7	4.9	3.3
			85/71	73.1	49.9	83.6	3.5	6.1				80	54.2	37.4	5.3	3.0
70	7.5	1.9	75/63	57.9	44.1	70.3	4.1	4.1	50	2.0	60	60	57.5	43.2	4.6	3.7
			80/67	61.8	45.6	74.5	4.2	4.4				70	56.7	41.2	5.0	3.4
			85/71	65.8	47.1	78.8	4.2	4.6				80	56.3	38.8	5.4	3.1
	12	4.4	75/63	60.2	45.0	71.8	3.8	4.6		4.6	60	60	61.5	47.0	4.7	3.9
			80/67	64.4	46.7	76.1	3.9	4.9				70	60.6	44.8	5.0	3.5
			85/71	68.7	48.3	80.6	3.9	5.2				80	59.6	42.6	5.5	3.2
	15	6.5	75/63	61.0	45.4	72.4	3.8	4.8		6.8	60	60	63.2	48.2	4.7	4.0
			80/67	65.3	47.0	76.8	3.8	5.0				70	62.0	46.2	5.1	3.6
			85/71	69.6	49.2	81.4	3.8	5.3				80	61.3	43.3	5.5	3.3
80	7.5	2.0	75/63	55.0	42.7	68.9	4.5	3.6	60	2.0	60	60	64.0	49.1	4.7	4.0
			80/67	58.7	44.4	72.8	4.6	3.8				70	63.2	47.1	5.1	3.6
			85/71	62.3	46.5	76.8	4.6	3.9				80	62.4	45.0	5.5	3.3
	12	3.3	75/63	57.1	44.1	70.0	4.2	4.0		4.5	60	60	69.0	53.6	4.8	4.2
			80/67	61.4	45.6	74.4	4.2	4.2				70	67.8	51.4	5.2	3.8
			85/71	65.5	47.2	78.8	4.3	4.5				80	67.0	48.5	5.7	3.5
	15	4.9	75/63	58.2	44.1	70.9	4.2	4.1		6.7	60	60	71.0	55.3	4.9	4.3
			80/67	62.3	45.9	75.1	4.2	4.4				70	69.6	53.2	5.3	3.9
			85/71	66.5	47.5	79.5	4.2	4.6				80	68.4	50.5	5.7	3.5
90	7.5	1.4	75/63	51.8	41.8	67.3	5.0	3.1	70	1.9	60	60	70.9	55.5	4.9	4.3
			80/67	55.7	43.3	71.3	5.0	3.2				70	69.9	53.4	5.3	3.9
			85/71	59.4	44.6	75.3	5.1	3.4				80	69.1	51.1	5.7	3.5
	12	3.2	75/63	54.4	42.4	68.7	4.7	3.4		4.4	60	60	76.8	60.8	5.0	4.5
			80/67	58.2	44.0	72.7	4.7	3.6				70	75.3	58.4	5.4	4.1
			85/71	62.1	45.7	76.8	4.7	3.8				80	74.1	55.7	5.9	3.7
	15	4.7	75/63	55.1	42.7	69.2	4.6	3.5		6.5	60	60	79.1	62.9	5.0	4.6
			80/67	59.0	44.6	73.3	4.6	3.7				70	77.6	60.1	5.5	4.2
			85/71	63.3	46.3	77.7	4.7	4.0				80	76.1	57.6	5.9	3.8
100	7.5	1.4	75/63	49.1	40.2	66.3	5.5	2.6	80	2.0	60	60	78.1	62.2	5.0	4.6
			80/67	52.5	41.8	69.9	5.6	2.8				70	77.1	59.7	5.4	4.1
			85/71	55.9	43.5	73.6	5.7	2.9				80	75.9	57.4	5.9	3.8
	12	3.1	75/63	51.2	41.1	67.2	5.2	2.9		3.3	60	60	84.9	68.4	5.2	4.8
			80/67	55.0	42.9	71.2	5.2	3.1				70	83.3	65.4	5.6	4.4
			85/71	58.7	44.7	75.1	5.2	3.3				80	81.8	62.7	6.1	3.9
	15	4.6	75/63	51.8	41.8	67.6	5.1	3.0		4.9	60	60	87.6	70.7	5.3	4.9
			80/67	55.8	43.3	71.8	5.1	3.2				70	85.8	67.6	5.7	4.4
			85/71	59.7	45.0	75.8	5.2	3.4				80	84.0	64.8	6.1	4.0
110	7.5	1.3	75/63	46.1	38.7	65.3	6.1	2.2	Extended Range - Anti-freeze required	2.0	60	60	87.6	70.7	5.3	4.9
			80/67	48.7	41.7	68.5	6.2	2.3				70	85.8	67.6	5.7	4.4
			85/71	51.6	44.2	71.8	6.2	2.4				80	84.0	64.8	6.1	4.0
	12	3.1	75/63	47.9	40.0	65.9	5.8	2.4		3.3	60	60	87.6	70.7	5.3	4.9
			80/67	51.6	41.6	69.8	5.8	2.6				70	85.8	67.6	5.7	4.4
			85/71	55.1	43.2	73.5	5.8	2.8				80	84.0	64.8	6.1	4.0
	15	4.5	75/63	48.8	40.1	66.5	5.7	2.5		4.9	60	60	87.6	70.7	5.3	4.9
			80/67	52.4	41.9	70.2	5.7	2.7				70	85.8	67.6	5.7	4.4
			85/71	56.0	43.5	74.0	5.7	2.9				80	84.0	64.8	6.1	4.0

Extended Range - Anti-freeze required
 AHRI/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHRI/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.
DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

LV Model Series - Commercial Water Source Heat Pumps



Capacity Data LV070 (2000 CFM)																
Cooling									Heating							
Entering Water Temp (°F)	Water flow (GPM)	Pressure Drop PSI (FOH)	Entering Air Temp DB/WB (°F)	Total Capacity (MBTUH)	Sensible Capacity (MBTUH)	Heat of Rejection (MBTUH)	Power (kW)	EER	Entering Fluid Temp (°F)	Pressure Drop PSI (FOH)	Entering Air Temp (°F)	Total Capacity (MBTUH)	Heat of Absorption (MBTUH)	Power Input (kW)	COP	
50	9	2.1	75/63	66.6	48.3	80.1	3.9	17.0	30	2.3	60	5.5	4.0	0.6	2.9	
			80/67	71.1	50.0	84.8	4.0	17.9			70	5.4	3.8	0.6	2.7	
			85/71	75.7	51.6	89.6	4.0	18.8			80	5.3	3.6	0.6	2.5	
	13.5	4.4	75/63	68.8	49.3	81.4	3.7	18.7		60	5.9	4.4	0.6	3.1		
			80/67	73.5	51.0	86.3	3.7	19.8		70	5.7	4.1	0.6	2.8		
			85/71	78.4	52.6	91.4	3.8	20.9		80	5.6	3.9	0.6	2.6		
	18	7.3	75/63	69.9	49.8	82.1	3.5	19.7		60	6.2	4.7	0.6	3.3		
			80/67	74.9	51.3	87.2	3.6	20.9		70	6.1	4.4	0.6	2.9		
			85/71	79.8	53.3	92.3	3.6	22.1		80	6.0	4.2	0.6	2.7		
60	9	2.1	75/63	63.6	47.1	78.3	4.3	14.9	40	2.2	60	6.4	4.8	0.6	3.3	
			80/67	67.9	48.9	82.8	4.3	15.7			70	6.2	4.6	0.6	3.0	
			85/71	72.4	50.3	87.5	4.4	16.5			80	6.1	4.3	0.7	2.8	
	13.5	4.2	75/63	65.7	48.2	79.5	4.0	16.4		60	6.8	5.3	0.6	3.5		
			80/67	70.3	49.9	84.3	4.1	17.3		70	6.7	5.0	0.6	3.2		
			85/71	75.0	51.5	89.2	4.1	18.3		80	6.5	4.7	0.7	2.9		
	18	7.1	75/63	66.8	48.7	80.2	3.9	17.2		60	7.3	5.7	0.6	3.7		
			80/67	71.6	50.3	85.1	3.9	18.3		70	7.1	5.4	0.6	3.3		
			85/71	76.5	51.8	90.1	4.0	19.3		80	6.9	5.0	0.7	3.0		
70	9	2.0	75/63	60.5	46.0	76.4	4.7	13.0	50	2.1	60	7.2	5.7	0.6	3.7	
			80/67	64.5	47.9	80.7	4.7	13.7			70	7.1	5.4	0.6	3.3	
			85/71	69.0	49.0	85.4	4.8	14.4			80	7.0	5.1	0.7	3.0	
	13.5	4.2	75/63	62.6	46.9	77.6	4.4	14.3		60	7.8	6.2	0.6	3.9		
			80/67	67.0	48.6	82.2	4.4	15.1		70	7.6	5.9	0.6	3.5		
			85/71	71.6	50.0	87.0	4.5	16.0		80	7.4	5.5	0.7	3.2		
	18	6.9	75/63	63.7	47.3	78.3	4.3	15.0		60	8.3	6.7	0.6	4.1		
			80/67	68.3	48.8	83.0	4.3	15.9		70	8.1	6.3	0.6	3.7		
			85/71	72.8	50.8	87.8	4.3	16.8		80	7.9	6.0	0.7	3.3		
80	9	2.0	75/63	57.3	44.9	74.7	5.1	11.3	60	2.1	60	8.1	6.5	0.6	4.1	
			80/67	61.4	46.1	79.0	5.1	11.9			70	8.0	6.2	0.6	3.7	
			85/71	65.4	47.7	83.3	5.2	12.5			80	7.8	5.9	0.7	3.3	
	13.5	4.1	75/63	59.4	45.5	75.8	4.8	12.4		60	8.8	7.1	0.6	4.3		
			80/67	63.7	47.0	80.3	4.8	13.1		70	8.6	6.8	0.6	3.9		
			85/71	67.9	49.0	84.7	4.9	13.9		80	8.4	6.4	0.7	3.5		
	18	6.8	75/63	60.4	46.0	76.4	4.7	13.0		60	9.4	7.8	0.6	4.6		
			80/67	64.9	47.5	80.9	4.7	13.8		70	9.2	7.4	0.7	4.1		
			85/71	69.2	49.5	85.5	4.7	14.6		80	8.9	7.0	0.7	3.7		
90	9	1.9	75/63	54.0	43.6	73.1	5.6	9.7	70	2.0	60	9.0	7.4	0.6	4.4	
			80/67	57.9	45.1	77.2	5.6	10.3			70	8.9	7.1	0.7	4.0	
			85/71	61.6	47.1	81.1	5.7	10.8			80	8.7	6.8	0.7	3.6	
	13.5	3.9	75/63	56.1	44.1	74.1	5.3	10.6		60	9.8	8.2	0.6	4.8		
			80/67	60.0	46.2	78.2	5.3	11.3		70	9.6	7.8	0.7	4.3		
			85/71	64.3	47.3	82.6	5.4	12.0		80	9.4	7.4	0.7	3.9		
	18	6.5	75/63	57.2	44.3	74.7	5.1	11.2		60	10.5	8.9	0.6	5.1		
			80/67	61.3	46.1	78.9	5.2	11.9		70	10.3	8.5	0.7	4.5		
			85/71	65.4	48.3	83.3	5.2	12.6		80	10.0	8.0	0.7	4.1		
100	9	1.9	75/63	50.7	42.2	71.6	6.1	8.3	80	2.0	60	10.0	8.4	0.6	4.9	
			80/67	54.1	44.2	75.4	6.2	8.7			70	9.8	8.0	0.7	4.4	
			85/71	57.8	45.8	79.3	6.3	9.3			80	9.6	7.6	0.7	3.9	
	13.5	3.8	75/63	52.6	43.0	72.4	5.8	9.1		60	10.8	9.2	0.6	5.2		
			80/67	56.4	44.9	76.4	5.8	9.7		70	10.6	8.8	0.7	4.7		
			85/71	60.3	46.4	80.5	5.9	10.3		80	10.4	8.4	0.7	4.2		
	18	6.4	75/63	53.6	43.4	72.9	5.6	9.5		60	11.7	10.1	0.6	5.6		
			80/67	57.6	45.0	77.0	5.7	10.1		70	11.4	9.6	0.7	5.0		
			85/71	61.7	46.6	81.2	5.7	10.8		80	11.1	9.1	0.7	4.5		
110	9	1.8	75/63	47.6	40.6	70.6	6.8	7.0	Extended Range - Anti-freeze required	2.0	60	10.0	8.4	0.6	4.9	
			80/67	50.9	43.7	74.1	6.8	7.5			70	9.8	8.0	0.7	4.4	
			85/71	54.1	44.4	77.7	6.9	7.9			80	9.6	7.6	0.7	3.9	
	13.5	3.8	75/63	49.3	41.2	71.1	6.4	7.7		60	10.8	9.2	0.6	5.2		
			80/67	52.6	44.9	74.7	6.5	8.1		70	10.6	8.8	0.7	4.7		
			85/71	56.5	44.9	78.7	6.5	8.7		80	10.4	8.4	0.7	4.2		
	18	6.3	75/63	50.2	41.4	71.5	6.3	8.0		60	11.7	10.1	0.6	5.6		
			80/67	53.8	43.7	75.2	6.3	8.6		70	11.4	9.6	0.7	5.0		
			85/71	57.7	45.3	79.2	6.3	9.1		80	11.1	9.1	0.7	4.5		

Extended Range - Anti-freeze required
 AHR/ISO13256-1 certified performance is rated at entering air conditions of 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.
 Tabulated unit performance does not include fan or pump power corrections required for AHR/ISO standard performance ratings.
 Unit performance may be interpolated. Extrapolation is not allowed.
 For conditions other than rating conditions provided, consult the BST selection software.
 Ratings below 40°F are with a methanol solution.

DISCLAIMER: The performance reported herein is based on testing by FHP. Variations in the installation and operational environment may alter performance. Bosch disclaims all warranties, express and implied, that the performance will be as reported, including the warranty of merchantability and fitness for purpose. In addition, continuous research and development may result in a change to an appliances design and specifications at the time of order, which Bosch may change without notice. Before purchase, confirm the design specifications of the appliance.

Bosch Thermotechnology Corp.
 Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

LV007 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	1.4	Operation Not Recommended				58-68	275-285	5-6	19-23
	1.9	Operation Not Recommended				62-72	280-290	3-4	20-24
40	1.4	106-129	146-178	17-21	18-22	71-81	290-300	7-8	22-26
	1.9	102-124	133-162	10-13	19-23	77-87	296-306	4-5	23-27
50	1.4	115-141	180-220	17-20	17-21	88-98	308-318	7-8	25-29
	1.9	111-135	163-200	10-12	18-23	95-105	315-325	4-5	27-31
60	1.4	124-152	213-261	16-19	17-21	105-115	324-334	9-10	28-32
	1.9	120-146	194-237	10-12	18-22	114-124	331-341	5-6	30-34
70	1.4	134-163	247-302	9-11	17-20	125-135	340-350	10-11	32-36
	1.9	128-157	225-275	9-11	18-21	135-145	348-358	6-7	33-37
80	1.4	143-175	281-343	14-18	16-20	146-156	356-366	12-13	35-39
	1.9	137-168	255-312	9-11	17-21	159-169	366-376	7-8	37-41
90	1.4	152-186	315-385	14-17	16-19	169-179	374-384	13-14	39-43
	1.9	146-179	286-350	8-10	17-20	186-196	386-396	8-9	41-45
100	1.4	161-197	349-426	13-16	15-19	Operation Not Recommended			
	1.9	155-190	317-387	8-10	16-20	Operation Not Recommended			

LV009 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	1.8	Operation Not Recommended				91-111	251-307	5-6	21-25
	2.4	Operation Not Recommended				95-116	256-313	3-4	22-26
40	1.8	112-137	144-176	14-17	22-27	107-130	267-327	6-7	24-29
	2.4	106-130	137-167	10-12	23-28	112-137	273-333	4-5	25-30
50	1.8	116-142	177-217	13-16	21-26	123-150	284-347	7-9	27-33
	2.4	111-135	169-206	9-12	22-27	129-158	289-353	5-6	28-34
60	1.8	121-148	211-258	13-16	21-26	139-170	300-366	8-10	30-37
	2.4	115-140	200-245	9-11	22-27	146-179	306-374	6-7	32-39
70	1.8	126-154	245-299	13-15	20-25	156-190	316-386	9-12	33-41
	2.4	119-146	232-284	9-11	21-26	163-200	322-394	7-8	35-43
80	1.8	130-159	278-340	12-15	20-24	172-210	332-406	11-13	36-44
	2.4	124-151	264-323	9-11	21-26	180-220	339-414	8-9	38-47
90	1.8	135-165	312-381	12-15	19-24	188-230	349-426	12-15	39-48
	2.4	128-157	296-362	9-10	20-25	197-241	355-434	8-10	41-51
100	1.8	140-171	345-422	12-14	19-23	Operation Not Recommended			
	2.4	133-162	328-401	8-10	20-24	Operation Not Recommended			

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

LV012 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	2.6	Operation Not Recommended				73-89	266-325	5-6	15-18
	3					77-94	272-333	3-4	16-19
40	2.6	117-143	189-231	14-17	18-22	86-105	279-341	6-7	17-21
	3	112-137	178-217	8-9	19-24	90-110	286-350	4-5	18-22
50	2.6	126-154	221-270	14-17	18-21	162-198	293-358	7-8	20-24
	3	121-148	207-253	8-9	19-23	170-208	300-366	5-6	21-25
60	2.6	131-160	252-308	13-16	17-21	110-134	306-374	8-10	22-27
	3	125-153	237-290	8-9	18-22	115-141	314-383	6-7	23-29
70	2.6	135-165	284-347	13-16	17-20	122-150	320-391	9-11	24-30
	3	130-158	266-326	7-9	18-22	129-157	327-400	6-8	26-32
80	2.6	140-171	320-391	13-16	16-20	134-164	333-407	11-13	27-33
	3	134-164	300-367	7-9	17-21	141-172	341-417	7-9	28-35
90	2.6	144-176	360-440	13-16	16-19	147-179	347-424	12-14	29-36
	3	138-169	338-414	7-9	17-21	154-188	355-434	8-10	31-38
100	2.6	149-182	405-495	13-15	15-19	Operation Not Recommended			
	3	143-174	381-465	7-9	16-20				

LV015 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	2.8	Operation Not Recommended				74-90	244-299	3-4	13-15
	3.8					78-95	251-306	2-3	13-16
40	2.8	122-149	183-224	14-18	19-23	87-106	257-314	4-5	15-18
	3.8	117-143	172-210	8-10	20-24	91-111	263-322	3-3	16-19
50	2.8	131-160	214-261	14-18	18-22	164-201	269-329	5-6	17-20
	3.8	126-154	201-245	8-10	19-24	173-211	276-337	3-4	18-22
60	2.8	136-166	244-298	14-17	18-22	111-136	282-344	6-7	19-23
	3.8	131-160	230-281	8-10	19-23	117-143	289-353	4-5	20-24
70	2.8	141-172	275-336	14-17	17-21	124-152	294-360	7-8	21-25
	3.8	135-165	258-316	8-10	18-22	131-160	302-369	5-6	22-27
80	2.8	145-178	310-378	14-17	17-20	136-166	307-375	8-9	23-28
	3.8	140-171	291-356	8-10	18-22	143-175	314-384	5-6	24-30
90	2.8	150-183	349-426	14-17	16-20	149-182	319-390	8-10	25-30
	3.8	144-176	328-401	8-9	17-21	156-191	327-400	6-7	26-32
100	2.8	155-189	392-480	13-16	16-19	Operation Not Recommended			
	3.8	149-182	369-451	8-9	17-21				

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

LV018 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	3	Operation Not Recommended				58-68	270-290	5-6	19-23
	5	Operation Not Recommended				62-72	275-295	3-4	20-24
40	3	122-140	220-240	17-19	21-25	71-81	285-305	7-8	22-26
	5	120-138	192-212	10-12	22-26	77-87	291-311	4-5	23-27
50	3	123-141	236-256	15-17	21-25	88-98	303-323	7-8	25-29
	5	122-140	214-234	9-11	21-25	95-105	310-330	4-5	27-31
60	3	124-142	268-288	15-17	20-24	105-115	319-339	9-10	28-32
	5	123-141	246-266	9-11	21-25	114-124	326-346	5-6	30-34
70	3	126-144	305-325	14-16	20-24	125-135	335-355	10-11	32-36
	5	125-143	282-302	8-10	20-24	135-145	343-363	6-7	33-37
80	3	128-146	346-366	14-16	19-23	146-156	351-371	12-13	35-39
	5	127-145	323-343	8-10	20-24	159-169	361-381	7-8	37-41
90	3	130-148	392-412	14-16	19-23	169-179	369-389	13-14	39-43
	5	129-147	368-388	8-10	19-23	186-196	381-401	8-9	41-45
100	3	132-150	442-462	14-16	18-22	Operation Not Recommended			
	5	131-149	418-438	8-10	18-22	Operation Not Recommended			

LV024 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	4	Operation Not Recommended				69-79	276-296	5-6	19-23
	6	Operation Not Recommended				73-83	281-301	3-4	20-24
40	4	123-140	216-234	17-19	22-26	83-93	291-311	7-8	22-26
	6	122-139	196-214	11-13	22-26	87-97	296-316	4-5	23-27
50	4	124-141	234-252	15-17	21-25	100-110	310-330	7-8	25-29
	6	123-140	218-236	10-12	22-26	106-116	316-336	5-6	26-30
60	4	126-143	269-287	15-17	21-25	118-128	329-349	9-10	28-32
	6	125-142	252-270	10-12	21-25	125-135	336-356	6-7	29-33
70	4	128-145	307-325	15-17	20-24	139-149	347-367	10-11	31-35
	6	127-144	290-308	9-11	20-24	147-157	354-374	7-8	33-37
80	4	130-147	349-367	14-16	19-23	160-170	364-384	11-12	35-39
	6	129-146	333-351	9-11	20-24	171-181	372-392	8-9	36-40
90	4	132-149	396-414	14-16	19-23	185-195	382-402	13-14	38-42
	6	131-148	380-398	9-11	19-23	199-209	391-411	9-10	40-44
100	4	134-151	449-467	14-16	18-22	Operation Not Recommended			
	6	133-150	432-450	9-11	18-22	Operation Not Recommended			

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

LV030 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	4	Operation Not Recommended				64-74	289-309	7-8	19-23
	7					70-80	295-315	4-5	20-24
40	4	120-138	233-251	20-22	21-25	77-87	305-325	8-9	22-26
	7	118-136	200-218	11-13	22-26	84-94	314-334	5-6	23-27
50	4	121-139	249-267	18-20	21-25	94-104	327-347	9-10	25-29
	7	120-138	223-241	10-12	21-25	103-113	336-356	5-6	27-31
60	4	123-141	283-301	18-20	21-25	111-121	344-364	10-11	28-32
	7	122-140	257-275	10-12	21-25	122-132	354-374	6-7	30-34
70	4	125-143	323-341	17-19	20-24	130-140	361-381	12-13	32-36
	7	123-141	295-313	10-12	20-24	143-153	373-393	7-8	34-38
80	4	127-145	366-384	17-19	19-23	150-160	378-398	14-15	35-39
	7	126-144	341-359	9-11	19-23	167-177	392-412	8-9	38-42
90	4	129-147	414-432	17-19	19-23	173-183	397-417	16-17	39-43
	7	128-146	388-406	9-11	19-23	193-203	413-433	9-10	41-45
100	4	131-149	466-484	17-19	18-22	Operation Not Recommended			
	7	130-148	441-459	9-11	18-22				

LV036 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	4.5	Operation Not Recommended				60-70	278-298	7-8	17-21
	9					66-76	285-305	3-4	18-22
40	4.5	119-135	226-250	23-25	22-26	72-82	292-312	9-10	19-23
	9	116-132	183-207	11-13	23-27	81-91	302-322	4-5	21-25
50	4.5	121-137	259-283	22-24	21-25	86-96	308-328	10-11	22-26
	9	118-134	214-238	11-13	22-26	97-107	319-339	5-6	24-28
60	4.5	123-139	295-319	22-24	21-25	101-111	323-343	12-13	25-29
	9	120-136	248-272	11-13	21-25	115-125	335-355	6-7	27-31
70	4.5	124-140	335-359	22-24	20-24	117-127	337-357	14-15	28-32
	9	122-138	285-309	10-12	21-25	135-145	352-372	7-8	31-35
80	4.5	126-142	378-402	21-23	20-24	135-145	352-372	16-17	31-35
	9	124-140	327-351	10-12	20-24	157-167	370-390	8-9	34-38
90	4.5	128-144	425-449	20-22	19-23	155-165	369-389	17-18	34-38
	9	126-142	372-396	10-12	20-24	181-191	390-410	9-10	38-42
100	4.5	130-146	477-501	20-22	19-23	Operation Not Recommended			
	9	128-144	423-447	10-12	19-23				

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series -
Commercial Water Source Heat Pumps



BOSCH

LV041 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	6	Operation Not Recommended				62-82	326-346	8-9	19-23
	9					68-88	334-354	4-5	21-25
40	6	120-136	197-227	17-19	22-26	74-94	341-361	9-10	22-26
	9	119-135	176-206	11-13	22-26	82-102	351-371	5-6	23-27
50	6	122-138	229-259	16-18	21-25	88-108	357-377	11-12	24-28
	9	121-137	207-237	11-13	22-26	98-118	369-389	6-7	27-31
60	6	124-140	264-294	16-18	21-25	102-122	374-394	12-13	28-32
	9	123-139	241-271	10-12	21-25	116-136	390-410	7-8	30-34
70	6	126-142	303-333	15-17	20-24	118-138	393-413	14-15	31-35
	9	125-141	278-308	10-12	21-25	135-155	412-432	8-9	33-37
80	6	128-144	346-376	15-17	20-24	136-156	413-433	16-17	34-38
	9	127-143	321-351	10-12	20-24	157-177	436-456	9-10	37-41
90	6	131-147	393-423	15-17	19-23	156-176	434-454	18-19	37-41
	9	130-146	366-396	10-12	20-24	181-201	461-481	10-11	41-45
100	6	133-149	443-473	14-16	19-23	Operation Not Recommended			
	9	132-148	416-446	9-11	19-23				

LV042 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	6	Operation Not Recommended				65-75	280-304	6-7	18-22
	10					69-79	285-309	3-4	19-23
40	6	120-136	209-233	18-20	21-25	77-87	294-318	7-8	20-24
	10	119-135	182-206	11-13	22-26	83-93	301-325	4-5	21-25
50	6	122-138	241-265	18-20	21-25	91-101	309-333	8-9	23-27
	10	120-136	212-236	11-13	21-25	99-109	316-340	5-6	24-28
60	6	124-140	276-300	17-19	20-24	107-117	322-346	10-11	26-30
	10	122-138	245-269	10-12	21-25	116-126	330-354	6-7	27-31
70	6	126-142	315-339	17-19	20-24	123-133	336-360	11-12	28-32
	10	124-140	282-306	10-12	20-24	136-146	346-370	7-8	30-34
80	6	127-143	357-381	17-19	19-23	142-152	351-375	13-14	31-35
	10	126-142	323-347	10-12	20-24	158-168	363-387	8-9	33-37
90	6	129-145	403-427	17-19	19-23	163-173	367-391	14-15	34-38
	10	128-144	369-393	9-11	19-23	182-192	380-404	9-10	37-41
100	6	Operation Not Recommended				Operation Not Recommended			
	10								

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

LV048 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	6	Operation Not Recommended				62-82	326-346	8-9	19-23
	12	Operation Not Recommended				68-88	334-354	4-5	21-25
40	6	113-129	216-236	22-24	22-26	74-94	341-361	9-10	22-26
	12	110-126	179-199	11-13	22-26	82-102	351-371	5-6	23-27
50	6	115-131	247-267	22-24	21-25	88-108	357-377	11-12	24-28
	12	112-128	208-228	11-13	22-26	98-118	369-389	6-7	27-31
60	6	116-132	282-302	21-23	21-25	102-122	374-394	12-13	28-32
	12	114-130	240-260	10-12	21-25	116-136	390-410	7-8	30-34
70	6	119-135	320-340	20-22	20-24	118-138	393-413	14-15	31-35
	12	116-132	276-296	10-12	21-25	135-155	412-432	8-9	33-37
80	6	121-137	361-381	20-22	20-24	136-156	413-433	16-17	34-38
	12	118-134	315-335	10-12	20-24	157-177	436-456	9-10	37-41
90	6	122-138	406-426	20-22	19-23	156-176	434-454	18-19	37-41
	12	120-136	358-378	10-12	20-24	181-201	461-481	10-11	41-45
100	6	125-141	454-474	19-21	19-23	Operation Not Recommended			
	12	122-138	406-426	10-12	19-23	Operation Not Recommended			

LV060 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	8	Operation Not Recommended				68-84	256-313	5-7	19-23
	12	Operation Not Recommended				73-89	261-319	4-5	20-25
40	8	113-138	173-212	18-22	19-23	81-99	277-339	7-8	22-26
	12	110-134	162-198	12-14	20-24	86-105	283-346	5-6	23-28
50	8	116-142	207-253	17-21	19-23	93-114	299-365	8-9	24-29
	12	112-137	193-236	12-14	19-24	99-121	305-373	6-7	25-31
60	8	118-145	240-293	17-21	18-23	106-129	321-392	9-11	26-32
	12	115-140	224-274	11-14	19-23	113-138	327-400	7-8	28-34
70	8	121-148	273-334	17-21	18-22	118-145	342-418	10-12	29-35
	12	117-143	255-312	11-14	19-23	126-154	349-427	8-9	30-37
80	8	123-151	307-375	16-20	18-22	131-160	364-444	11-14	31-38
	12	120-146	287-350	11-13	19-23	139-170	371-454	8-10	33-40
90	8	126-154	340-416	16-20	18-22	143-175	385-471	12-15	33-41
	12	122-149	318-388	11-13	18-22	152-186	393-480	9-11	35-43
100	8	128-157	373-456	16-19	17-21	Operation Not Recommended			
	12	125-152	349-426	11-13	18-22	Operation Not Recommended			

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series -
Commercial Water Source Heat Pumps



BOSCH

LV070 - Temperature Pressure Operating Data									
Enter Fluid Temp (°F)	Water Flow (GPM)	Cooling				Heating			
		Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Rise °F	Air Temp Drop °F	Suction Pressure (PSIG)	Discharge Pressure (PSIG)	Water Temp Drop °F	Air Temp Rise °F
30	12	Operation Not Recommended				68-84	256-313	5-7	19-23
	16	Operation Not Recommended				73-89	261-319	4-5	20-25
40	12	117-143	182-222	11-14	21-26	81-99	277-339	7-8	22-26
	16	114-139	170-208	15-18	22-27	86-105	283-346	5-6	23-28
50	12	120-147	215-263	14-17	20-25	93-114	299-365	8-9	24-29
	16	117-143	201-246	11-13	21-26	99-121	305-373	6-7	25-31
60	12	123-150	248-304	14-17	20-24	106-129	321-392	9-11	26-32
	16	119-146	232-284	10-13	21-25	113-138	327-400	7-8	28-34
70	12	126-154	282-344	14-17	19-24	118-145	342-418	10-12	29-35
	16	122-149	263-322	10-13	20-25	126-154	349-427	8-9	30-37
80	12	129-157	315-385	13-16	19-23	131-160	364-444	11-14	31-38
	16	125-153	294-360	10-12	19-24	139-170	371-454	8-10	33-40
90	12	132-161	348-426	13-16	18-22	143-175	385-471	12-15	33-41
	16	128-156	326-398	10-12	19-23	152-186	393-480	9-11	35-43
100	12	134-164	382-466	12-15	17-21	Operation Not Recommended			
	16	131-160	357-436	9-11	18-22	Operation Not Recommended			

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



Electrical Data - PSC (Standard) Blower Motor

Model	Voltage Code	Voltage/Hz/Phase	Voltage Min/Max	Compressor				Blower Motor			Single Point Power			Dual Point Power					
				Compressor Model	Qty	RLA	LRA	FLA	HP	Total Unit FLA	Min. Circuit Amps	MOP CALC	MOP	Compressor Circuit			Blower Motor Circuit		
														Min. Circuit Amps	MOP CALC	MOP	Min. Circuit Amps	MOP CALC	MOP
LV007	1	208-230/1/60	197/253	R/HGA5453BXD	1	2.5	17.7	0.96	0.1	3.5	4.1	6.6	15	3.1	5.6	15	1.2	2.2	15
	2	265/1/60	238/292	R/HGA5453BXV	1	2.1	13.5	0.85	0.1	3.0	3.5	5.6	15	2.6	4.7	15	1.1	1.9	15
LV009	1	208-230/1/60	197/253	R/HGA5471BXD	1	3.4	22.2	0.96	0.1	4.4	5.2	8.6	15	4.3	7.7	15	1.2	2.2	15
	2	265/1/60	238/292	R/HGA5471BXV	1	2.9	18.8	0.85	0.1	3.8	4.5	7.4	15	3.6	6.5	15	1.1	1.9	15
LV012	0	115/1/60	103/126	R/HGA5494BAA	1	9.6	58.4	2.2	0.1	11.8	14.2	23.8	20	12.0	21.6	20	2.8	5.0	15
	1	208-230/1/60	197/253	R/HGA5494BXD	1	4.6	27.9	0.96	0.1	5.6	6.7	11.3	15	5.8	10.4	15	1.2	2.2	15
LV015	2	265/1/60	238/292	R/HGA5494BXV	1	3.8	22.2	0.85	0.1	4.7	5.6	9.4	15	4.8	8.6	15	1.1	1.9	15
	1	208-230/1/60	197/253	RGA5512BXD	1	5.6	29.0	1.10	0.17	6.7	8.1	13.7	15	7.0	12.6	15	1.4	2.5	15
LV018	2	265/1/60	238/292	RGA5512BXV	1	4.6	20.0	0.90	0.17	5.5	6.7	11.3	15	5.8	10.4	15	1.1	2.0	15
	1	208-230/1/60	197/253	GK151KAAA3	1	7.4	33	1.8	0.25	9.2	11.1	18.5	15	9.3	16.7	15	2.3	4.1	15
LV024	2	265/1/60	238/292	GK151QAAA3	1	6.0	28	1.6	0.25	7.6	9.1	15.1	15	7.5	13.5	15	2.0	3.6	15
	1	208-230/1/60	197/253	ZP20K5EPFV	1	13.5	58.3	1.8	0.25	15.3	18.7	32.2	30	16.9	30.4	30	2.3	4.1	15
LV030	2	265/1/60	238/292	ZP20K5EPFJ	1	9.0	54	1.6	0.25	10.6	12.9	21.9	20	11.3	20.3	20	2.0	3.6	15
	3	208-230/3/60	197/253	ZP20K5ETF5	1	7.1	55.4	1.8	0.25	8.9	10.7	17.8	15	8.9	16.0	15	2.3	4.1	15
	4	460/3/60	414/506	ZP20K5ETFD	1	3.5	28	0.9	0.25	4.4	5.3	8.8	15	4.4	7.9	15	1.1	2.0	15
	1	208-230/1/60	197/253	ZP24K5EPFV	1	12.8	64	1.8	0.25	14.6	17.8	30.6	30	16.0	28.8	25	2.3	4.1	15
LV036	2	265/1/60	238/292	ZP24K5EPFJ	1	10.9	60	1.6	0.25	12.5	15.2	26.1	25	13.6	24.5	20	2.0	3.6	15
	3	208-230/3/60	197/253	ZP24K5ETF5	1	8.3	58	1.8	0.25	10.1	12.2	20.5	20	10.4	18.7	15	2.3	4.1	15
	4	460/3/60	414/506	ZP24K5ETFD	1	5.1	28	0.9	0.25	6.0	7.3	12.4	15	6.4	11.5	15	1.1	2.0	15
LV041	1	208-230/1/60	197/253	ZP31K6EPFV	1	15.4	83.9	4.4	0.5	19.8	23.7	39.1	35	19.3	34.7	30	5.5	9.9	15
	2	265/1/60	238/292	ZP31K5EPFJ + OLR*	1	11.6	72	3.3	0.5	14.9	17.8	29.4	25	14.5	26.1	25	4.1	7.4	15
	3	208-230/3/60	197/253	ZP31K5ETF5 / ZP31K6ETF5	1	10.4	73	4.4	0.5	14.8	17.4	27.8	25	13.0	23.4	20	5.5	9.9	15
	4	460/3/60	414/506	ZP31K5ETFD / ZP31K6ETFD	1	5.8	38	1.8	0.5	7.6	9.1	14.9	15	7.3	13.1	15	2.3	4.1	15
LV042	1	208-230/1/60	197/253	ZP31K6EPFV	1	15.4	83.9	4.4	0.75	19.8	23.7	39.1	35	19.3	34.7	30	5.5	9.9	15
	3	208-230/3/60	197/253	ZP31K6ETF5	1	10.4	73	4.4	0.75	14.8	17.4	27.8	25	13.0	23.4	20	5.5	9.9	15
	4	460/3/60	414/506	ZP31K6ETFD	1	5.8	38	2.8	0.75	8.6	10.1	15.9	15	7.3	13.1	15	3.5	6.3	15
LV048	1	208-230/1/60	197/253	ZP34K6EPFV + OLR*	1	16.2	109	4.4	0.5	20.6	24.7	40.9	40	20.3	36.5	35	5.5	9.9	15
	3	208-230/3/60	197/253	ZP34K6ETF5	1	11.2	84	4.4	0.5	15.6	18.4	29.6	25	14.0	25.2	25	5.5	9.9	15
	4	460/3/60	414/506	ZP34K6ETFD	1	5.6	44	1.8	0.5	7.4	8.8	14.4	15	7.0	12.6	15	2.3	4.1	15
LV060	1	208-230/1/60	197/253	ZP42K6EPFV	1	19.6	130	4.4	0.75	24.0	28.9	48.5	45	24.5	44.1	40	5.5	9.9	15
	3	208-230/3/60	197/253	ZP42K6ETF5	1	13.7	83.1	4.4	0.75	18.1	21.5	35.2	35	17.1	30.8	30	5.5	9.9	15
	4	460/3/60	414/506	ZP42K6ETFD	1	6.2	41	2.8	0.75	9.0	10.6	16.8	15	7.8	14.0	15	3.5	6.3	15
	5	575/3/60	517/633	ZP42K6ETFE	1	4.8	33	2.6	0.75	7.4	8.6	13.4	15	6.0	10.8	15	3.3	5.9	15
LV070	1	208-230/1/60	197/253	ZP54K6EPFV	1	24.7	166	5.5	0.75	30.2	36.4	61.1	60	30.9	55.6	50	6.9	12.4	15
	3	208-230/3/60	197/253	ZP54K5ETF5 / ZP54K6ETF5	1	15.6	110	5.5	0.75	21.1	25.0	40.6	40	19.5	35.1	35	6.9	12.4	15
	4	460/3/60	414/506	ZP54K5ETFD / ZP54K6ETFD	1	7.8	52	2.8	0.75	10.6	12.6	20.4	20	9.8	17.6	15	3.5	6.3	15
LV070	5	575/3/60	517/633	ZP54K5ETFE / ZP54K6ETFE	1	5.8	38.9	2.6	0.75	8.4	9.9	15.7	15	7.3	13.1	15	3.3	5.9	15
	1	208-230/1/60	197/253	ZP57K5EPFV	1	28.3	178.0	5.5	0.75	33.8	40.9	69.2	60	35.4	63.7	60	6.9	12.4	15
	3	208-230/3/60	197/253	ZP57K5ETF5	1	19.2	136.0	5.5	0.75	24.7	29.5	48.7	45	24.0	43.2	40	6.9	12.4	15
	4	460/3/60	414/506	ZP57K5ETFD	1	8.7	66.1	2.8	0.75	11.5	13.7	22.375	20	10.9	19.6	15	3.5	6.3	15
5	575/3/60	517/633	ZP57K5ETFE	1	6.9	55.3	2.6	0.75	9.5	11.2	18.125	15	8.6	15.5	15	3.3	5.9	15	

* OLR = additional overload relay/ lower RLA

LV Model Series - Commercial Water Source Heat Pumps



Electrical Data - ECM X13 Constant Torque Blower Motor

Model	Voltage Code	Voltage/Hz/Phase	Voltage Min/Max	Compressor				Blower Motor			Single Point Power			Dual Point Power					
				Compressor model	Qty	RLA	LRA	FLA	HP	Total Unit FLA	Min. Circuit Amps	MOP CALC	MOP	Compressor Circuit			Blower Motor Circuit		
														Min. Circuit Amps	MOP CALC	MOP	Min. Circuit Amps	MOP CALC	MOP
LV015	1	208-230/1/60	197/253	RGA5512BXD	1	5.6	29	2.8	0.33	8.4	9.8	15.4	15	7.0	12.6	15	3.5	6.3	15
	2	265/1/60	238/292	RGA5512BXV	1	4.6	20	2.6	0.33	7.2	8.4	13.0	15	5.8	10.4	15	3.3	5.9	15
LV018	1	208-230/1/60	197/253	GK151KAAA3	1	7.4	33	2.8	0.33	10.2	12.1	19.5	15	9.3	16.7	15	3.5	6.3	15
	2	265/1/60	238/292	GK151QAAA3	1	6.0	28	2.6	0.33	8.6	10.1	16.1	15	7.5	13.5	15	3.3	5.9	15
LV024	1	208-230/1/60	197/253	ZP20K5EPFV	1	13.5	58.3	2.8	0.33	16.3	19.7	33.2	30	16.9	30.4	30	3.5	6.3	15
	2	265/1/60	238/292	ZP20K5EPFJ	1	9.0	54	2.6	0.33	11.6	13.9	22.9	20	11.3	20.3	20	3.3	5.9	15
	3	208-230/3/60	197/253	ZP20K5ETF5	1	7.1	55.4	2.8	0.33	9.9	11.7	18.8	15	8.9	16.0	15	3.5	6.3	15
	4	460/3/60	414/506	ZP20K5ETFD	1	3.5	28	2.1	0.50	5.6	6.5	10.0	15	4.4	7.9	15	2.6	4.7	15
LV030	1	208-230/1/60	197/253	ZP24K5EPFV	1	12.8	64	2.8	0.33	15.6	18.8	31.6	30	16.0	28.8	25	3.5	6.3	15
	2	265/1/60	238/292	ZP24K5EPFJ	1	10.9	60	2.6	0.33	13.5	16.2	27.1	25	13.6	24.5	20	3.3	5.9	15
	3	208-230/3/60	197/253	ZP24K5ETF5	1	8.3	58	2.8	0.33	11.1	13.2	21.5	20	10.4	18.7	15	3.5	6.3	15
	4	460/3/60	414/506	ZP24K5ETFD	1	5.1	28	2.1	0.50	7.2	8.5	13.6	15	6.4	11.5	15	2.6	4.7	15
LV036	1	208-230/1/60	197/253	ZP31K6EPFV	1	15.4	83.9	4.1	0.5	19.5	23.4	38.8	35	19.3	34.7	30	5.1	9.2	15
	2	265/1/60	238/292	ZP31K5EPFJ + OLR*	1	11.6	72	3.6	0.5	15.2	18.1	29.7	25	14.5	26.1	25	4.5	8.1	15
	3	208-230/3/60	197/253	ZP31K5ETF5 / ZP31K6ETF5	1	10.4	73	4.1	0.5	14.5	17.1	27.5	25	13.0	23.4	20	5.1	9.2	15
	4	460/3/60	414/506	ZP31K5ETFD / ZP31K6ETFD	1	5.8	38	2.1	0.5	7.9	9.4	15.2	15	7.3	13.1	15	2.6	4.7	15
LV041	1	208-230/1/60	197/253	ZP31K6EPFV	1	15.4	83.9	6.0	0.75	21.4	25.3	40.7	40	19.3	34.7	30	7.5	13.5	15
	3	208-230/3/60	197/253	ZP31K6ETF5	1	10.4	73	6.0	0.75	16.4	19.0	29.4	25	13.0	23.4	20	7.5	13.5	15
	4	460/3/60	414/506	ZP31K6ETFD	1	5.8	38	3.2	0.75	9.0	10.5	16.3	15	7.3	13.1	15	4.0	7.2	15
LV042	1	208-230/1/60	197/253	ZP34K6EPFV	1	16.7	109	6.0	0.75	22.7	26.9	43.6	40	20.9	37.6	35	7.5	13.5	15
	3	208-230/3/60	197/253	ZP34K6ETF5	1	11.2	84	6.0	0.75	17.2	20.0	31.2	30	14.0	25.2	25	7.5	13.5	15
	4	460/3/60	414/506	ZP34K6ETFD	1	5.6	44	3.2	0.75	8.8	10.2	15.8	15	7.0	12.6	15	4.0	7.2	15
LV048	1	208-230/1/60	197/253	ZP42K6EPFV	1	19.6	130	6.0	0.75	25.6	30.5	50.1	50	24.5	44.1	40	7.5	13.5	15
	3	208-230/3/60	197/253	ZP42K6ETF5	1	13.7	83.1	6.0	0.75	19.7	23.1	36.8	35	17.1	30.8	30	7.5	13.5	15
	4	460/3/60	414/506	ZP42K6ETFD	1	6.2	41	3.2	0.75	9.4	11.0	17.2	15	7.8	14.0	15	4.0	7.2	15
LV060	1	208-230/1/60	197/253	ZP54K6EPFV	1	24.7	166	7.6	1.00	32.3	38.5	63.2	60	30.9	55.6	50	9.5	17.1	15
	3	208-230/3/60	197/253	ZP54K5ETF5 / ZP54K6ETF5	1	15.6	110	7.6	1.00	23.2	27.1	42.7	40	19.5	35.1	35	9.5	17.1	15
	4	460/3/60	414/506	ZP54K5ETFD / ZP54K6ETFD	1	7.8	52	4.0	1.00	11.8	13.8	21.6	20	9.8	17.6	15	5.0	9.0	15
LV070	1	208-230/1/60	197/253	ZP57K5EPFV	1	28.3	178	7.6	1.00	35.9	43.0	71.3	70	35.4	63.7	60	9.5	17.1	15
	3	208-230/3/60	197/253	ZP57K5ETF5	1	19.2	136	7.6	1.00	26.8	31.6	50.8	50	24.0	43.2	40	9.5	17.1	15
	4	460/3/60	414/506	ZP57K5ETFD	1	8.7	66	4.0	1.00	12.7	14.9	23.6	20	10.9	19.6	15	5.0	9.0	15

*OLR = additional overload relay/ lower RLA

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Electrical Data - ECM EON Constant CFM Blower Motor

Model	Voltage Code	Voltage/Hz/Phase	Voltage Min/Max	Compressor				Blower Motor				Single Point Power				Dual Point Power					
				Compressor model	Qty	RLA	LRA	FLA	HP	Total Unit FLA	Min. Circuit Amps	MOP CALC	MOP	Compressor Circuit			Blower Motor Circuit				
														Min. Circuit Amps	MOP CALC	MOP	Min. Circuit Amps	MOP CALC	MOP		
LV015	1	208-230/1/60	197/253	RGAA5512BXD	1	5.6	29	2.8	0.33	8.4	9.8	15.4	15	7.0	12.6	15	3.5	6.3	15		
	2	265/1/60	238/292	RGAA5512BXV	1	4.6	20	2.6	0.33	7.2	8.4	13.0	15	5.8	10.4	15	3.3	5.9	15		
LV018	1	208-230/1/60	197/253	GK151KAAA3	1	7.4	33	2.8	0.33	10.2	12.1	19.5	15	9.3	16.7	15	3.5	6.3	15		
	2	265/1/60	238/292	GK151QAAA3	1	6.0	28	2.6	0.33	8.6	10.1	16.1	15	7.5	13.5	15	3.3	5.9	15		
LV024	1	208-230/1/60	197/253	ZP20K5EPFV	1	13.5	58.3	2.8	0.33	16.3	19.7	33.2	30	16.9	30.4	30	3.5	6.3	15		
	2	265/1/60	238/292	ZP20K5EPFJ	1	9.0	54	2.6	0.33	11.6	13.9	22.9	20	11.3	20.3	20	3.3	5.9	15		
	3	208-230/3/60	197/253	ZP20K5ETF5	1	7.1	55.4	2.8	0.33	9.9	11.7	18.8	15	8.9	16.0	15	3.5	6.3	15		
	4	460/3/60	414/506	ZP20K5ETFD	1	3.5	28	2.6	0.33	6.1	7.0	10.5	15	4.4	7.9	15	3.3	5.9	15		
LV030	1	208-230/1/60	197/253	ZP24K5EPFV	1	12.8	64	2.8	0.33	15.6	18.8	31.6	30	16.0	28.8	25	3.5	6.3	15		
	2	265/1/60	238/292	ZP24K5EPFJ	1	10.9	60	2.6	0.33	13.5	16.2	27.1	25	13.6	24.5	20	3.3	5.9	15		
	3	208-230/3/60	197/253	ZP24K5ETF5	1	8.3	58	2.8	0.33	11.1	13.2	21.5	20	10.4	18.7	15	3.5	6.3	15		
	4	460/3/60	414/506	ZP24K5ETFD	1	5.1	28	2.6	0.33	7.7	9.0	14.1	15	6.4	11.5	15	3.3	5.9	15		
LV036	1	208-230/1/60	197/253	ZP31K6EPFV	1	15.4	83.9	4.3	0.50	19.7	23.6	39.0	35	19.3	34.7	30	5.4	9.7	15		
	2	265/1/60	238/292	ZP31K5EPFJ + OLR*	1	11.6	72	4.1	0.50	15.7	18.6	30.2	30	14.5	26.1	25	5.1	9.2	15		
	3	208-230/3/60	197/253	ZP31K5ETF5 / ZP31K6ETF5	1	10.4	73	4.3	0.50	14.7	17.3	27.7	25	13.0	23.4	20	5.4	9.7	15		
	4	460/3/60	414/506	ZP31K5ETFD / ZP31K6ETFD	1	5.8	38	4.1	0.50	9.9	11.4	17.2	15	7.3	13.1	15	5.1	9.2	15		
LV041	1	208-230/1/60	197/253	ZP31K6EPFV	1	15.4	83.9	6.8	0.75	22.2	26.1	41.5	40	19.3	34.7	30	8.5	15.3	15		
	3	208-230/3/60	197/253	ZP31K6ETF5	1	10.4	73	6.8	0.75	17.2	19.8	30.2	30	13.0	23.4	20	8.5	15.3	15		
	4	460/3/60	414/506	ZP31K6ETFD	1	5.8	38	5.5	0.75	11.3	12.8	18.6	15	7.3	13.1	15	6.9	12.4	15		
LV042	1	208-230/1/60	197/253	ZP34K6EPFV	1	16.7	109	6.8	0.75	23.5	27.7	44.4	40	20.9	37.6	35	8.5	15.3	15		
	3	208-230/3/60	197/253	ZP34K6ETF5	1	11.2	84	6.8	0.75	18.0	20.8	32.0	30	14.0	25.2	25	8.5	15.3	15		
	4	460/3/60	414/506	ZP34K6ETFD	1	5.6	44	5.5	0.75	11.1	12.5	18.1	15	7.0	12.6	15	6.9	12.4	15		
LV048	1	208-230/1/60	197/253	ZP42K6EPFV	1	19.6	130	6.8	0.75	26.4	31.3	50.9	50	24.5	44.1	40	8.5	15.3	15		
	3	208-230/3/60	197/253	ZP42K6ETF5	1	13.7	83.1	6.8	0.75	20.5	23.9	37.6	35	17.1	30.8	30	8.5	15.3	15		
	4	460/3/60	414/506	ZP42K6ETFD	1	6.2	41	5.5	0.75	11.7	13.3	19.5	15	7.8	14.0	15	6.9	12.4	15		
LV060	1	208-230/1/60	197/253	ZP54K6EPFV	1	24.7	166	9.1	1.00	33.8	40.0	64.7	60	30.9	55.6	50	11.4	20.5	20		
	3	208-230/3/60	197/253	ZP54K5ETF5 / ZP54K6ETF5	1	15.6	110	9.1	1.00	24.7	28.6	44.2	40	19.5	35.1	35	11.4	20.5	20		
	4	460/3/60	414/506	ZP54K5ETFD / ZP54K6ETFD	1	7.8	52	6.9	1.00	14.7	16.7	24.5	20	9.8	17.6	15	8.6	15.5	15		
LV070	1	208-230/1/60	197/253	ZP57K5EPFV	1	28.3	178	9.1	1.00	37.4	44.5	72.8	70	35.4	63.7	60	11.4	20.5	20		
	3	208-230/3/60	197/253	ZP57K5ETF5	1	19.2	136	9.1	1.00	28.3	33.1	52.3	50	24.0	43.2	40	11.4	20.5	20		
	4	460/3/60	414/506	ZP57K5ETFD	1	8.7	66	6.9	1.00	15.6	17.8	26.5	25	10.9	19.6	15	8.6	15.5	15		

*OLR = additional overload relay/ lower RLA

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Blower Performance CFM (PSC Standard Motor Blower)														
Model	Motor Speed	Rated Airflow	Available External Static Pressure (in. wc. Wet coil and filter included)											
			0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	1.10	1.20
LV007	Low		370	340	295	250	-	-	-	-	-	-	-	-
	Med	X	390	360	330	300	260	-	-	-	-	-	-	-
	Hi		410	380	350	315	280	210	-	-	-	-	-	-
LV009	Low		295	270	245	220	-	-	-	-	-	-	-	-
	Med		315	290	265	235	205	-	-	-	-	-	-	-
	Hi	X	330	300	275	245	220	180	-	-	-	-	-	-
LV012	Low		300	290	290	300	-	-	-	-	-	-	-	-
	Med		380	380	360	330	290	-	-	-	-	-	-	-
	Hi	X	420	400	380	360	340	320	-	-	-	-	-	-
LV015	Low		500	450	400	-	-	-	-	-	-	-	-	-
	Med		560	520	480	430	400	-	-	-	-	-	-	-
	Hi	X	700	650	600	550	500	450	400	-	-	-	-	-
LV018	Low		630	590	560	-	-	-	-	-	-	-	-	-
	Med	X	810	790	760	730	680	590	-	-	-	-	-	-
	Hi		1010	970	920	870	800	680	530	-	-	-	-	-
LV024	Low		740	730	700	660	610	-	-	-	-	-	-	-
	Med		830	810	770	730	680	620	-	-	-	-	-	-
	Hi	X	1000	950	900	830	750	690	630	-	-	-	-	-
LV030	Low		740	730	700	660	610	-	-	-	-	-	-	-
	Med		830	810	770	730	680	620	-	-	-	-	-	-
	Hi	X	1000	950	900	830	750	690	630	-	-	-	-	-
LV036	Low		1290	1250	1200	1150	1080	1000	-	-	-	-	-	-
	Med		1410	1350	1290	1220	1150	1060	900	-	-	-	-	-
	Hi	X	1500	1440	1370	1290	1210	1120	1000	900	-	-	-	-
LV041	Low		950	900	840	780	720	700	-	-	-	-	-	-
	Med		1200	1140	1080	1010	930	870	820	-	-	-	-	-
	Hi	X	1490	1400	1320	1240	1160	1080	990	910	-	-	-	-
LV042	Low		1210	1210	1190	1160	1120	1080	-	-	-	-	-	-
	Med		1460	1450	1430	1390	1330	1250	1160	-	-	-	-	-
	Hi	X	1750	1710	1670	1620	1560	1460	1330	1210	1080	-	-	-
LV048 208/230V	Low		1450	1440	1420	1400	1360	1320	-	-	-	-	-	-
	Med		1700	1670	1630	1580	1530	1470	1400	-	-	-	-	-
	Hi	X	1930	1870	1810	1740	1670	1600	1520	1430	1340	-	-	-
LV048 460V	Low		1886	1853	1818	1773	1724	1654	1562	1481	1386	1299	883	-
	Med		2029	1993	1946	1897	1837	1763	1662	1564	1460	1360	1254	-
	Hi	X	2225	2170	2105	2032	1961	1885	1793	1666	1541	1435	1298	-
LV060	Low		1560	1550	1540	1530	1505	1475	1440	1400	-	-	-	-
	Med		1890	1880	1870	1860	1825	1790	1730	1670	1590	1500	-	-
	Hi	X	2220	2200	2150	2100	2050	2000	1940	1870	1800	1700	1590	-
LV070	Low		1570	1560	1550	1540	1530	1505	1475	1440	1400	-	-	-
	Med		1900	1890	1880	1870	1860	1825	1790	1730	1670	1590	1500	-
	Hi	X	2240	2220	2200	2150	2100	2050	2000	1940	1870	1800	1700	1590

Note: 575V models employ 1 speed motors (high only)

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Blower Performance CFM (ECM Constant Torque)														
Model	Tap #	Default factory motor setting	Available External Static Pressure (in. wc. Wet coil and filter included)											
			0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	1.10	1.20
LV015	1		480	440	410	370	340	-	-	-	-	-	-	-
	2		530	490	450	420	380	340	-	-	-	-	-	-
	3	X	600	560	510	470	440	410	370	-	-	-	-	-
	4		650	600	560	520	500	480	440	380	-	-	-	-
	5		710	660	620	580	550	520	490	470	-	-	-	-
LV018	1		630	590	560	530	490	-	-	-	-	-	-	-
	2	X	720	700	670	630	600	560	-	-	-	-	-	-
	3		790	770	750	710	670	620	560	-	-	-	-	-
	4		910	890	850	810	740	670	590	520	-	-	-	-
	5		1010	970	920	860	810	750	660	530	-	-	-	-
LV024	1		620	600	570	540	490	-	-	-	-	-	-	-
	2		730	710	670	640	610	550	-	-	-	-	-	-
	3		820	790	760	740	710	670	630	-	-	-	-	-
	4	X	940	910	880	850	800	740	660	-	-	-	-	-
	5		1070	1010	950	900	840	760	670	-	-	-	-	-
LV030	1		620	600	570	540	490	-	-	-	-	-	-	-
	2		730	710	670	640	610	550	-	-	-	-	-	-
	3		820	790	760	740	710	670	630	-	-	-	-	-
	4		940	910	880	850	800	740	660	-	-	-	-	-
	5	X	1070	1010	950	900	840	760	670	-	-	-	-	-
LV036	1		1120	1090	1055	1030	1000	-	-	-	-	-	-	-
	2		1260	1230	1200	1170	1140	1080	-	-	-	-	-	-
	3	X	1330	1290	1250	1210	1170	1100	1030	-	-	-	-	-
	4		1400	1360	1310	1250	1190	1120	1040	960	-	-	-	-
	5		1470	1420	1360	1290	1220	1140	1050	970	890	-	-	-
LV041	1		840	770	700	620	-	-	-	-	-	-	-	-
	2		1220	1150	1080	1010	950	-	-	-	-	-	-	-
	3		1430	1360	1280	1200	1130	1080	-	-	-	-	-	-
	4	X	1540	1460	1380	1300	1220	1140	1060	-	-	-	-	-
	5		1620	1550	1470	1370	1260	1180	1090	1000	-	-	-	-
LV042	1		1270	1250	1230	1210	-	-	-	-	-	-	-	-
	2	X	1440	1420	1410	1410	1400	1380	1340	-	-	-	-	-
	3		1540	1530	1510	1500	1490	1470	1430	1350	-	-	-	-
	4		1650	1630	1610	1600	1580	1530	1460	1360	1240	-	-	-
	5		1730	1720	1700	1670	1620	1570	1490	1380	1260	1100	-	-
LV048	1		1390	1370	1350	1320	-	-	-	-	-	-	-	-
	2		1600	1580	1550	1530	1510	-	-	-	-	-	-	-
	3	X	1730	1700	1670	1650	1630	1600	1580	1540	-	-	-	-
	4		1830	1810	1780	1760	1740	1710	1670	1600	1520	-	-	-
	5		1930	1910	1880	1860	1830	1780	1720	1640	1540	1420	-	-
LV060	1		1900	1880	1860	1820	-	-	-	-	-	-	-	-
	2		2000	1970	1950	1920	1890	1860	-	-	-	-	-	-
	3	X	2110	2090	2060	2030	2010	1970	1940	1910	1880	-	-	-
	4		2220	2200	2170	2140	2110	2080	2050	2060	2050	2000	1920	-
	5		2340	2320	2290	2260	2230	2210	2180	2150	2110	2070	2000	1930
LV070	1		2050	2010	1970	1930	-	-	-	-	-	-	-	-
	2		2150	2120	2080	2030	1990	1960	-	-	-	-	-	-
	3	X	2270	2230	2200	2160	2120	2080	2040	2010	1980	-	-	-
	4		2390	2350	2320	2280	2250	2200	2160	2130	2100	2070	2030	-
	5		2520	2480	2450	2420	2380	2330	2290	2260	2220	2170	2100	2020

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Blower Performance CFM (ECM Constant Airflow)														
Model	Fan Speed	Default factory motor setting	Available External Static Pressure (in. wc. Wet coil and filter included)											
			0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	1.10	1.20
LV015	A - Low		450	450	450	450	450	450	450	440	440	430	-	-
	A - Normal	X	500	500	500	500	500	500	500	480	470	460	-	-
	A - Hi		580	580	580	580	580	580	580	570	560	550	-	-
LV018	B - Low		550	540	540	540	540	540	540	530	520	500	-	-
	B - Normal	X	650	650	650	650	650	650	640	630	610	590	-	-
	B - Hi		750	750	750	750	750	750	740	730	710	690	-	-
LV024	C - Low		720	720	720	720	720	720	720	700	650	560	-	-
	C - Normal	X	850	850	850	850	850	850	850	850	800	700	-	-
	C - Hi		960	960	960	960	960	960	960	960	880	790	-	-
LV030	D - Low		810	810	810	810	810	810	810	770	720	650	-	-
	D - Normal	X	950	950	950	950	950	950	950	900	850	780	-	-
	D - Hi		980	980	980	980	980	980	980	950	900	820	-	-
LV036	A - Low		1020	1020	1020	1020	1020	1020	1000	990	960	930	-	-
	A - Normal	X	1200	1200	1200	1200	1200	1200	1180	1160	1130	1090	-	-
	A - Hi		1380	1380	1380	1380	1380	1380	1360	1330	1300	1250	-	-
LV041	A - Low		1100	1100	1100	1100	1100	1090	1070	1050	1020	990	-	-
	A - Normal	X	1280	1280	1280	1280	1280	1260	1240	1220	1180	1140	-	-
	A - Hi		1300	1300	1300	1300	1300	1280	1260	1240	1200	1160	-	-
LV042	B - Low		1190	1190	1190	1190	1190	1190	1190	1190	1190	1190	1190	-
	B - Normal	X	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	-
	B - Hi		1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	1630	-
LV048	A - Low		1340	1340	1340	1340	1340	1340	1340	1340	1340	1340	1340	-
	A - Normal	X	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	-
	A - Hi		1810	1810	1810	1810	1810	1810	1810	1810	1810	1810	1810	-
LV060	A - Low		1700	1700	1700	1700	1700	1700	1700	1700	1700	1690	1690	1680
	A - Normal	X	2000	2000	2000	2000	2000	2000	2000	2000	2000	1980	1980	1980
	A - Hi		2220	2220	2220	2220	2220	2220	2220	2220	2220	2130	2100	2070
LV070	B - Low		1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
	B - Normal	X	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
	B - Hi		2330	2330	2330	2330	2330	2330	2330	2330	2330	2330	2330	2330



Air flow is 70% of tabulated values during fan only operation. Air flow is 85% of tabulated value during passive dehumidification mode when enabled.

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Physical Data										
Description	LV007		LV009		LV012		LV015		LV018	
	Cu	CuNi	Cu	CuNi	Cu	CuNi	Cu	CuNi	Cu	CuNi
Compressor Type (Qty 1)	Rotary		Rotary		Rotary		Rotary		Rotary	
Max Water Working Pressure (PSIG/kPa)	400		400		400		400		400	
PSC Fan Motor & Blower										
Fan Motor Type/Speeds	PSC/3		PSC/3		PSC/3		PSC/3		PSC/3	
Fan Motor	0.1		0.1		0.1		1/6		0.25	
Blower Wheel Size	4.5 x 4.5		4.5 x 4.5		5.5 x 4.5		9 x 7		9x7	
ECM Fan Motor & Blower										
Fan Motor Type/Speeds							X13 / EON		X13 / EON	
Fan Motor (HP)	N/A		N/A		N/A		0.33		0.33	
Blower Wheel Size (Dia. x W)							9x7		9x7	
Water Connection Size										
FPT	0.75		0.75		0.75		0.75		0.75	
Coaxial Coil Volume	0.06		0.08		0.08		0.09		0.14	
Vertical Cabinet										
Refrigeration Charge (oz)	16		19		19	25	19	17	23	25
Air Coil Dimensions (H x W)	10x14		10x14		10x14		12x16.5		16x16.5	
Standard Filter - 1" Throwaway (L x H)	10x16		10x16		10x16		16x20		16x20	
Optional Filter - 2" MERV 8 or 13 Throwaway (L x H)	10x16		10x16		10x16		16x20		16x20	
Weight - Operating (lbs)	98		105		105		123		173	
Weight - Shipping (lbs)	126		132		132		151		201	
Horizontal Cabinet										
Refrigeration Charge (oz)	16	19	19		19	25	19	22	24	25
Air Coil Dimensions (H x W)	10x14		10x14		10x14		12x16.5		16x16.5	
Standard Filter - 1" Throwaway (L x H)	10x16		10x16		10x16		16x20		16x20	
Optional Filter - 2" MERV 8 or 13 Throwaway (L x H)	10x16		10x16		10x16		16x20		16x20	
Weight - Operating (lbs)	96		105		105		136		174	
Weight - Shipping (lbs)	128		134		134		158		208	

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Physical Data								
Description	LV024		LV030		LV036		LV041	
	Cu	CuNi	Cu	CuNi	Cu	CuNi	Cu	CuNi
Compressor Type (Qty 1)	Scroll		Scroll		Scroll		Scroll	
Max Water Working Pressure (PSIG/kPa)	400		400		400		400	
PSC Fan Motor & Blower								
Fan Motor Type/Speeds	PSC/3		PSC/3		PSC/3		PSC/3	
Fan Motor	0.25		0.25		0.5		0.75	
Blower Wheel Size	9x7		9x7		9x7		10x8	
ECM Fan Motor & Blower								
Fan Motor Type/Speeds	X13 / EON		X13 / EON		X13 / EON		X13 / EON	
Fan Motor (HP)	0.33		0.33		0.50		0.75	
Blower Wheel Size (Dia. x W)	9x7		9x7		9x7		10x8	
Water Connection Size								
FPT	0.75		0.75		0.75		0.75	
Coaxial Coil Volume	0.24		0.24		0.27		0.27	
Vertical Cabinet								
Refrigeration Charge (oz)	35	33	35	33	44	40	41	
Air Coil Dimensions (H x W)	20x16.5		20x16.5		24x20.2		20x16	
Standard Filter - 1" Throwaway (L x H)	20x20		20x20		24x24		20x20	
Optional Filter - 2" MERV 8 or 13 Throwaway (L x H)	20x20		20x20		24x24		20x20	
Weight - Operating (lbs)	177		190		229		217	
Weight - Shipping (lbs)	205		217		255		243	
Horizontal Cabinet								
Refrigeration Charge (oz)	35	33	35	33	40		N/A	
Air Coil Dimensions (H x W)	16x20.5		16x20.5		18x27.5			
Standard Filter - 1" Throwaway (L x H)	16x25		16x25		18x30			
Optional Filter - 2" MERV 8 or 13 Throwaway (L x H)	16x25		16x25		18x30			
Weight - Operating (lbs)	181		190		226			
Weight - Shipping (lbs)	212		224		270			

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



BOSCH

Physical Data								
Description	LV042		LV048		LV060		LV070	
	Cu	CuNi	Cu	CuNi	Cu	CuNi	Cu	CuNi
Compressor Type (Qty 1)	Scroll		Scroll		Scroll		Scroll	
Max Water Working Pressure (PSIG/kPa)	400		400		400		400	
PSC Fan Motor & Blower								
Fan Motor Type/Speeds	PSC/3		PSC/3		PSC/3		PSC/3	
Fan Motor	0.5		0.75		0.75		0.75	
Blower Wheel Size	10x8		10x8		10x9		11x9	
ECM Fan Motor & Blower								
Fan Motor Type/Speeds	X13 / EON		X13 / EON		X13 / EON		X13 / EON	
Fan Motor (HP)	0.75		0.75		1.00		1.00	
Blower Wheel Size (Dia. x W)	10x8		10x8		11x9		11x9	
Water Connection Size								
FPT	0.75		1		1		1	
Coaxial Coil Volume	0.27		0.49		0.62		0.62	
Vertical Cabinet								
Refrigeration Charge (oz)	47		52		59		64	
Air Coil Dimensions (H x W)	24x20.2		24x26.75		24x26.75		32x26.2	
Standard Filter - 1" Throwaway (L x H)	24x24		24x30		24x30		16x30 (2)	
Optional Filter - 2" MERV 8 or 13 Throwaway (L x H)	24x24		24x30		24x30		16x30 (2)	
Weight - Operating (lbs)	239		287		307		336	
Weight - Shipping (lbs)	265		312		331		360	
Horizontal Cabinet								
Refrigeration Charge (oz)	43	42	51		62		61	
Air Coil Dimensions (H x W)	18x27.5		20x32		20x32		20x42	
Standard Filter - 1" Throwaway (L x H)	18x30		20x34.5		20x34.5		20x24 (2)	
Optional Filter - 2" MERV 8 or 13 Throwaway (L x H)	18x30		20x34.5		20x34.5		20x24 (2)	
Weight - Operating (lbs)	231		274		288		316	
Weight - Shipping (lbs)	264		299		318		365	

Bosch Thermotechnology Corp.
Londonderry, NH • Watertown, MA • Ft. Lauderdale, FL

LV Model Series - Commercial Water Source Heat Pumps



Horizontal Cabinet Corner Weights										
Configuration			Left Hand Evaporator				Right Hand Evaporator			
Model	Unit	Total	Left Front*	Right Front*	Left Back	Right Back	Left Front*	Right Front*	Left Back	Right Back
LV007	Lbs	98.4	28.0	21.5	25.3	23.7	21.5	28.0	23.7	25.3
	kg	44.6	12.7	9.7	11.5	10.7	9.7	12.7	10.7	11.5
LV009	Lbs	103.0	28.9	23.6	26.4	25.8	23.6	28.9	25.8	26.4
	kg	46.7	13.1	10.7	12.0	11.7	10.7	13.1	11.7	12.0
LV012	Lbs	104.8	28.9	23.6	26.4	25.8	23.6	28.9	25.8	26.4
	kg	47.5	13.1	10.7	12.0	11.7	10.7	13.1	11.7	12.0
LV015	Lbs	126.9	35.8	28.3	33.6	29.1	28.3	35.8	29.1	33.6
	kg	57.5	16.2	12.8	15.3	13.2	12.8	16.2	13.2	15.3
LV018	Lbs	177.4	56.9	35.9	47.5	37.1	35.9	56.9	37.1	47.5
	kg	80.5	25.8	16.3	21.5	16.8	16.3	25.8	16.8	21.5
LV024	Lbs	181.0	57.8	36.8	48.4	38.0	36.8	57.8	38.0	48.4
	kg	82.1	26.2	16.7	22.0	17.2	16.7	26.2	17.2	22.0
LV030	Lbs	194.3	61.1	40.5	51.8	40.9	40.5	61.1	40.9	51.8
	kg	88.1	27.7	18.4	23.5	18.6	18.4	27.7	18.6	23.5
LV036	Lbs	237.0	70.5	48.6	65.9	52.0	48.6	70.5	52.0	65.9
	kg	107.5	32.0	22.1	29.9	23.6	22.1	32.0	23.6	29.9
LV042	Lbs	231.0	69.6	46.7	64.5	50.2	46.7	69.6	50.2	64.5
	kg	104.8	31.6	21.2	29.2	22.8	21.2	31.6	22.8	29.2
LV048	Lbs	268.0	86.7	59.6	61.6	60.0	59.6	86.7	60.0	61.6
	kg	121.6	39.3	27.0	28.0	27.2	27.0	39.3	27.2	28.0
LV060	Lbs	288.0	87.7	64.7	69.4	66.2	64.7	87.7	66.2	69.4
	kg	130.6	39.8	29.4	31.5	30.0	29.4	39.8	30.0	31.5
LV072	Lbs	316.0	97.6	71.5	76.5	70.4	71.5	97.6	70.4	76.5
	kg	143.3	44.3	32.4	34.7	32.0	32.4	44.3	32.0	34.7

*Front is control box end