

## Specification Guide

# M Series

## Manufactured Housing Evaporator Coils

### Features

- High efficiency lanced fin design.
- "No-hassle" 5-year warranty.
- R-22, R-410A, AC & Heat Pump compatible.
- All coils have durable packaging with bar coded labels on the box.
- Threaded expansion valves available factory installed or as a field installed kit.
- Coils are air pressure tested at 500 psi, leak tested with helium, sealed with rubber plugs, then charged with dry air.
- Downflow drip shields are molded into drain pan.
- Filter-friendly top plate on most models (except 22" & above).
- Down-turned headers are sized out to easily receive line set.
- Factory software for TXV failure testing.
- Includes die-cut foam sheet for sealing, drain ELL, drain hose & clamp.
- Dedicated upflow/downflow.
- Copper refrigerant connections for easy brazing.
- Rifled copper tubing.



### Available Options

- Field or factory installed threaded expansion valve.


Slab Number	Nominal Tonnage	Pan Width	Pan Depth	Coil Height	Weight	Pallet Qty
E22	1.5 - 3	18"	19 1/2"	15"	23	8
E23	1.5 - 3	18"	19 1/2"	17"	26	8
E24	1.5 - 3.5	18"	19 1/2"	19"	27	8
E25	1.5 - 4	18"	19 1/2"	21"	32	4
E30	1.5 - 2	18"	19 1/2"	11"	22	8
E31	1.5 - 2.5	18"	19 1/2"	13"	24	8
E32	1.5 - 3	18"	19 1/2"	15"	28	8
E33	1.5 - 3	18"	19 1/2"	17"	32	8
E34	3 - 5	18"	19 1/2"	19"	35	8
E35	3 - 5	18"	19 1/2"	21"	39	4
E36	3 - 5	18"	19 1/2"	23"	41	4
E37	3 - 5	18"	19 1/2"	25"	45	4
E48	3.5 - 5	18"	19 1/2"	27"	44	4
E49	3.5 - 5	18"	19 1/2"	25"	46	4
E50	3.5 - 5	18"	19 1/2"	27"	50	4
E51	3.5 - 5	18"	19 1/2"	29"	53	4
E52	4 - 5	18"	19 1/2"	31"	55	4
E54	3.5 - 5	18"	19 1/2"	29"	50	4
E55	3.5 - 5	18"	19 1/2"	31"	50	4
E58	2 - 3	18"	19 1/2"	17"	42	8
E59	3 - 5	18"	19 1/2"	19"	45	8
E66	3 - 5	18"	19 1/2"	21"	48	4
E67	4 - 5	18"	19 1/2"	23"	49	4

Product improvement is a continuous process at Advanced Distributor Products. Therefore, product specifications are subject to change without notice and without obligation on our part. Please contact your ADP representative or distributor to verify details.

© by Advanced Distributor Products. All rights reserved.



# Product Nomenclature

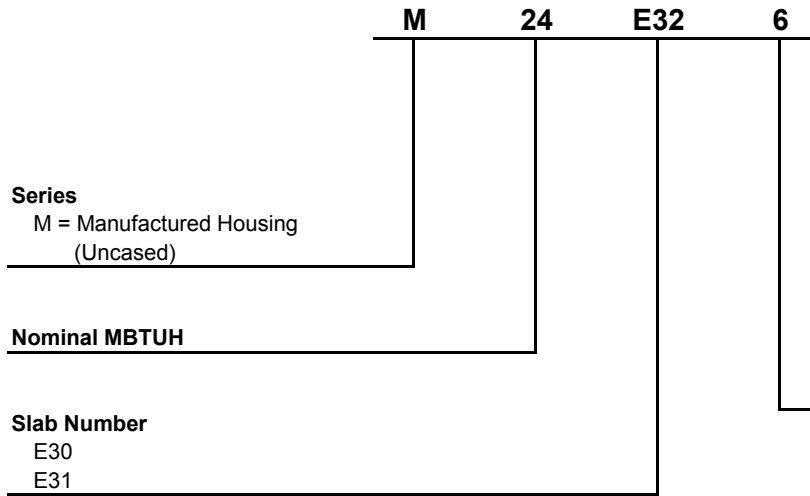

### Metering Device

- 1 = Piston (R-410A)\*
  - 2 = Piston (R-22)
  - 6 = Non-Bleed A/C TXV (R-410A)
  - 7 = Bleed HP-A/C TXV (R-410A)\*\*
  - 8 = Bleed A/C TXV (R-410A)\*\*
  - 9 = Non-Bleed H/P TXV (R-410A)
- \*\* 7 and 8 valve options available only for York family products.*

\* Piston will always be sized to match the nominal BTU rating of the coil

Installed Piston Sizes		
MBTUH	R-410A	R-22
12	41	41
18	49	53
24	53	59
30	59	67
36	67	73
42	73	80
48	76	84
60	93	93

