



GE APPLIANCES
a Haier company

Product Specifications

NF80XS
**80% Single Stage Constant Torque
Ultra Low NOx Gas Furnace**



**READ CAREFULLY.
KEEP THESE INSTRUCTIONS.**

NF80XS

PRODUCT SPECIFICATIONS

CONFIGURATIONS

- Upflow / Horizontal ONLY

HEAT EXCHANGER DESIGN

- Aluminized steel tubular heat exchanger

BURNER

- Low Emission pre-mix Burner

CABINET DESIGN

- Compact 33" height
- Standardized widths for easy coil fit

AIR DELIVERY SYSTEM

- Multi-speed high efficiency (constant torque) blower motor
- Easily removable slide out blower design
- Enhanced cooling SEER ratings when applied with properly matched cooling equipment

DESCRIPTION

The NF80X model is an 80% AFUE gas furnace used for upflow or horizontal applications only, manufactured with aluminized steel tubular heat exchangers. NF80X units are available in heating inputs of 40,000 to 100,000 Btuh and cooling applications up to 5 tons. Units are approved for installations up to 7500 feet above sea level and factory equipped for use with natural gas only. The NF80X is a single-stage gas furnace. These furnaces meet the South Coast Air Quality Management District (SCAQMD) Rule 1111 and San Joaquin Valley Air Pollution Control District (SJVAPCD) Rule 4905 NOx emission limit (14 Ng/J) and can be installed within the SCAQMD and SJVAPCD areas. All units use a redundant gas valve to assure safety shut-off as required by CSA. All specifications are subject to change without notice.

CONTROLS

- Single stage gas operation with "Neg Reg" Gas Valve
- Durable silicon nitride ignitor
- Self diagnostics saving last 10 fault codes regardless of power interruption
- Control features electronic air cleaner and humidifier terminals

INSTALLATION FEATURES

- Electrical connection: Right side only on "A" width models. Left or right side on "B" and "C" width models.
- Gas Connection: Left side only on "A" width models. Left or right side on "B" and "C" width models.
- Removable floor base for bottom return air
- Zero step horizontal conversion


WARRANTY

See warranty document for details.

NOTE: Not For Sale in Canada



MODEL NUMBER GUIDE

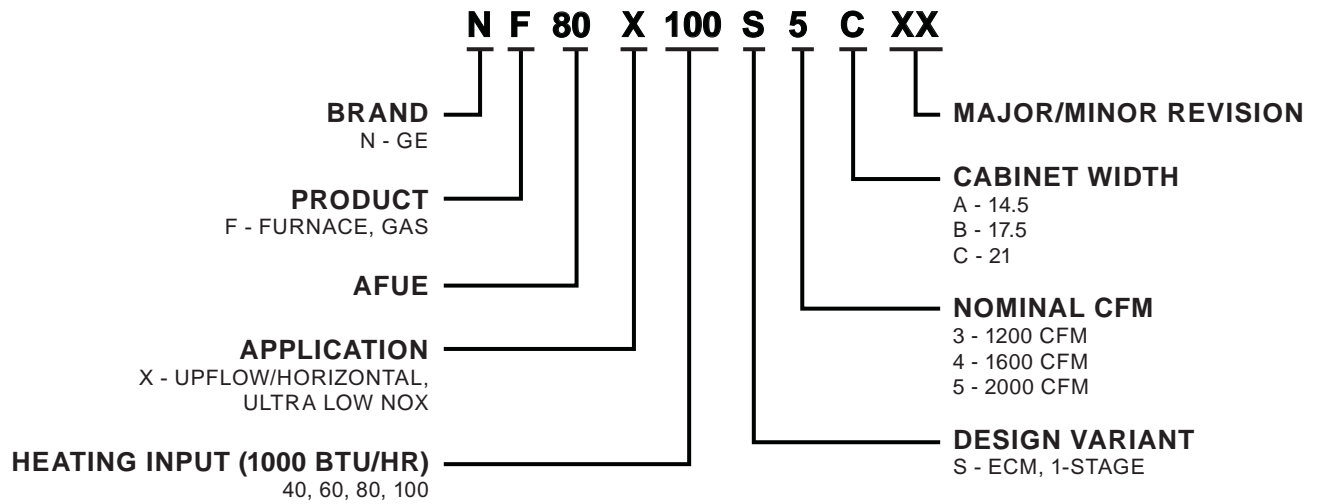

PHYSICAL AND ELECTRICAL DATA

Model	Input (Btuh)	Output (Btuh)	AFUE (ICS)	Nominal Cooling Capacity	Gas Inlet (in.)	Volts/ Hz/ Phase	Max. Time Delay Breaker or Fuse	Nominal Full Load Amps	Trans (VA)	Approx Shipping Weight (lbs)
NF80X040S3A	40,000	33,000	80%	3 Ton	1/2	120-60-1	15	6.8	40	100
NF80X060S3A	60,000	48,000	80%	3 Ton	1/2	120-60-1	15	6.8	40	113
NF80X080S4B	80,000	64,000	80%	4 Ton	1/2	120-60-1	15	8.4	40	125
NF80X100S5C	100,000	80,000	80%	5 Ton	1/2	120-60-1	15	10.9	40	149

Note: For vent length and clearances to combustibles, please reference installation instructions.

BLOWER PERFORMANCE DATA**NF80X040S3A Performance (less filter)**

External Static Pressure in. w.c.	Air Volume / Watts at Various Blower Speeds									
	High		Medium-High		Medium		Medium-Low		Low	
	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts
0.10	1389	251	1146	156	1007	111	963	98	945	94
0.20	1355	267	1098	171	935	115	826	89	789	79
0.30	1315	280	1068	184	881	126	768	97	646	75
0.40	1278	287	1022	194	837	133	709	108	593	84
0.50	1247	303	978	203	782	144	646	116	529	92
0.60	1199	317	948	216	719	151	602	126	471	102
0.70	1176	328	899	228	679	163	537	131	422	106
0.80	1128	344	860	235	627	172	500	141	382	115
0.90	1075	347	821	246	577	179	454	146	320	118
1.00	966	322	771	256	546	188	416	154	292	121

NF80X060S3A Performance (less filter)

External Static Pressure in. w.c.	Air Volume / Watts at Various Blower Speeds									
	High		Medium-High		Medium		Medium-Low		Low	
	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts
0.10	1389	251	1146	156	1007	111	963	98	945	94
0.20	1355	267	1098	171	935	115	826	89	789	79
0.30	1315	280	1068	184	881	126	768	97	646	75
0.40	1278	287	1022	194	837	133	709	108	593	84
0.50	1247	303	978	203	782	144	646	116	529	92
0.60	1199	317	948	216	719	151	602	126	471	102
0.70	1176	328	899	228	679	163	537	131	422	106
0.80	1128	344	860	235	627	172	500	141	382	115
0.90	1075	347	821	246	577	179	454	146	320	118
1.00	966	322	771	256	546	188	416	154	292	121

NF80X080S4B Performance (less filter)

External Static Pressure in. w.c.	Air Volume / Watts at Various Blower Speeds									
	High		Medium-High		Medium		Medium-Low		Low	
	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts
0.10	1828	419	1640	297	1503	238	1440	209	1240	147
0.20	1775	438	1571	318	1446	255	1385	229	1187	159
0.30	1727	457	1515	335	1393	275	1323	244	1110	173
0.40	1676	473	1477	349	1340	292	1263	259	1058	190
0.50	1632	490	1422	376	1290	309	1200	276	991	201
0.60	1575	509	1370	391	1227	326	1154	290	922	218
0.70	1502	507	1309	407	1171	343	1092	305	869	232
0.80	1335	460	1267	422	1114	357	1043	320	804	243
0.90	1115	395	1091	381	1047	367	984	334	735	255
1.00	829	310	845	322	846	318	858	321	669	266

BLOWER PERFORMANCE DATA

NF80X100S5C Performance (less filter)

External Static Pressure in. w.g.	Air Volume / Watts at Different Blower Speeds																			
	Bottom Return Air, Side Return Air with Optional Return Air Base, Return Air from Both Sides or Return Air from Bottom and One Side.										Single Side Return Air – Air volumes in bold require field fabricated transition to accommodate 20 x 25 x 1 in. air filter in order to maintain proper air velocity.									
	High		Med-High		Medium		Med-Low		Low		High		Med-High		Medium		Med-Low		Low	
	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts	cfm	Watts
0.10	2216	637	1961	438	1707	305	1576	245	1457	193	2245	633	1980	427	1763	299	1592	240	1486	194
0.20	2165	663	1921	460	1667	324	1515	255	1323	190	2200	652	1931	454	1685	323	1533	253	1343	189
0.30	2129	684	1853	486	1624	344	1460	275	1262	208	2147	678	1876	474	1640	343	1470	273	1276	205
0.40	2060	710	1818	508	1559	365	1401	294	1193	222	2110	702	1815	491	1574	358	1424	292	1198	219
0.50	2030	726	1775	526	1515	380	1346	317	1134	238	2064	725	1777	516	1525	375	1360	312	1134	236
0.60	1985	749	1707	547	1453	401	1312	332	1080	252	2025	744	1726	533	1476	398	1311	330	1083	253
0.70	1931	769	1662	567	1405	419	1238	346	1012	269	1973	765	1673	558	1417	420	1243	344	1025	268
0.80	1882	789	1617	586	1364	438	1190	364	946	278	1925	788	1636	577	1372	436	1193	361	955	277
0.90	1832	807	1565	606	1317	457	1135	381	893	294	1883	806	1575	597	1312	457	1148	378	908	293
1.00	1727	772	1533	623	1244	468	1059	397	823	304	1785	789	1531	616	1263	469	1089	390	838	301





Allowable Heating Speeds					
Models	Red	Yellow	Blue	Brown	Black
040	Not Allowed	Factory Setting	Allowed	Allowed	Not Allowed
060		Allowed	Factory Setting		
080		Factory Setting	Allowed		
100			Not Allowed		

Allowable Circulation Speeds					
Models	Red	Yellow	Blue	Brown	Black
All Models	Factory Setting	Not Allowed	Not Allowed	Not Allowed	Not Allowed

Note: See installation instructions for Return Air configurations and proper Blower setup.


DIMENSIONS - UPFLOW (IN.)

Model	A	B	C	D
NF80X040S3A	14-1/2	13-3/8	13	4-3/4
NF80X060S3A	14-1/2	13-3/8	13	4-3/4
NF80X080S4B	17-1/2	16-3/8	16	6-1/4
NF80X100S5C	21	19-7/8	19-1/2	8

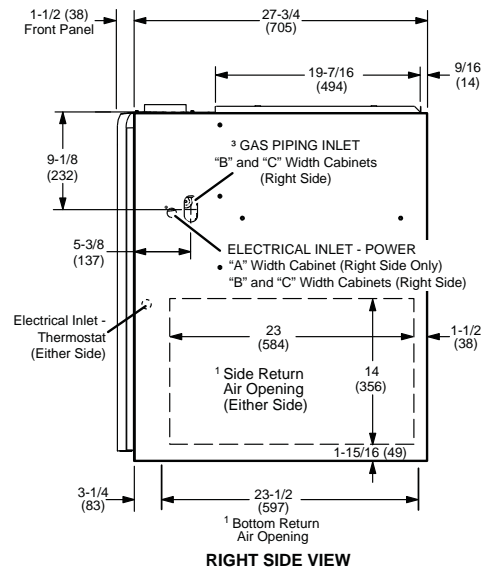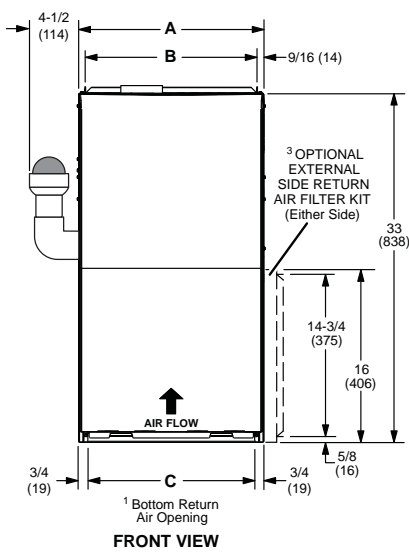
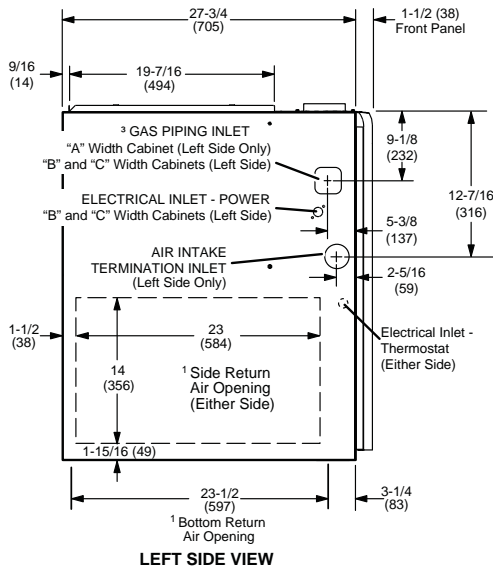
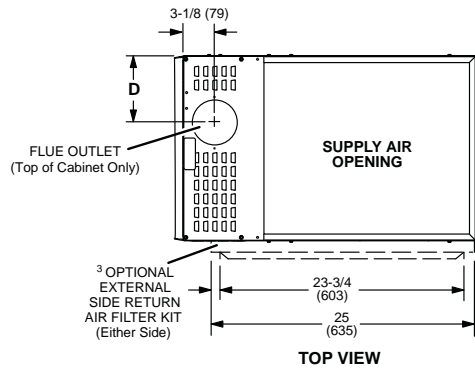


DIMENSIONS - HORIZONTAL (IN.)


LEFT-HAND AIR DISCHARGE

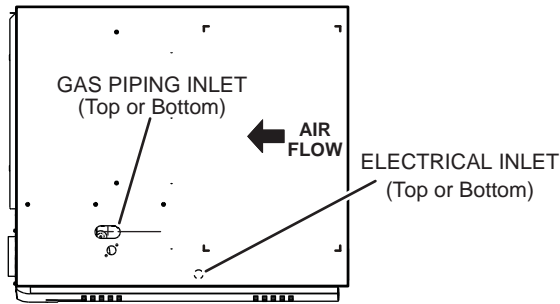




¹ Flue outlet is horizontal on cabinet, but furnace must be vented vertically

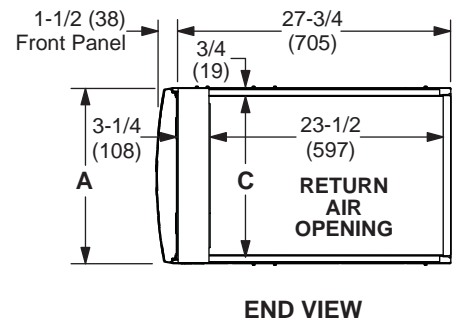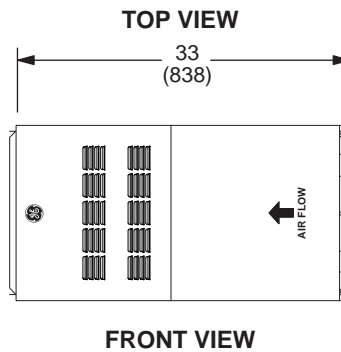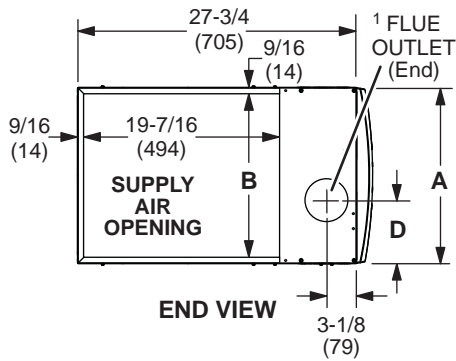

RIGHT-HAND AIR DISCHARGE

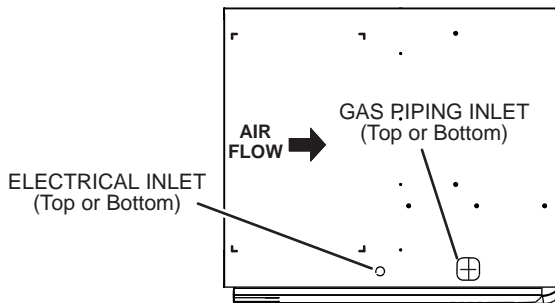

¹ Flue outlet is horizontal on cabinet, but furnace must be vented vertically

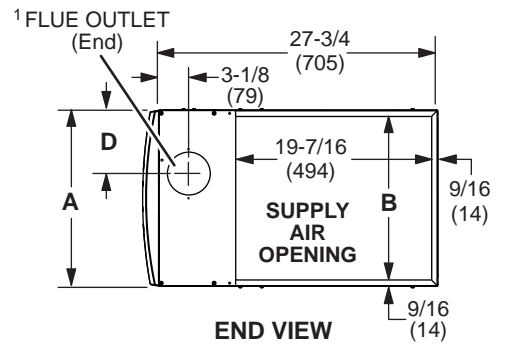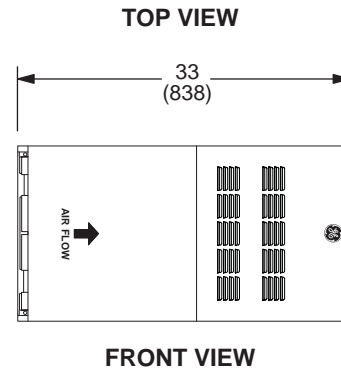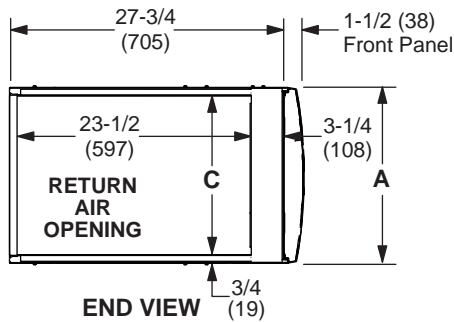

ACCESSORY LIST

CATALOG NUMBER	DESCRIPTION
Return Air Base	
68W61	14.5", A Width
68W62	17.5", B Width
68W63	21.0", C Width
Twinning Kit	
16W72	Constant Torque Gas Furnace Twinning Kit
Intake Kit	
25B23	Low Profile Air Intake Kit

		Natural Gas High Altitude Conversion Kit
MODEL NUMBER	Description	0-7500
NF80X040S3A	80% Upflow 1-stage ULN ECM	These units are approved for installations from 0-7500'.
NF80X060S3A		
NF80X080S4B		
NF80X100S5C		

Note: LP conversion is not available for these models.



GE APPLIANCES
a Haier company