

TECHNICAL GUIDE

TECHNICAL GUIDE

LX SERIES

SPLIT SYSTEM

AIR CONDITIONERS

13 SEER – R-410A – 1 PHASE

1.5 THRU 5 NOMINAL TONS

MODELS: RAC13L18 THRU 60



Due to continuous product improvement, specifications are subject to change without notice.

Visit us on the web at

www.upgnet.com

Additional rating information can be found at

www.ahridirectory.org

WARRANTY SUMMARY*

Standard 5-Years limited parts warranty.

Standard 5-Years limited compressor warranty.

Extended 10-Years limited parts and compressor warranty when product is registered online within 90 days of purchase for replacement or closing for new home construction.

*Does not apply to R-22 models, 3-Phase models, or Internet sales.

See Limited Warranty certificate in User's Information Manual for details.

DESCRIPTION

The RAC13L models are optimized for the 13 SEER Regional Minimum Efficiency in the North US and Canada, and are specifically designed to be matched with Johnson Controls Unitary Products indoor coils, furnaces, and air handlers to provide a complete system solution.

FEATURES

- **Easier Installation** - Independent panels provide quick access for unit setup. Installation time is reduced by easy power and control wiring access. Options are provided for indoor piston or TXV. The factory installed filter-drier and factory charge for a 15-Ft lineset means less time spent brazing and charging the system. The small base dimension and reduced unit clearances make for easier retrofits.
- **Durable Finish** - The coated steel wire fan guard, coated external fasteners, and pre-treated G90-equivalent galvanized steel chassis components resist corrosion and rust creep. Powdercoat paint further protects external panels.
- **Louvered Coil Protection** - Two stamped steel louvered panels protect the coil from mechanical damage.
- **Quality Coils** - The high efficiency microchannel aluminum coil is manufactured using an improved material system providing reliable performance and small unit size.
- **Protected Compressor** - Compressors are protected internally by a high pressure relief valve and a temperature sensor, and externally by the system high pressure switch. The liquid line filter-drier is factory installed to protect the compressor against moisture and debris.
- **Environmentally Friendly** - CFC-free R-410A refrigerant delivers environmentally friendly performance with zero ozone depletion.
- **Top Discharge** - Warm air is blown up, away from the structure and any landscaping and allows compact location on multi-unit applications.
- **Agency Listed** - Safety certified by CSA to UL 1995 / CSA 22.2. Performance certified to ANSI/AHRI Standard 210/240 in accordance with the Unitary Small Equipment certification program.

LIST OF SECTIONS

DESCRIPTION	1
FEATURES	1
NOMENCLATURE	2
PHYSICAL AND ELECTRICAL DATA	3
DIMENSIONS	3
SYSTEM CHARGE FOR VARIOUS MATCHED SYSTEMS	4
COOLING CAPACITY - With Air Handler Coils	5
COOLING CAPACITY - Upflow, Downflow & Horizontal Furnaces and Coils (Coil Only Ratings)	6
COOLING CAPACITY - With High Efficiency Motor Furnaces ...	8
APPLICATIONS AND ACCESSORIES	22
SOUND POWER RATINGS	22
TYPICAL INSTALLATION	23
TYPICAL FIELD WIRING	24
ALTERNATIVE INSTALLATION CLEARANCES	24
PERFORMANCE DATA - 1.5 TON	25
PERFORMANCE DATA - 2 TON	27
PERFORMANCE DATA - 2.5 TON	29
PERFORMANCE DATA - 3 TON	32
PERFORMANCE DATA - 3.5 TON	35
PERFORMANCE DATA - 4 TON	38
PERFORMANCE DATA - 5 TON	40

NOMENCLATURE

BRAND	R	R = OTC Factory Branded G = Guardian
PRODUCT TYPE	AC	AC = Air Conditioner HP = Heat Pump AW = Southwest Region Air Conditioner
NOMINAL SERIES EFFICIENCY AND STAGING	13	13 = 13 SEER / 1-Stage (US Northern Region) 14 = 14 SEER / 1-Stage (US Southeast or Southwest Region)
CABINET AND CONNECTION TYPE	L	L = New Chassis Louvered / Sweat Connect
NOMINAL UNIT CAPACITY (MBH)	36	18 = 1.5 Ton 42 = 3.5 Ton 24 = 2 Ton 48 = 4 Ton 30 = 2.5 Ton 60 = 5 Ton 36 = 3 Ton
REFRIGERANT	B	B = R-410A
VOLTAGE (Voltage-Phase-Hertz)	2	2 = 208/230-1-60
GENERATION (MAJOR REVISION)	1	1 = 1st Gen 2 = 2nd Gen etc
FACTORY OPTION	S	S = Standard (No Options)
STYLE LETTER (MINOR REVISION) NOT USED FOR ORDERING	A	A = Style A B = Style B etc

PHYSICAL AND ELECTRICAL DATA

MODEL		RAC13L18 B21S	RAC13L24 B21S	RAC13L30 B21S	RAC13L36 B21S	RAC13L42 B21S	RAC13L48 B21S	RAC13L60 B21S
Unit Supply Voltage		208-230V, 1 ϕ , 60Hz						
Normal Voltage Range ¹		187 to 252						
Minimum Circuit Ampacity		9.6	12.3	14.2	19.9	21.9	28.5	34.3
Max. Overcurrent Device Amps ²		15	20	20	30	35	50	60
Min. Overcurrent Device Amps ³		15	15	15	20	25	30	35
Compressor Type		Recip	Recip	Recip	Recip	Recip	Scroll	Scroll
Compressor Amps	Rated Load	7.0	9.2	10.7	14.7	16.5	21.8	26.4
	Locked Rotor	45.0	45.0	57.0	78.0	88.0	117	134
Crankcase Heater		No	No	No	No	No	No	No
Factory External Discharge Muffler		No	No	No	No	Yes	No	No
HS Kit Required with TXV ⁴		Yes*	Yes*	Yes*	Yes*	Yes*	No	No
Fan Diameter Inches		18	18	18	18	22	22	22
Fan Motor	Rated HP	1/8	1/8	1/8	1/4	1/4	1/4	1/4
	Rated Load Amps	0.80	0.80	0.80	1.50	1.30	1.30	1.30
	Nominal RPM	1075	1075	1075	1100	850	850	850
	Nominal CFM	1925	1950	2150	2575	2925	3225	3350
Coil	Face Area Sq. Ft.	8.26	9.78	11.07	12.37	12.22	13.83	17.37
	Rows Deep	1	1	1	1	1	1	1
	Fins / Inch	23	23	23	23	23	23	23
Liquid Line Set OD (Field Installed)		3/8	3/8	3/8	3/8	3/8	3/8	3/8
Vapor Line Set OD (Field Installed) ⁵		3/4	3/4	3/4	3/4	7/8	7/8	1-1/8†
Unit Charge (Lbs. - Oz.) ⁶		2 - 15	3 - 4	3 - 13	4 - 1	4 - 6	4 - 8	5 - 6
Charge Per Foot, Oz.		0.62	0.62	0.62	0.62	0.67	0.67	0.75
Operating Weight Lbs.		130	135	145	145	185	175	185

1. Rated in accordance with AHRI Standard 110-2012, utilization range "A".


2. Dual element fuses or HACR circuit breaker. Maximum allowable overcurrent protection.

3. Dual element fuses or HACR circuit breaker. Minimum recommended overcurrent protection.

4. See Hard Start Kit Accessory Installation Manual for Hard Start Kit part number for each model.

5. For applications with non-standard vapor line sizes, see the "Applications & Accessories" section of this Technical Guide.

6. The Unit Charge is correct for the outdoor unit, smallest matched indoor unit, and 15 feet of refrigerant tubing. For tubing lengths other than 15 feet, add or subtract the amount of refrigerant, using the difference in actual lineset length (not the equivalent length) multiplied by the per foot value.

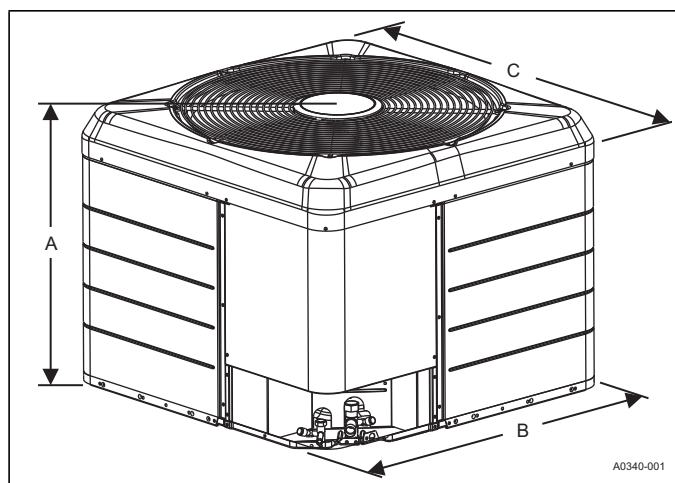

DIMENSIONS

Unit Model	Dimensions (Inches)			Refrigerant Connection Service Valve Size	
	A	B	C	Liquid	Vapor
RAC13L18B21S	23-1/2	24	24	3/8	3/4
RAC13L24B21S	26-3/4	24	24		
RAC13L30B21S	30	24	24		
RAC13L36B21S	33-1/4	24	24		
RAC13L42B21S	26-3/4	29-1/4	29-1/4	3/8	7/8
RAC13L48B21S	30	29-1/4	29-1/4		
RAC13L60B21S	36-1/4	29-1/4	29-1/4		
					7/8†

† Adapter fitting must be field installed for the required 1-1/8" line set.

All dimensions are in inches and are subject to change without notice.

Overall height is from bottom of base pan to top of fan guard.

Overall length and width include screw heads.

SYSTEM CHARGE FOR VARIOUS MATCHED SYSTEMS

Outdoor Unit	RAC13L18 B21S	RAC13L24 B21S	RAC13L30 B21S	RAC13L36 B21S	RAC13L42 B21S	RAC13L48 B21S	RAC13L60 B21S
Required Orifice or TXV ^{1,2}	0.047 / BA1	0.057 / BA1	0.063 / BA1	0.067 / BC1	0.073 / BC1	0.077 / BC1	0.084 / BD1
Indoor Unit ^{3,4,5}	Additional Charge, oz						
RFCX18BP	0	—	—	—	—	—	—
RFCX24BP	3	0	—	—	—	—	—
RFCX30BP	10	7	2	—	—	—	—
RFCX36BP	10	7	2	0	—	—	—
RFCX36CP	—	11	2	2	—	—	—
RFCX42CP	—	11	2	2	0	—	—
RFCX48(CP,DP)	—	—	—	5	2	0	—
RFCX60(CP,DP)	—	—	—	—	9	2	0
RFCX18BE	0	—	—	—	—	—	—
RFCX24BE	3	0	—	—	—	—	—
RFCX30BE	8	5	0	—	—	—	—
RFCX36(BE,CE)	10	7	2	0	—	—	—
RFCX42CE	—	—	—	5	2	—	—
RFCX48(CE,DE)	—	—	—	5	2	0	—
RFCX60CE	—	—	—	—	9	2	0
RFCX60DE	—	—	—	—	29 oz TXV ONLY	22 oz TXV ONLY	20 oz TXV ONLY
CF/CM/CU18(A,B)	0	—	—	—	—	—	—
CF/CM/CU24(A,B)	3	0	—	—	—	—	—
CF/CM/CU30(A,B,C)	8	5	0	—	—	—	—
CF/CM/CU36(A,B,C,D)	10	7	2	0	—	—	—
CF/CM/CU42(B,C,D)	—	11	2	2	0	—	—
CF/CM/CU48(C,D)	—	—	—	5	2	0	—
CF/CM/CU60(C,D)	—	—	—	—	9	2	0
CF/CM64D	—	—	—	—	29 oz TXV ONLY	22 oz TXV ONLY	20 oz TXV ONLY
Some of the combinations shown in the above System Charge table require Advanced Main Air Circulating Fan indoor product. For approved coil only matches, please see the "COOLING CAPACITY - Upflow, Downflow & Horizontal Furnaces and Coils" table.							

FOOTNOTES:

- For applications requiring a TXV, use S1-1TVM*** series kit.
- Approved orifice(s) shipped with outdoor unit.
- Systems matched with furnaces or air handlers not equipped with blower-off delays may require blower Time Delay Kit S1-2FD06700224.
- CF coils cannot be used in horizontal applications.
- Charge adders shown above do not indicate that coils are rated for every application. Refer to Performance Data Tables for actual performance for specified system matches. Obtain certified system ratings from www.ahridirectory.org.

CHARGING PROCEDURES:

- Check the Factory Unit Charge listed on the unit nameplate to verify the refrigerant charge for the outdoor unit, the smallest matched indoor unit, and the 15 feet of interconnecting lineset.
- Verify the indoor metering device and additional charge required for the specific matched indoor unit in the system using the above table.
- Add additional charge for the amount of interconnecting lineset greater than 15 feet at the rate specified in the Physical and Electrical Table.
- For installations requiring additional charge, weigh in refrigerant for the specific matching indoor unit and actual lineset length.
- Once the charge adders for matched indoor unit and for lineset have been weighed in, verify the system operation against the temperatures and pressures in the Charging Chart for the outdoor unit. Locate Charging Charts on the outdoor unit and also in the Service Data Application Guide on www.upgnet.com. Follow the Subcool or the Superheat charging procedure in the Installation Manual according to the type of indoor metering device in the system, and allow ten minutes after each charge adjustment for the system operation to stabilize. Record the charge adjustment made to match the Charging Chart.
- Permanently stamp the unit data plate with the TOTAL SYSTEM CHARGE defined as follows: TOTAL SYSTEM CHARGE = Base Charge (as shipped) + charge adder for matched indoor unit + charge adder for actual lineset length + charge adjustments to match the Charging Chart.

COOLING CAPACITY - With Air Handler Coils

UNIT MODEL	AIR HANDLER		COIL MODEL ¹	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L18B21S	RFCX18BE06MP22	17.5	—	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RFCX24BE08MP22	17.5	—	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RFCX30BE10MP22	17.5	—	600	18.0	14.0	15.00	12.75
RAC13L18B21S	RFCX36BE12MP22	17.5	—	625	18.0	13.9	14.50	12.50
RAC13L18B21S	RFCX36CE12MP22	21.0	—	600	18.0	13.6	14.25	12.25
RAC13L18B21S	RFCX18BP06MP22	17.5	—	600	18.0	13.8	13.50	11.50
RAC13L18B21S	RFCX24BP08MP22	17.5	—	600	18.0	13.8	13.00	11.25
RAC13L18B21S	RFCX30BP10MP22	17.5	—	600	18.0	13.6	13.50	11.50
RAC13L24B21S	RFCX24BE08MP22	17.5	—	800	24.0	17.8	14.25	12.00
RAC13L24B21S	RFCX30BE10MP22	17.5	—	800	24.0	17.8	14.50	12.25
RAC13L24B21S	RFCX36BE12MP22	17.5	—	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RFCX36CE12MP22	21.0	—	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RFCX24BP08MP22	17.5	—	800	23.8	17.4	13.00	11.00
RAC13L24B21S	RFCX30BP10MP22	17.5	—	800	24.0	17.6	13.50	11.50
RAC13L24B21S	RFCX36BP12MP22	17.5	—	900	24.0	18.4	13.00	11.25
RAC13L24B21S	RFCX36CP12MP22	21.0	—	850	24.0	18.0	13.00	11.25
RAC13L30B21S	RFCX30BE10MP22	17.5	—	825	29.4	20.2	14.00	12.00
RAC13L30B21S	RFCX36BE12MP22	17.5	—	1000	30.0	22.2	14.00	12.00
RAC13L30B21S	RFCX36BE12MP22	17.5	—	975	30.0	22.2	14.00	12.00
RAC13L30B21S	RFCX36CE12MP22	21.0	—	1000	30.0	22.0	14.50	12.25
RAC13L30B21S	RFCX30BP10MP22	17.5	—	1000	30.0	21.8	13.00	11.25
RAC13L30B21S	RFCX36BP12MP22	17.5	—	1000	30.0	21.8	13.00	11.25
RAC13L30B21S	RFCX36CP12MP22	21.0	—	1000	30.0	21.6	13.00	11.25
RAC13L30B21S	RFCX42CP14MP22	21.0	—	1100	30.0	22.6	13.00	11.00
RAC13L36B21S	RFCX36BE12MP22	17.5	—	1000	35.2	23.8	14.00	11.75
RAC13L36B21S	RFCX36CE12MP22	21.0	—	1000	35.2	24.0	14.25	12.25
RAC13L36B21S	RFCX42CE14MP22	21.0	—	1200	36.0	26.2	14.00	12.00
RAC13L36B21S	RFCX48CE16MP22	21.0	—	1225	36.0	26.4	14.00	12.00
RAC13L36B21S	RFCX48DE16MP22	24.5	—	1225	36.0	26.4	14.25	12.25
RAC13L36B21S	RFCX36BP12MP22	17.5	—	1000	34.6	23.4	13.00	11.00
RAC13L36B21S	RFCX36CP12MP22	21.0	—	1125	35.0	24.8	13.00	11.00
RAC13L36B21S	RFCX42CP14MP22	21.0	—	1125	35.0	24.8	13.00	11.00
RAC13L36B21S	RFCX48CP16MP22	21.0	—	1200	35.2	25.4	13.00	11.00
RAC13L36B21S	RFCX48DP16MP22	24.5	—	1200	35.2	25.4	13.00	11.00
RAC13L42B21S	RFCX42CE14MP22	21.0	—	1375	42.0	31.0	13.75	11.75
RAC13L42B21S	RFCX48CE16MP22	21.0	—	1225	41.0	29.0	14.00	12.00
RAC13L42B21S	RFCX48DE16MP22	24.5	—	1225	41.0	29.0	14.00	12.00
RAC13L42B21S	RFCX60CE20MP22	21.0	—	1425	42.0	31.5	14.00	12.00
RAC13L42B21S	RFCX60DE20MP22	24.5	—	1400	42.0	31.0	14.25	12.25
RAC13L42B21S	RFCX42CP14MP22	21.0	—	1225	40.0	28.0	13.00	11.00
RAC13L42B21S	RFCX48CP16MP22	21.0	—	1300	42.0	30.0	13.00	11.00
RAC13L42B21S	RFCX48DP16MP22	24.5	—	1325	42.0	30.0	13.00	11.25
RAC13L42B21S	RFCX60CP20MP22	21.0	—	1350	42.0	30.5	13.00	11.00
RAC13L42B21S	RFCX60DP20MP22	24.5	—	1475	42.0	31.5	13.00	11.00
RAC13L48B21S	RFCX48CE16MP22	21.0	—	1425	47.5	35.0	14.25	12.25
RAC13L48B21S	RFCX48DE16MP22	24.5	—	1425	48.0	35.5	14.50	12.25
RAC13L48B21S	RFCX60CE20MP22	21.0	—	1425	48.0	35.5	14.50	12.25
RAC13L48B21S	RFCX60DE20MP22	24.5	—	1400	48.0	35.0	14.75	12.25
RAC13L48B21S	RFCX48CP16MP22	21.0	—	1300	46.0	32.5	13.25	11.50

For Notes See Page 6.

COOLING CAPACITY - With Air Handler Coils (Continued)

UNIT MODEL	AIR HANDLER		COIL MODEL ¹	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L48B21S	RFCX48DP16MP22	24.5	—	1475	47.5	35.0	13.00	11.00
RAC13L48B21S	RFCX60CP20MP22	21.0	—	1500	48.0	35.5	13.00	11.25
RAC13L48B21S	RFCX60DP20MP22	24.5	—	1475	47.5	35.0	13.25	11.25
RAC13L60B21S	RFCX60CE20MP22	21.0	—	1625	56.0	40.0	13.25	11.25
RAC13L60B21S	RFCX60DE20MP22	24.5	—	1775	57.0	41.5	13.25	11.25
RAC13L60B21S	RFCX60CP20MP22	21.0	—	1525	54.5	38.0	13.00	10.75
RAC13L60B21S	RFCX60DP20MP22	24.5	—	1550	55.0	38.5	13.00	10.75

Rated in accordance with DOE test procedures (Federal Register 12-27-79 and 3-18-88) and ANSI/AHRI Standard 210/240.

Cooling MBH based on 80°F entering air temperature, 50% RH (Relative Humidity), and rated air flow.

EER (Energy Efficiency Ratio) is the total cooling output in BTUs at 95°F outdoor ambient divided by the total electric power in watt-hours at those conditions.

SEER (Seasonal Energy Efficiency Ratio) is the total cooling output in BTUs during a normal annual usage period for cooling divided by the total electric power input in watt-hours during the same period.

1. CM coils available with a factory installed horizontal drain pan. See price pages for specific model number.

— = Not applicable.

MP Modular Air Handlers use Coil Only Ratings.

COOLING CAPACITY - Upflow, Downflow & Horizontal Furnaces and Coils (Coil Only Ratings)

UNIT MODEL	COIL		CFM RANGE (MIN.-MAX.)	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER ¹	EER
					TOTAL	SENS.		
RAC13L18B21S	CF/CM/CU18A	14.5	450 - 750	600	17.5	13.3	13.00	11.00
RAC13L18B21S	CF/CM/CU18B	17.5	450 - 750	600	17.5	13.3	13.00	11.00
RAC13L18B21S	CF/CM/CU24A	14.5	450 - 750	600	18.0	13.8	13.00	11.00
RAC13L18B21S	CF/CM/CU24B	17.5	450 - 750	600	18.0	13.8	13.00	11.00
RAC13L18B21S	CF/CM/CU24C	21.0	450 - 750	600	18.0	13.8	13.00	11.00
RAC13L18B21S	CF/CM/CU30A	14.5	450 - 750	600	18.0	13.9	13.00	11.25
RAC13L18B21S	CF/CM/CU30B	17.5	450 - 750	600	18.0	13.9	13.00	11.25
RAC13L18B21S	CF/CM/CU30C	21.0	450 - 750	600	18.0	13.9	13.00	11.25
RAC13L18B21S	CF/CM/CU30D	24.5	450 - 750	600	18.0	13.9	13.00	11.25
RAC13L18B21S	CF/CM/CU36B	17.5	450 - 750	600	18.0	13.6	13.00	11.25
RAC13L18B21S	CF/CM/CU36C	21.0	450 - 750	600	18.0	13.6	13.00	11.25
RAC13L18B21S	CF/CM/CU36D	24.5	450 - 750	600	18.0	13.6	13.00	11.25
RAC13L18B21S	CF/CM36A	14.5	450 - 750	600	18.0	13.6	13.00	11.25
RAC13L24B21S	CF/CM/CU24A	14.5	600 - 1000	800	23.6	17.4	13.00	11.00
RAC13L24B21S	CF/CM/CU24B	17.5	600 - 1000	800	23.6	17.4	13.00	11.00
RAC13L24B21S	CF/CM/CU24C	21.0	600 - 1000	800	23.6	17.4	13.00	11.00
RAC13L24B21S	CF/CM/CU30A	14.5	600 - 1000	800	24.0	17.8	13.00	11.00
RAC13L24B21S	CF/CM/CU30B	17.5	600 - 1000	800	24.0	17.8	13.00	11.00
RAC13L24B21S	CF/CM/CU30C	21.0	600 - 1000	800	24.0	17.8	13.00	11.00
RAC13L24B21S	CF/CM/CU30D	24.5	600 - 1000	800	24.0	17.8	13.00	11.00
RAC13L24B21S	CF/CM/CU36B	17.5	600 - 1000	800	24.0	17.4	13.00	11.00
RAC13L24B21S	CF/CM/CU36C	21.0	600 - 1000	800	24.0	17.4	13.00	11.00
RAC13L24B21S	CF/CM/CU36D	24.5	600 - 1000	800	24.0	17.4	13.00	11.00
RAC13L24B21S	CF/CM/CU42C	21.0	600 - 1000	800	24.0	17.6	13.00	11.25
RAC13L24B21S	CF/CM/CU42D	24.5	600 - 1000	800	24.0	17.6	13.00	11.25
RAC13L24B21S	CF/CM36A	14.5	600 - 1000	800	24.0	17.4	13.00	11.00
RAC13L24B21S	CF42B	17.5	600 - 1000	800	24.0	17.6	13.00	11.25

For Notes See Page 7.

COOLING CAPACITY - Upflow, Downflow & Horizontal Furnaces and Coils (Coil Only Ratings) (Continued)

UNIT MODEL	COIL		CFM RANGE (MIN.-MAX.)	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER ¹	EER
					TOTAL	SENS.		
RAC13L30B21S	CF/CM/CU30B	17.5	800 - 1200	1000	29.0	21.2	13.00	11.00
RAC13L30B21S	CF/CM/CU30C	21.0	800 - 1200	1000	29.0	21.2	13.00	11.00
RAC13L30B21S	CF/CM/CU30D	24.5	800 - 1200	1000	29.0	21.2	13.00	11.00
RAC13L30B21S	CF/CM/CU36B	17.5	800 - 1200	1000	29.8	21.8	13.00	11.00
RAC13L30B21S	CF/CM/CU36C	21.0	800 - 1200	1000	29.8	21.8	13.00	11.00
RAC13L30B21S	CF/CM/CU36D	24.5	800 - 1200	1000	29.8	21.8	13.00	11.00
RAC13L30B21S	CF/CM/CU42C	21.0	800 - 1200	1000	29.8	21.6	13.00	11.00
RAC13L30B21S	CF/CM/CU42D	24.5	800 - 1200	1000	29.8	21.6	13.00	11.00
RAC13L30B21S	CF42B	17.5	800 - 1200	1000	29.8	21.6	13.00	11.00
RAC13L36B21S	CF/CM/CU36B	17.5	1000 - 1400	1200	34.4	25.0	13.00	11.00
RAC13L36B21S	CF/CM/CU36C	21.0	1000 - 1400	1200	34.4	25.0	13.00	11.00
RAC13L36B21S	CF/CM/CU36D	24.5	1000 - 1400	1200	34.4	25.0	13.00	11.00
RAC13L36B21S	CF/CM/CU42C	21.0	1000 - 1400	1200	35.2	25.6	13.00	11.00
RAC13L36B21S	CF/CM/CU42D	24.5	1000 - 1400	1200	35.2	25.6	13.00	11.00
RAC13L36B21S	CF/CM/CU48C	21.0	1000 - 1400	1200	35.2	25.4	13.00	11.00
RAC13L36B21S	CF/CM/CU48D	24.5	1000 - 1400	1200	35.2	25.4	13.00	11.00
RAC13L36B21S	CF42B	17.5	1000 - 1400	1200	35.2	25.6	13.00	11.00
RAC13L42B21S	CF/CM/CU42C	21.0	1200 - 1600	1400	41.0	30.5	13.00	11.00
RAC13L42B21S	CF/CM/CU42D	24.5	1200 - 1600	1400	41.0	30.5	13.00	11.00
RAC13L42B21S	CF/CM/CU48C	21.0	1200 - 1600	1400	42.0	31.0	13.00	11.00
RAC13L42B21S	CF/CM/CU48D	24.5	1200 - 1600	1400	42.0	31.0	13.00	11.00
RAC13L42B21S	CF/CM/CU60C	21.0	1200 - 1600	1400	42.0	31.0	13.00	11.00
RAC13L42B21S	CF/CM/CU60D	24.5	1200 - 1600	1400	42.0	31.0	13.00	11.00
RAC13L42B21S	CF/CM64D	24.5	1200 - 1600	1400	42.0	31.0	13.00	11.25
RAC13L42B21S	CF42B	17.5	1200 - 1600	1225	40.0	28.0	13.00	11.00
RAC13L48B21S	CF/CM/CU48C	21.0	1400 - 1800	1600	46.0	33.5	13.00	11.00
RAC13L48B21S	CF/CM/CU48D	24.5	1400 - 1800	1600	46.0	33.5	13.00	11.00
RAC13L48B21S	CF/CM/CU60C	21.0	1400 - 1800	1600	48.0	36.0	13.00	11.25
RAC13L48B21S	CF/CM/CU60D	24.5	1400 - 1800	1600	48.0	36.0	13.00	11.25
RAC13L48B21S	CF/CM64D	24.5	1400 - 1800	1600	48.0	36.0	13.00	11.25
RAC13L60B21S	CF/CM/CU60C	21.0	1520 - 1920	1720	55.0	40.0	13.00	11.00
RAC13L60B21S	CF/CM/CU60D	24.5	1520 - 1920	1725	55.0	40.0	13.00	11.00
RAC13L60B21S	CF/CM64D	24.5	1520 - 1920	1725	56.5	41.0	13.00	11.00

For rated condition information, see the footnotes below the System Capacity - Single Piece and Modular Air Handlers table.

1. Requires a S1-2FD06700224 Blower Time Delay unless a standard furnace is equipped with one.

— = Not Applicable.

MP Modular Air Handlers use Coil Only Ratings.

Furnaces that are listed individually in the above table, such as the RGF1L*P, RGF19*P, and RGF1L*E use Coil Only Ratings.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L18B21S	RGF2L060AE12MP11	14.5	CF/CM/CU18A	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF2L060AE12MP11	14.5	CF/CM/CU24A	650	18.0	14.4	15.00	12.75
RAC13L18B21S	RGF2L060AE12MP11	14.5	CF/CM/CU30A	625	18.0	14.0	15.00	12.50
RAC13L18B21S	RGF2L060AE12MP11	14.5	CF/CM36A	600	18.0	13.8	14.75	12.50
RAC13L18B21S	RGF2L080BE12MP11	17.5	CF/CM/CU18B	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF2L080BE12MP11	17.5	CF/CM/CU24B	600	18.0	13.8	14.50	12.50
RAC13L18B21S	RGF2L080BE12MP11	17.5	CF/CM/CU30B	600	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF2L080BE12MP11	17.5	CF/CM/CU36B	600	18.0	13.8	14.75	12.50
RAC13L18B21S	RGF2L080CE16MP11	21.0	CF/CM/CU24C	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF2L080CE16MP11	21.0	CF/CM/CU30C	600	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF2L080CE16MP11	21.0	CF/CM/CU30D	625	18.0	14.0	14.75	12.50
RAC13L18B21S	RGF2L080CE16MP11	21.0	CF/CM/CU36C	600	18.0	13.7	14.75	12.50
RAC13L18B21S	RGF2L080CE16MP11	21.0	CF/CM/CU36D	625	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF2L100CE16MP11	21.0	CF/CM/CU24C	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF2L100CE16MP11	21.0	CF/CM/CU30C	600	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF2L100CE16MP11	21.0	CF/CM/CU30D	625	18.0	14.0	14.75	12.50
RAC13L18B21S	RGF2L100CE16MP11	21.0	CF/CM/CU36C	600	18.0	13.7	14.75	12.50
RAC13L18B21S	RGF2L100CE16MP11	21.0	CF/CM/CU36D	625	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF19060BE12MP12	17.5	CF/CM/CU18B	600	18.0	13.8	14.00	12.25
RAC13L18B21S	RGF19060BE12MP12	17.5	CF/CM/CU24B	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF19060BE12MP12	17.5	CF/CM/CU30B	600	18.0	13.9	14.75	12.25
RAC13L18B21S	RGF19060BE12MP12	17.5	CF/CM/CU36B	600	18.0	13.7	14.75	12.50
RAC13L18B21S	RGF19080BE12MP12	17.5	CF/CM/CU18B	600	18.0	13.8	14.00	12.25
RAC13L18B21S	RGF19080BE12MP12	17.5	CF/CM/CU24B	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF19080BE12MP12	17.5	CF/CM/CU30B	600	18.0	13.9	14.75	12.25
RAC13L18B21S	RGF19080BE12MP12	17.5	CF/CM/CU36B	600	18.0	13.7	14.75	12.50
RAC13L18B21S	RGF19080CE16MP12	21.0	CF/CM/CU24C	600	18.0	13.8	14.75	12.50
RAC13L18B21S	RGF19080CE16MP12	21.0	CF/CM/CU30C	600	18.0	14.0	15.00	12.50
RAC13L18B21S	RGF19080CE16MP12	21.0	CF/CM/CU30D	600	18.0	13.9	15.00	12.50
RAC13L18B21S	RGF19080CE16MP12	21.0	CF/CM/CU36C	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RGF19080CE16MP12	21.0	CF/CM/CU36D	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RGF19100CE16MP12	21.0	CF/CM/CU24C	600	18.0	13.8	14.75	12.50
RAC13L18B21S	RGF19100CE16MP12	21.0	CF/CM/CU30C	600	18.0	14.0	15.00	12.50
RAC13L18B21S	RGF19100CE16MP12	21.0	CF/CM/CU30D	600	18.0	13.9	15.00	12.50
RAC13L18B21S	RGF19100CE16MP12	21.0	CF/CM/CU36C	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RGF19100CE16MP12	21.0	CF/CM/CU36D	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RGF19100CE20MP12	21.0	CF/CM/CU24C	625	18.0	14.0	13.50	11.50
RAC13L18B21S	RGF19100CE20MP12	21.0	CF/CM/CU30C	625	18.0	14.0	13.75	11.75
RAC13L18B21S	RGF19100CE20MP12	21.0	CF/CM/CU30D	650	18.0	14.2	13.75	11.75
RAC13L18B21S	RGF19100CE20MP12	21.0	CF/CM/CU36C	625	18.0	14.0	13.75	11.75
RAC13L18B21S	RGF19100CE20MP12	21.0	CF/CM/CU36D	650	18.0	14.2	13.75	11.75
RAC13L18B21S	RGF19120DE20MP12	24.5	CF/CM/CU30D	600	18.0	13.9	13.75	11.75
RAC13L18B21S	RGF19120DE20MP12	24.5	CF/CM/CU36D	600	18.0	13.6	13.75	11.75
RAC13L18B21S	RGF29060BE12MP11	17.5	CF/CM/CU18B	600	18.0	13.8	14.00	12.25
RAC13L18B21S	RGF29060BE12MP11	17.5	CF/CM/CU24B	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF29060BE12MP11	17.5	CF/CM/CU30B	600	18.0	13.9	14.75	12.25
RAC13L18B21S	RGF29060BE12MP11	17.5	CF/CM/CU36B	600	18.0	13.7	14.75	12.50
RAC13L18B21S	RGF29080BE12MP11	17.5	CF/CM/CU18B	600	18.0	13.8	14.00	12.25

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L18B21S	RGF29080BE12MP11	17.5	CF/CM/CU24B	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF29080BE12MP11	17.5	CF/CM/CU30B	600	18.0	13.9	14.75	12.25
RAC13L18B21S	RGF29080BE12MP11	17.5	CF/CM/CU36B	600	18.0	13.7	14.75	12.50
RAC13L18B21S	RGF29080CE16MP11	21.0	CF/CM/CU24C	600	18.0	13.8	14.75	12.50
RAC13L18B21S	RGF29080CE16MP11	21.0	CF/CM/CU30C	600	18.0	14.0	15.00	12.50
RAC13L18B21S	RGF29080CE16MP11	21.0	CF/CM/CU30D	600	18.0	13.9	15.00	12.50
RAC13L18B21S	RGF29080CE16MP11	21.0	CF/CM/CU36C	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RGF29080CE16MP11	21.0	CF/CM/CU36D	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RGF29100CE16MP11	21.0	CF/CM/CU24C	600	18.0	13.8	14.75	12.50
RAC13L18B21S	RGF29100CE16MP11	21.0	CF/CM/CU30C	600	18.0	14.0	15.00	12.50
RAC13L18B21S	RGF29100CE16MP11	21.0	CF/CM/CU30D	600	18.0	13.9	15.00	12.50
RAC13L18B21S	RGF29100CE16MP11	21.0	CF/CM/CU36C	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RGF29100CE16MP11	21.0	CF/CM/CU36D	600	18.0	13.8	15.00	12.75
RAC13L18B21S	RGF29100CE20MP11	21.0	CF/CM/CU24C	625	18.0	14.0	13.50	11.50
RAC13L18B21S	RGF29100CE20MP11	21.0	CF/CM/CU30C	625	18.0	14.0	13.75	11.75
RAC13L18B21S	RGF29100CE20MP11	21.0	CF/CM/CU30D	650	18.0	14.2	13.75	11.75
RAC13L18B21S	RGF29100CE20MP11	21.0	CF/CM/CU36C	625	18.0	14.0	13.75	11.75
RAC13L18B21S	RGF29100CE20MP11	21.0	CF/CM/CU36D	650	18.0	14.2	13.75	11.75
RAC13L18B21S	RGF29120DE20MP11	24.5	CF/CM/CU30D	600	18.0	13.9	13.75	11.75
RAC13L18B21S	RGF29120DE20MP11	24.5	CF/CM/CU36D	600	18.0	13.6	13.75	11.75
RAC13L18B21S	RGF1L060AE12MP11	14.5	CF/CM/CU18A	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF1L060AE12MP11	14.5	CF/CM/CU24A	650	18.0	14.4	15.00	12.75
RAC13L18B21S	RGF1L060AE12MP11	14.5	CF/CM/CU30A	625	18.0	14.0	15.00	12.50
RAC13L18B21S	RGF1L060AE12MP11	14.5	CF/CM36A	600	18.0	13.8	14.75	12.50
RAC13L18B21S	RGF1L080BE12MP11	17.5	CF/CM/CU18B	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF1L080BE12MP11	17.5	CF/CM/CU24B	600	18.0	13.8	14.50	12.50
RAC13L18B21S	RGF1L080BE12MP11	17.5	CF/CM/CU30B	600	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF1L080BE12MP11	17.5	CF/CM/CU36B	600	18.0	13.8	14.75	12.50
RAC13L18B21S	RGF1L080CE16MP11	21.0	CF/CM/CU24C	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF1L080CE16MP11	21.0	CF/CM/CU30C	600	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF1L080CE16MP11	21.0	CF/CM/CU30D	625	18.0	14.0	14.75	12.50
RAC13L18B21S	RGF1L080CE16MP11	21.0	CF/CM/CU36C	600	18.0	13.7	14.75	12.50
RAC13L18B21S	RGF1L080CE16MP11	21.0	CF/CM/CU36D	625	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF1L100CE16MP11	21.0	CF/CM/CU24C	600	18.0	13.8	14.25	12.25
RAC13L18B21S	RGF1L100CE16MP11	21.0	CF/CM/CU30C	600	18.0	13.9	14.75	12.50
RAC13L18B21S	RGF1L100CE16MP11	21.0	CF/CM/CU30D	625	18.0	14.0	14.75	12.50
RAC13L18B21S	RGF1L100CE16MP11	21.0	CF/CM/CU36C	600	18.0	13.7	14.75	12.50
RAC13L18B21S	RGF1L100CE16MP11	21.0	CF/CM/CU36D	625	18.0	13.9	14.75	12.50
RAC13L24B21S	RGF2L060AE12MP11	14.5	CF/CM/CU24A	800	24.0	17.8	14.00	11.75
RAC13L24B21S	RGF2L060AE12MP11	14.5	CF/CM/CU30A	800	24.0	17.8	14.50	12.25
RAC13L24B21S	RGF2L060AE12MP11	14.5	CF/CM36A	775	24.0	17.2	14.25	12.25
RAC13L24B21S	RGF2L080BE12MP11	17.5	CF/CM/CU24B	800	24.0	17.8	14.25	12.00
RAC13L24B21S	RGF2L080BE12MP11	17.5	CF/CM/CU30B	800	24.0	17.8	14.50	12.25
RAC13L24B21S	RGF2L080BE12MP11	17.5	CF/CM/CU36B	800	24.0	17.6	14.50	12.25
RAC13L24B21S	RGF2L080BE12MP11	17.5	CF42B	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF2L080CE16MP11	21.0	CF/CM/CU24C	800	24.0	18.0	14.50	12.25
RAC13L24B21S	RGF2L080CE16MP11	21.0	CF/CM/CU30C	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF2L080CE16MP11	21.0	CF/CM/CU30D	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF2L080CE16MP11	21.0	CF/CM/CU36C	800	24.0	17.6	14.75	12.25

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L24B21S	RGF2L080CE16MP11	21.0	CF/CM/CU36D	800	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF2L080CE16MP11	21.0	CF/CM/CU42C	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RGF2L080CE16MP11	21.0	CF/CM/CU42D	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RGF2L100CE16MP11	21.0	CF/CM/CU24C	800	24.0	18.0	14.50	12.25
RAC13L24B21S	RGF2L100CE16MP11	21.0	CF/CM/CU30C	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF2L100CE16MP11	21.0	CF/CM/CU30D	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF2L100CE16MP11	21.0	CF/CM/CU36C	800	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF2L100CE16MP11	21.0	CF/CM/CU36D	800	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF2L100CE16MP11	21.0	CF/CM/CU42C	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RGF2L100CE16MP11	21.0	CF/CM/CU42D	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RGF2L100CE20MP11	21.0	CF/CM/CU30C	800	24.0	17.8	13.50	11.50
RAC13L24B21S	RGF2L100CE20MP11	21.0	CF/CM/CU30D	825	24.0	18.0	13.50	11.50
RAC13L24B21S	RGF2L100CE20MP11	21.0	CF/CM/CU36C	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF2L100CE20MP11	21.0	CF/CM/CU36D	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF2L100CE20MP11	21.0	CF/CM/CU42C	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF2L100CE20MP11	21.0	CF/CM/CU42D	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF2L120CE20MP11	21.0	CF/CM/CU30C	800	24.0	17.8	13.50	11.50
RAC13L24B21S	RGF2L120CE20MP11	21.0	CF/CM/CU30D	825	24.0	18.0	13.50	11.50
RAC13L24B21S	RGF2L120CE20MP11	21.0	CF/CM/CU36C	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF2L120CE20MP11	21.0	CF/CM/CU36D	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF2L120CE20MP11	21.0	CF/CM/CU42C	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF2L120CE20MP11	21.0	CF/CM/CU42D	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF19060BE12MP12	17.5	CF/CM/CU24B	750	24.0	17.4	14.25	12.00
RAC13L24B21S	RGF19060BE12MP12	17.5	CF/CM/CU30B	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF19060BE12MP12	17.5	CF/CM/CU36B	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF19060BE12MP12	17.5	CF42B	750	24.0	17.2	14.75	12.25
RAC13L24B21S	RGF19080BE12MP12	17.5	CF/CM/CU24B	750	24.0	17.4	14.25	12.00
RAC13L24B21S	RGF19080BE12MP12	17.5	CF/CM/CU30B	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF19080BE12MP12	17.5	CF/CM/CU36B	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF19080BE12MP12	17.5	CF42B	750	24.0	17.2	14.75	12.25
RAC13L24B21S	RGF19080CE16MP12	21.0	CF/CM/CU24C	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF19080CE16MP12	21.0	CF/CM/CU30C	750	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF19080CE16MP12	21.0	CF/CM/CU30D	775	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF19080CE16MP12	21.0	CF/CM/CU36C	750	24.0	17.2	14.75	12.25
RAC13L24B21S	RGF19080CE16MP12	21.0	CF/CM/CU36D	775	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF19080CE16MP12	21.0	CF/CM/CU42C	750	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF19080CE16MP12	21.0	CF/CM/CU42D	775	24.0	17.6	15.00	12.50
RAC13L24B21S	RGF19100CE16MP12	21.0	CF/CM/CU24C	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF19100CE16MP12	21.0	CF/CM/CU30C	750	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF19100CE16MP12	21.0	CF/CM/CU30D	775	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF19100CE16MP12	21.0	CF/CM/CU36C	750	24.0	17.2	14.75	12.25
RAC13L24B21S	RGF19100CE16MP12	21.0	CF/CM/CU36D	775	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF19100CE16MP12	21.0	CF/CM/CU42C	750	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF19100CE16MP12	21.0	CF/CM/CU42D	775	24.0	17.6	15.00	12.50
RAC13L24B21S	RGF19100CE20MP12	21.0	CF/CM/CU24C	825	24.0	18.0	13.75	11.75
RAC13L24B21S	RGF19100CE20MP12	21.0	CF/CM/CU30C	825	24.0	18.0	14.00	11.75
RAC13L24B21S	RGF19100CE20MP12	21.0	CF/CM/CU30D	825	24.0	18.0	14.00	11.75
RAC13L24B21S	RGF19100CE20MP12	21.0	CF/CM/CU36C	825	24.0	17.8	14.00	11.75

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L24B21S	RGF19100CE20MP12	21.0	CF/CM/CU36D	825	24.0	17.8	14.25	12.00
RAC13L24B21S	RGF19100CE20MP12	21.0	CF/CM/CU42C	825	24.0	18.0	14.25	12.00
RAC13L24B21S	RGF19100CE20MP12	21.0	CF/CM/CU42D	825	24.0	18.0	14.25	12.00
RAC13L24B21S	RGF19120DE20MP12	24.5	CF/CM/CU30D	825	24.0	18.0	14.25	12.25
RAC13L24B21S	RGF19120DE20MP12	24.5	CF/CM/CU36D	800	24.0	17.6	14.25	12.25
RAC13L24B21S	RGF19120DE20MP12	24.5	CF/CM/CU42D	800	24.0	17.8	14.50	12.25
RAC13L24B21S	RGF29060BE12MP11	17.5	CF/CM/CU24B	750	24.0	17.4	14.25	12.00
RAC13L24B21S	RGF29060BE12MP11	17.5	CF/CM/CU30B	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF29060BE12MP11	17.5	CF/CM/CU36B	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF29060BE12MP11	17.5	CF42B	750	24.0	17.2	14.75	12.25
RAC13L24B21S	RGF29080BE12MP11	17.5	CF/CM/CU24B	750	24.0	17.4	14.25	12.00
RAC13L24B21S	RGF29080BE12MP11	17.5	CF/CM/CU30B	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF29080BE12MP11	17.5	CF/CM/CU36B	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF29080BE12MP11	17.5	CF42B	750	24.0	17.2	14.75	12.25
RAC13L24B21S	RGF29080CE16MP11	21.0	CF/CM/CU24C	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF29080CE16MP11	21.0	CF/CM/CU30C	750	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF29080CE16MP11	21.0	CF/CM/CU30D	775	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF29080CE16MP11	21.0	CF/CM/CU36C	750	24.0	17.2	14.75	12.25
RAC13L24B21S	RGF29080CE16MP11	21.0	CF/CM/CU36D	775	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF29080CE16MP11	21.0	CF/CM/CU42C	750	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF29080CE16MP11	21.0	CF/CM/CU42D	775	24.0	17.6	15.00	12.50
RAC13L24B21S	RGF29100CE16MP11	21.0	CF/CM/CU24C	750	24.0	17.4	14.50	12.25
RAC13L24B21S	RGF29100CE16MP11	21.0	CF/CM/CU30C	750	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF29100CE16MP11	21.0	CF/CM/CU30D	775	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF29100CE16MP11	21.0	CF/CM/CU36C	750	24.0	17.2	14.75	12.25
RAC13L24B21S	RGF29100CE16MP11	21.0	CF/CM/CU36D	775	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF29100CE16MP11	21.0	CF/CM/CU42C	750	24.0	17.4	14.75	12.25
RAC13L24B21S	RGF29100CE16MP11	21.0	CF/CM/CU42D	775	24.0	17.6	15.00	12.50
RAC13L24B21S	RGF29100CE20MP11	21.0	CF/CM/CU24C	825	24.0	18.0	13.75	11.75
RAC13L24B21S	RGF29100CE20MP11	21.0	CF/CM/CU30C	825	24.0	18.0	14.00	11.75
RAC13L24B21S	RGF29100CE20MP11	21.0	CF/CM/CU30D	825	24.0	18.0	14.00	11.75
RAC13L24B21S	RGF29100CE20MP11	21.0	CF/CM/CU36C	825	24.0	17.8	14.00	11.75
RAC13L24B21S	RGF29100CE20MP11	21.0	CF/CM/CU36D	825	24.0	17.8	14.25	12.00
RAC13L24B21S	RGF29100CE20MP11	21.0	CF/CM/CU42C	825	24.0	18.0	14.25	12.00
RAC13L24B21S	RGF29100CE20MP11	21.0	CF/CM/CU42D	825	24.0	18.0	14.25	12.00
RAC13L24B21S	RGF29120DE20MP11	24.5	CF/CM/CU30D	825	24.0	18.0	14.25	12.25
RAC13L24B21S	RGF29120DE20MP11	24.5	CF/CM/CU36D	800	24.0	17.6	14.25	12.25
RAC13L24B21S	RGF29120DE20MP11	24.5	CF/CM/CU42D	800	24.0	17.8	14.50	12.25
RAC13L24B21S	RGF1L060AE12MP11	14.5	CF/CM/CU24A	800	24.0	17.8	14.00	11.75
RAC13L24B21S	RGF1L060AE12MP11	14.5	CF/CM/CU30A	800	24.0	17.8	14.50	12.25
RAC13L24B21S	RGF1L060AE12MP11	14.5	CF/CM36A	775	24.0	17.2	14.25	12.25
RAC13L24B21S	RGF1L080BE12MP11	17.5	CF/CM/CU24B	800	24.0	17.8	14.25	12.00
RAC13L24B21S	RGF1L080BE12MP11	17.5	CF/CM/CU30B	800	24.0	17.8	14.50	12.25
RAC13L24B21S	RGF1L080BE12MP11	17.5	CF/CM/CU36B	800	24.0	17.6	14.50	12.25
RAC13L24B21S	RGF1L080BE12MP11	17.5	CF42B	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF1L080CE16MP11	21.0	CF/CM/CU24C	800	24.0	18.0	14.50	12.25
RAC13L24B21S	RGF1L080CE16MP11	21.0	CF/CM/CU30C	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF1L080CE16MP11	21.0	CF/CM/CU30D	800	24.0	17.8	14.75	12.25

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L24B21S	RGF1L080CE16MP11	21.0	CF/CM/CU36C	800	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF1L080CE16MP11	21.0	CF/CM/CU36D	800	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF1L080CE16MP11	21.0	CF/CM/CU42C	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RGF1L080CE16MP11	21.0	CF/CM/CU42D	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RGF1L100CE16MP11	21.0	CF/CM/CU24C	800	24.0	18.0	14.50	12.25
RAC13L24B21S	RGF1L100CE16MP11	21.0	CF/CM/CU30C	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF1L100CE16MP11	21.0	CF/CM/CU30D	800	24.0	17.8	14.75	12.25
RAC13L24B21S	RGF1L100CE16MP11	21.0	CF/CM/CU36C	800	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF1L100CE16MP11	21.0	CF/CM/CU36D	800	24.0	17.6	14.75	12.25
RAC13L24B21S	RGF1L100CE16MP11	21.0	CF/CM/CU42C	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RGF1L100CE16MP11	21.0	CF/CM/CU42D	800	24.0	17.8	15.00	12.50
RAC13L24B21S	RGF1L100CE20MP11	21.0	CF/CM/CU30C	800	24.0	17.8	13.50	11.50
RAC13L24B21S	RGF1L100CE20MP11	21.0	CF/CM/CU30D	825	24.0	18.0	13.50	11.50
RAC13L24B21S	RGF1L100CE20MP11	21.0	CF/CM/CU36C	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF1L100CE20MP11	21.0	CF/CM/CU36D	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF1L100CE20MP11	21.0	CF/CM/CU42C	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF1L100CE20MP11	21.0	CF/CM/CU42D	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF1L120CE20MP11	21.0	CF/CM/CU30C	800	24.0	17.8	13.50	11.50
RAC13L24B21S	RGF1L120CE20MP11	21.0	CF/CM/CU30D	825	24.0	18.0	13.50	11.50
RAC13L24B21S	RGF1L120CE20MP11	21.0	CF/CM/CU36C	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF1L120CE20MP11	21.0	CF/CM/CU36D	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF1L120CE20MP11	21.0	CF/CM/CU42C	825	24.0	17.8	13.75	11.50
RAC13L24B21S	RGF1L120CE20MP11	21.0	CF/CM/CU42D	825	24.0	17.8	13.75	11.50
RAC13L30B21S	RGF2L060AE12MP11	14.5	CF/CM/CU30A	850	29.2	19.8	13.50	11.50
RAC13L30B21S	RGF2L060AE12MP11	14.5	CF/CM36A	975	30.0	21.4	13.50	11.50
RAC13L30B21S	RGF2L080BE12MP11	17.5	CF/CM/CU30B	1000	30.0	22.0	13.75	11.75
RAC13L30B21S	RGF2L080BE12MP11	17.5	CF/CM/CU36B	1000	30.0	22.0	13.75	11.75
RAC13L30B21S	RGF2L080BE12MP11	17.5	CF42B	1000	30.0	21.8	14.00	11.75
RAC13L30B21S	RGF2L080CE16MP11	21.0	CF/CM/CU30C	1050	30.0	22.6	14.00	12.00
RAC13L30B21S	RGF2L080CE16MP11	21.0	CF/CM/CU30D	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF2L080CE16MP11	21.0	CF/CM/CU36C	1050	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF2L080CE16MP11	21.0	CF/CM/CU36D	1075	30.0	22.6	14.25	12.00
RAC13L30B21S	RGF2L080CE16MP11	21.0	CF/CM/CU42C	1050	30.0	22.4	14.25	12.25
RAC13L30B21S	RGF2L080CE16MP11	21.0	CF/CM/CU42D	1075	30.0	22.4	14.50	12.25
RAC13L30B21S	RGF2L100CE16MP11	21.0	CF/CM/CU30C	1050	30.0	22.6	14.00	12.00
RAC13L30B21S	RGF2L100CE16MP11	21.0	CF/CM/CU30D	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF2L100CE16MP11	21.0	CF/CM/CU36C	1050	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF2L100CE16MP11	21.0	CF/CM/CU36D	1075	30.0	22.6	14.25	12.00
RAC13L30B21S	RGF2L100CE16MP11	21.0	CF/CM/CU42C	1050	30.0	22.4	14.25	12.25
RAC13L30B21S	RGF2L100CE16MP11	21.0	CF/CM/CU42D	1075	30.0	22.4	14.50	12.25
RAC13L30B21S	RGF2L100CE20MP11	21.0	CF/CM/CU30C	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF2L100CE20MP11	21.0	CF/CM/CU30D	1050	30.0	22.6	14.00	12.00
RAC13L30B21S	RGF2L100CE20MP11	21.0	CF/CM/CU36C	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF2L100CE20MP11	21.0	CF/CM/CU36D	1100	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF2L100CE20MP11	21.0	CF/CM/CU42C	1075	30.0	22.4	14.25	12.25
RAC13L30B21S	RGF2L100CE20MP11	21.0	CF/CM/CU42D	1100	30.0	22.8	14.50	12.25
RAC13L30B21S	RGF2L120CE20MP11	21.0	CF/CM/CU30C	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF2L120CE20MP11	21.0	CF/CM/CU30D	1050	30.0	22.6	14.00	12.00

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L30B21S	RGF2L120CE20MP11	21.0	CF/CM/CU36C	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF2L120CE20MP11	21.0	CF/CM/CU36D	1100	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF2L120CE20MP11	21.0	CF/CM/CU42C	1075	30.0	22.4	14.25	12.25
RAC13L30B21S	RGF2L120CE20MP11	21.0	CF/CM/CU42D	1100	30.0	22.8	14.50	12.25
RAC13L30B21S	RGF19060BE12MP12	17.5	CF/CM/CU30B	900	29.6	21.0	13.75	11.75
RAC13L30B21S	RGF19060BE12MP12	17.5	CF/CM/CU36B	900	29.8	20.8	13.75	11.75
RAC13L30B21S	RGF19060BE12MP12	17.5	CF42B	900	29.8	20.8	14.00	11.75
RAC13L30B21S	RGF19080BE12MP12	17.5	CF/CM/CU30B	900	29.6	21.0	13.75	11.75
RAC13L30B21S	RGF19080BE12MP12	17.5	CF/CM/CU36B	900	29.8	20.8	13.75	11.75
RAC13L30B21S	RGF19080BE12MP12	17.5	CF42B	900	29.8	20.8	14.00	11.75
RAC13L30B21S	RGF19080CE16MP12	21.0	CF/CM/CU30C	1075	30.0	22.8	13.75	11.75
RAC13L30B21S	RGF19080CE16MP12	21.0	CF/CM/CU30D	1050	30.0	22.6	13.75	11.75
RAC13L30B21S	RGF19080CE16MP12	21.0	CF/CM/CU36C	1075	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF19080CE16MP12	21.0	CF/CM/CU36D	1075	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF19080CE16MP12	21.0	CF/CM/CU42C	1050	30.0	22.4	14.00	11.75
RAC13L30B21S	RGF19080CE16MP12	21.0	CF/CM/CU42D	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF19100CE16MP12	21.0	CF/CM/CU30C	1075	30.0	22.8	13.75	11.75
RAC13L30B21S	RGF19100CE16MP12	21.0	CF/CM/CU30D	1050	30.0	22.6	13.75	11.75
RAC13L30B21S	RGF19100CE16MP12	21.0	CF/CM/CU36C	1075	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF19100CE16MP12	21.0	CF/CM/CU36D	1075	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF19100CE16MP12	21.0	CF/CM/CU42C	1050	30.0	22.4	14.00	11.75
RAC13L30B21S	RGF19100CE16MP12	21.0	CF/CM/CU42D	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF19100CE20MP12	21.0	CF/CM/CU30C	975	30.0	22.0	14.25	12.00
RAC13L30B21S	RGF19100CE20MP12	21.0	CF/CM/CU30D	825	29.0	19.8	13.50	11.50
RAC13L30B21S	RGF19100CE20MP12	21.0	CF/CM/CU36C	975	30.0	21.8	14.25	12.25
RAC13L30B21S	RGF19100CE20MP12	21.0	CF/CM/CU36D	975	30.0	21.8	14.25	12.25
RAC13L30B21S	RGF19100CE20MP12	21.0	CF/CM/CU42C	975	30.0	21.8	14.50	12.25
RAC13L30B21S	RGF19100CE20MP12	21.0	CF/CM/CU42D	975	30.0	21.8	14.50	12.25
RAC13L30B21S	RGF19120DE20MP12	24.5	CF/CM/CU30D	975	30.0	21.8	14.25	12.25
RAC13L30B21S	RGF19120DE20MP12	24.5	CF/CM/CU36D	975	30.0	21.8	14.50	12.25
RAC13L30B21S	RGF19120DE20MP12	24.5	CF/CM/CU42D	975	30.0	21.8	14.75	12.25
RAC13L30B21S	RGF29060BE12MP11	17.5	CF/CM/CU30B	900	29.6	21.0	13.75	11.75
RAC13L30B21S	RGF29060BE12MP11	17.5	CF/CM/CU36B	900	29.8	20.8	13.75	11.75
RAC13L30B21S	RGF29060BE12MP11	17.5	CF42B	900	29.8	20.8	14.00	11.75
RAC13L30B21S	RGF29080BE12MP11	17.5	CF/CM/CU30B	900	29.6	21.0	13.75	11.75
RAC13L30B21S	RGF29080BE12MP11	17.5	CF/CM/CU36B	900	29.8	20.8	13.75	11.75
RAC13L30B21S	RGF29080BE12MP11	17.5	CF42B	900	29.8	20.8	14.00	11.75
RAC13L30B21S	RGF29080CE16MP11	21.0	CF/CM/CU30C	1075	30.0	22.8	13.75	11.75
RAC13L30B21S	RGF29080CE16MP11	21.0	CF/CM/CU30D	1050	30.0	22.6	13.75	11.75
RAC13L30B21S	RGF29080CE16MP11	21.0	CF/CM/CU36C	1075	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF29080CE16MP11	21.0	CF/CM/CU36D	1075	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF29080CE16MP11	21.0	CF/CM/CU42C	1050	30.0	22.4	14.00	11.75
RAC13L30B21S	RGF29080CE16MP11	21.0	CF/CM/CU42D	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF29100CE16MP11	21.0	CF/CM/CU30C	1075	30.0	22.8	13.75	11.75
RAC13L30B21S	RGF29100CE16MP11	21.0	CF/CM/CU30D	1050	30.0	22.6	13.75	11.75
RAC13L30B21S	RGF29100CE16MP11	21.0	CF/CM/CU36C	1075	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF29100CE16MP11	21.0	CF/CM/CU36D	1075	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF29100CE16MP11	21.0	CF/CM/CU42C	1050	30.0	22.4	14.00	11.75

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L30B21S	RGF29100CE16MP11	21.0	CF/CM/CU42D	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF29100CE20MP11	21.0	CF/CM/CU30C	975	30.0	22.0	14.25	12.00
RAC13L30B21S	RGF29100CE20MP11	21.0	CF/CM/CU30D	825	29.0	19.8	13.50	11.50
RAC13L30B21S	RGF29100CE20MP11	21.0	CF/CM/CU36C	975	30.0	21.8	14.25	12.25
RAC13L30B21S	RGF29100CE20MP11	21.0	CF/CM/CU36D	975	30.0	21.8	14.25	12.25
RAC13L30B21S	RGF29100CE20MP11	21.0	CF/CM/CU42C	975	30.0	21.8	14.50	12.25
RAC13L30B21S	RGF29100CE20MP11	21.0	CF/CM/CU42D	975	30.0	21.8	14.50	12.25
RAC13L30B21S	RGF29120DE20MP11	24.5	CF/CM/CU30D	975	30.0	21.8	14.25	12.25
RAC13L30B21S	RGF29120DE20MP11	24.5	CF/CM/CU36D	975	30.0	21.8	14.50	12.25
RAC13L30B21S	RGF29120DE20MP11	24.5	CF/CM/CU42D	975	30.0	21.8	14.75	12.25
RAC13L30B21S	RGF1L060AE12MP11	14.5	CF/CM/CU30A	850	29.2	19.8	13.50	11.50
RAC13L30B21S	RGF1L060AE12MP11	14.5	CF/CM36A	975	30.0	21.4	13.50	11.50
RAC13L30B21S	RGF1L080BE12MP11	17.5	CF/CM/CU30B	1000	30.0	22.0	13.75	11.75
RAC13L30B21S	RGF1L080BE12MP11	17.5	CF/CM/CU36B	1000	30.0	22.0	13.75	11.75
RAC13L30B21S	RGF1L080BE12MP11	17.5	CF42B	1000	30.0	21.8	14.00	11.75
RAC13L30B21S	RGF1L080CE16MP11	21.0	CF/CM/CU30C	1050	30.0	22.6	14.00	12.00
RAC13L30B21S	RGF1L080CE16MP11	21.0	CF/CM/CU30D	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF1L080CE16MP11	21.0	CF/CM/CU36C	1050	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF1L080CE16MP11	21.0	CF/CM/CU36D	1075	30.0	22.6	14.25	12.00
RAC13L30B21S	RGF1L080CE16MP11	21.0	CF/CM/CU42C	1050	30.0	22.4	14.25	12.25
RAC13L30B21S	RGF1L080CE16MP11	21.0	CF/CM/CU42D	1075	30.0	22.4	14.50	12.25
RAC13L30B21S	RGF1L100CE16MP11	21.0	CF/CM/CU30C	1050	30.0	22.6	14.00	12.00
RAC13L30B21S	RGF1L100CE16MP11	21.0	CF/CM/CU30D	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF1L100CE16MP11	21.0	CF/CM/CU36C	1050	30.0	22.4	14.00	12.00
RAC13L30B21S	RGF1L100CE16MP11	21.0	CF/CM/CU36D	1075	30.0	22.6	14.25	12.00
RAC13L30B21S	RGF1L100CE16MP11	21.0	CF/CM/CU42C	1050	30.0	22.4	14.25	12.25
RAC13L30B21S	RGF1L100CE16MP11	21.0	CF/CM/CU42D	1075	30.0	22.4	14.50	12.25
RAC13L30B21S	RGF1L100CE20MP11	21.0	CF/CM/CU30C	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF1L100CE20MP11	21.0	CF/CM/CU30D	1050	30.0	22.6	14.00	12.00
RAC13L30B21S	RGF1L100CE20MP11	21.0	CF/CM/CU36C	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF1L100CE20MP11	21.0	CF/CM/CU36D	1100	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF1L100CE20MP11	21.0	CF/CM/CU42C	1075	30.0	22.4	14.25	12.25
RAC13L30B21S	RGF1L100CE20MP11	21.0	CF/CM/CU42D	1100	30.0	22.8	14.50	12.25
RAC13L30B21S	RGF1L120CE20MP11	21.0	CF/CM/CU30C	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF1L120CE20MP11	21.0	CF/CM/CU30D	1050	30.0	22.6	14.00	12.00
RAC13L30B21S	RGF1L120CE20MP11	21.0	CF/CM/CU36C	1075	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF1L120CE20MP11	21.0	CF/CM/CU36D	1100	30.0	22.6	14.25	12.25
RAC13L30B21S	RGF1L120CE20MP11	21.0	CF/CM/CU42C	1075	30.0	22.4	14.25	12.25
RAC13L30B21S	RGF1L120CE20MP11	21.0	CF/CM/CU42D	1100	30.0	22.8	14.50	12.25
RAC13L36B21S	RGF2L060AE12MP11	14.5	CF/CM36A	975	35.0	23.4	13.50	11.50
RAC13L36B21S	RGF2L080BE12MP11	17.5	CF/CM/CU36B	1000	35.0	23.4	13.75	11.75
RAC13L36B21S	RGF2L080BE12MP11	17.5	CF42B	1000	35.2	23.8	13.75	11.75
RAC13L36B21S	RGF2L080CE16MP11	21.0	CF/CM/CU36C	1050	35.4	24.4	13.75	11.75
RAC13L36B21S	RGF2L080CE16MP11	21.0	CF/CM/CU36D	1075	35.4	24.6	14.00	12.00
RAC13L36B21S	RGF2L080CE16MP11	21.0	CF/CM/CU42C	1050	35.4	24.6	14.00	12.00
RAC13L36B21S	RGF2L080CE16MP11	21.0	CF/CM/CU42D	1075	35.6	25.0	14.00	12.00
RAC13L36B21S	RGF2L080CE16MP11	21.0	CF/CM/CU48C	1225	36.0	26.2	13.75	11.75
RAC13L36B21S	RGF2L080CE16MP11	21.0	CF/CM/CU48D	1075	35.6	24.8	14.00	12.00

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L36B21S	RGF2L100CE16MP11	21.0	CF/CM/CU36C	1050	35.4	24.4	13.75	11.75
RAC13L36B21S	RGF2L100CE16MP11	21.0	CF/CM/CU36D	1075	35.4	24.6	14.00	12.00
RAC13L36B21S	RGF2L100CE16MP11	21.0	CF/CM/CU42C	1050	35.4	24.6	14.00	12.00
RAC13L36B21S	RGF2L100CE16MP11	21.0	CF/CM/CU42D	1075	35.6	25.0	14.00	12.00
RAC13L36B21S	RGF2L100CE16MP11	21.0	CF/CM/CU48C	1225	36.0	26.2	13.75	11.75
RAC13L36B21S	RGF2L100CE16MP11	21.0	CF/CM/CU48D	1075	35.6	24.8	14.00	12.00
RAC13L36B21S	RGF2L100CE20MP11	21.0	CF/CM/CU36C	1300	35.8	27.0	13.75	11.75
RAC13L36B21S	RGF2L100CE20MP11	21.0	CF/CM/CU36D	1300	36.0	27.0	13.75	11.75
RAC13L36B21S	RGF2L100CE20MP11	21.0	CF/CM/CU42C	1075	35.6	25.0	14.00	12.00
RAC13L36B21S	RGF2L100CE20MP11	21.0	CF/CM/CU42D	1100	35.8	25.2	14.25	12.25
RAC13L36B21S	RGF2L100CE20MP11	21.0	CF/CM/CU48C	1275	36.0	26.8	13.75	11.75
RAC13L36B21S	RGF2L100CE20MP11	21.0	CF/CM/CU48D	1200	35.8	26.0	13.75	11.75
RAC13L36B21S	RGF2L120CE20MP11	21.0	CF/CM/CU36C	1300	35.8	27.0	13.75	11.75
RAC13L36B21S	RGF2L120CE20MP11	21.0	CF/CM/CU36D	1300	36.0	27.0	13.75	11.75
RAC13L36B21S	RGF2L120CE20MP11	21.0	CF/CM/CU42C	1075	35.6	25.0	14.00	12.00
RAC13L36B21S	RGF2L120CE20MP11	21.0	CF/CM/CU42D	1100	35.8	25.2	14.25	12.25
RAC13L36B21S	RGF2L120CE20MP11	21.0	CF/CM/CU48C	1275	36.0	26.8	13.75	11.75
RAC13L36B21S	RGF2L120CE20MP11	21.0	CF/CM/CU48D	1200	35.8	26.0	13.75	11.75
RAC13L36B21S	RGF19060BE12MP12	17.5	CF/CM/CU36B	975	35.0	23.4	13.50	11.50
RAC13L36B21S	RGF19060BE12MP12	17.5	CF42B	975	35.0	23.8	13.75	11.75
RAC13L36B21S	RGF19080BE12MP12	17.5	CF/CM/CU36B	975	35.0	23.4	13.50	11.50
RAC13L36B21S	RGF19080BE12MP12	17.5	CF42B	975	35.0	23.8	13.75	11.75
RAC13L36B21S	RGF19080CE16MP12	21.0	CF/CM/CU36C	1075	35.4	24.6	13.75	11.75
RAC13L36B21S	RGF19080CE16MP12	21.0	CF/CM/CU36D	1075	35.4	24.6	14.00	11.75
RAC13L36B21S	RGF19080CE16MP12	21.0	CF/CM/CU42C	1075	35.4	24.8	13.75	11.75
RAC13L36B21S	RGF19080CE16MP12	21.0	CF/CM/CU42D	1075	35.4	24.8	14.00	11.75
RAC13L36B21S	RGF19080CE16MP12	21.0	CF/CM/CU48C	1075	35.4	24.8	14.00	11.75
RAC13L36B21S	RGF19080CE16MP12	21.0	CF/CM/CU48D	1075	35.6	24.8	14.00	11.75
RAC13L36B21S	RGF19100CE16MP12	21.0	CF/CM/CU36C	1075	35.4	24.6	13.75	11.75
RAC13L36B21S	RGF19100CE16MP12	21.0	CF/CM/CU36D	1075	35.4	24.6	14.00	11.75
RAC13L36B21S	RGF19100CE16MP12	21.0	CF/CM/CU42C	1075	35.4	24.8	13.75	11.75
RAC13L36B21S	RGF19100CE16MP12	21.0	CF/CM/CU42D	1075	35.4	24.8	14.00	11.75
RAC13L36B21S	RGF19100CE16MP12	21.0	CF/CM/CU48C	1075	35.4	24.8	14.00	11.75
RAC13L36B21S	RGF19100CE16MP12	21.0	CF/CM/CU48D	1075	35.6	24.8	14.00	11.75
RAC13L36B21S	RGF19100CE20MP12	21.0	CF/CM/CU36C	975	35.2	23.6	14.00	12.00
RAC13L36B21S	RGF19100CE20MP12	21.0	CF/CM/CU36D	975	35.2	23.6	14.00	12.00
RAC13L36B21S	RGF19100CE20MP12	21.0	CF/CM/CU42C	975	35.4	23.8	14.25	12.25
RAC13L36B21S	RGF19100CE20MP12	21.0	CF/CM/CU42D	975	35.4	24.0	14.25	12.25
RAC13L36B21S	RGF19100CE20MP12	21.0	CF/CM/CU48C	975	35.6	23.8	14.00	12.00
RAC13L36B21S	RGF19100CE20MP12	21.0	CF/CM/CU48D	1000	35.6	23.8	14.25	12.25
RAC13L36B21S	RGF19120DE20MP12	24.5	CF/CM/CU36D	975	35.2	23.6	14.25	12.25
RAC13L36B21S	RGF19120DE20MP12	24.5	CF/CM/CU42D	975	35.4	24.0	14.25	12.25
RAC13L36B21S	RGF19120DE20MP12	24.5	CF/CM/CU48D	1250	36.0	26.6	14.00	11.75
RAC13L36B21S	RGF29060BE12MP11	17.5	CF/CM/CU36B	975	35.0	23.4	13.50	11.50
RAC13L36B21S	RGF29060BE12MP11	17.5	CF42B	975	35.0	23.8	13.75	11.75
RAC13L36B21S	RGF29080BE12MP11	17.5	CF/CM/CU36B	975	35.0	23.4	13.50	11.50
RAC13L36B21S	RGF29080BE12MP11	17.5	CF42B	975	35.0	23.8	13.75	11.75
RAC13L36B21S	RGF29080CE16MP11	21.0	CF/CM/CU36C	1075	35.4	24.6	13.75	11.75

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L36B21S	RGF29080CE16MP11	21.0	CF/CM/CU36D	1075	35.4	24.6	14.00	11.75
RAC13L36B21S	RGF29080CE16MP11	21.0	CF/CM/CU42C	1075	35.4	24.8	13.75	11.75
RAC13L36B21S	RGF29080CE16MP11	21.0	CF/CM/CU42D	1075	35.4	24.8	14.00	11.75
RAC13L36B21S	RGF29080CE16MP11	21.0	CF/CM/CU48C	1075	35.4	24.8	14.00	11.75
RAC13L36B21S	RGF29080CE16MP11	21.0	CF/CM/CU48D	1075	35.6	24.8	14.00	11.75
RAC13L36B21S	RGF29100CE16MP11	21.0	CF/CM/CU36C	1075	35.4	24.6	13.75	11.75
RAC13L36B21S	RGF29100CE16MP11	21.0	CF/CM/CU36D	1075	35.4	24.6	14.00	11.75
RAC13L36B21S	RGF29100CE16MP11	21.0	CF/CM/CU42C	1075	35.4	24.8	13.75	11.75
RAC13L36B21S	RGF29100CE16MP11	21.0	CF/CM/CU42D	1075	35.4	24.8	14.00	11.75
RAC13L36B21S	RGF29100CE16MP11	21.0	CF/CM/CU48C	1075	35.4	24.8	14.00	11.75
RAC13L36B21S	RGF29100CE16MP11	21.0	CF/CM/CU48D	1075	35.6	24.8	14.00	11.75
RAC13L36B21S	RGF29100CE20MP11	21.0	CF/CM/CU36C	975	35.2	23.6	14.00	12.00
RAC13L36B21S	RGF29100CE20MP11	21.0	CF/CM/CU36D	975	35.2	23.6	14.00	12.00
RAC13L36B21S	RGF29100CE20MP11	21.0	CF/CM/CU42C	975	35.4	23.8	14.25	12.25
RAC13L36B21S	RGF29100CE20MP11	21.0	CF/CM/CU42D	975	35.4	24.0	14.25	12.25
RAC13L36B21S	RGF29100CE20MP11	21.0	CF/CM/CU48C	975	35.6	23.8	14.00	12.00
RAC13L36B21S	RGF29100CE20MP11	21.0	CF/CM/CU48D	1000	35.6	23.8	14.25	12.25
RAC13L36B21S	RGF29120DE20MP11	24.5	CF/CM/CU36D	975	35.2	23.6	14.25	12.25
RAC13L36B21S	RGF29120DE20MP11	24.5	CF/CM/CU42D	975	35.4	24.0	14.25	12.25
RAC13L36B21S	RGF29120DE20MP11	24.5	CF/CM/CU48D	1250	36.0	26.6	14.00	11.75
RAC13L36B21S	RGF1L060AE12MP11	14.5	CF/CM36A	975	35.0	23.4	13.50	11.50
RAC13L36B21S	RGF1L080BE12MP11	17.5	CF/CM/CU36B	1000	35.0	23.4	13.75	11.75
RAC13L36B21S	RGF1L080BE12MP11	17.5	CF42B	1000	35.2	23.8	13.75	11.75
RAC13L36B21S	RGF1L080CE16MP11	21.0	CF/CM/CU36C	1050	35.4	24.4	13.75	11.75
RAC13L36B21S	RGF1L080CE16MP11	21.0	CF/CM/CU36D	1075	35.4	24.6	14.00	12.00
RAC13L36B21S	RGF1L080CE16MP11	21.0	CF/CM/CU42C	1050	35.4	24.6	14.00	12.00
RAC13L36B21S	RGF1L080CE16MP11	21.0	CF/CM/CU42D	1075	35.6	25.0	14.00	12.00
RAC13L36B21S	RGF1L080CE16MP11	21.0	CF/CM/CU48C	1225	36.0	26.2	13.75	11.75
RAC13L36B21S	RGF1L080CE16MP11	21.0	CF/CM/CU48D	1075	35.6	24.8	14.00	12.00
RAC13L36B21S	RGF1L100CE16MP11	21.0	CF/CM/CU36C	1050	35.4	24.4	13.75	11.75
RAC13L36B21S	RGF1L100CE16MP11	21.0	CF/CM/CU36D	1075	35.4	24.6	14.00	12.00
RAC13L36B21S	RGF1L100CE16MP11	21.0	CF/CM/CU42C	1050	35.4	24.6	14.00	12.00
RAC13L36B21S	RGF1L100CE16MP11	21.0	CF/CM/CU42D	1075	35.6	25.0	14.00	12.00
RAC13L36B21S	RGF1L100CE16MP11	21.0	CF/CM/CU48C	1225	36.0	26.2	13.75	11.75
RAC13L36B21S	RGF1L100CE16MP11	21.0	CF/CM/CU48D	1075	35.6	24.8	14.00	12.00
RAC13L36B21S	RGF1L100CE20MP11	21.0	CF/CM/CU36C	1300	35.8	27.0	13.75	11.75
RAC13L36B21S	RGF1L100CE20MP11	21.0	CF/CM/CU36D	1300	36.0	27.0	13.75	11.75
RAC13L36B21S	RGF1L100CE20MP11	21.0	CF/CM/CU42C	1075	35.6	25.0	14.00	12.00
RAC13L36B21S	RGF1L100CE20MP11	21.0	CF/CM/CU42D	1100	35.8	25.2	14.25	12.25
RAC13L36B21S	RGF1L100CE20MP11	21.0	CF/CM/CU48C	1275	36.0	26.8	13.75	11.75
RAC13L36B21S	RGF1L100CE20MP11	21.0	CF/CM/CU48D	1200	35.8	26.0	13.75	11.75
RAC13L36B21S	RGF1L120CE20MP11	21.0	CF/CM/CU36C	1300	35.8	27.0	13.75	11.75
RAC13L36B21S	RGF1L120CE20MP11	21.0	CF/CM/CU36D	1300	36.0	27.0	13.75	11.75
RAC13L36B21S	RGF1L120CE20MP11	21.0	CF/CM/CU42C	1075	35.6	25.0	14.00	12.00
RAC13L36B21S	RGF1L120CE20MP11	21.0	CF/CM/CU42D	1100	35.8	25.2	14.25	12.25
RAC13L36B21S	RGF1L120CE20MP11	21.0	CF/CM/CU48C	1275	36.0	26.8	13.75	11.75
RAC13L36B21S	RGF1L120CE20MP11	21.0	CF/CM/CU48D	1200	35.8	26.0	13.75	11.75

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L42B21S	RGF2L080BE12MP11	17.5	CF42B	1175	41.5	28.5	13.00	11.25
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU42C	1200	41.5	29.0	13.50	11.50
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU42D	1400	42.0	31.0	13.25	11.50
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU48C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU48D	1400	42.0	31.0	13.25	11.50
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU48D	1425	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU60C	1200	42.0	29.0	13.75	11.75
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU60C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU60D	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM/CU60D	1425	42.0	31.5	13.50	11.50
RAC13L42B21S	RGF2L080CE16MP11	21.0	CF/CM64D	1200	42.0	29.0	13.75	11.75
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU42C	1200	41.5	29.0	13.50	11.50
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU42D	1400	42.0	31.0	13.25	11.50
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU48C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU48D	1400	42.0	31.0	13.25	11.50
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU48D	1425	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU60C	1200	42.0	29.0	13.75	11.75
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU60C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU60D	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM/CU60D	1425	42.0	31.5	13.50	11.50
RAC13L42B21S	RGF2L100CE16MP11	21.0	CF/CM64D	1200	42.0	29.0	13.75	11.75
RAC13L42B21S	RGF2L100CE20MP11	21.0	CF/CM/CU42C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF2L100CE20MP11	21.0	CF/CM/CU42D	1275	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF2L100CE20MP11	21.0	CF/CM/CU48C	1275	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF2L100CE20MP11	21.0	CF/CM/CU48D	1300	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF2L100CE20MP11	21.0	CF/CM/CU60C	1275	42.0	30.5	14.00	12.00
RAC13L42B21S	RGF2L100CE20MP11	21.0	CF/CM/CU60D	1275	42.0	30.5	14.00	12.00
RAC13L42B21S	RGF2L100CE20MP11	21.0	CF/CM64D	1275	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF2L120CE20MP11	21.0	CF/CM/CU42C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF2L120CE20MP11	21.0	CF/CM/CU42D	1275	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF2L120CE20MP11	21.0	CF/CM/CU48C	1275	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF2L120CE20MP11	21.0	CF/CM/CU48D	1300	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF2L120CE20MP11	21.0	CF/CM/CU60C	1275	42.0	30.5	14.00	12.00
RAC13L42B21S	RGF2L120CE20MP11	21.0	CF/CM/CU60D	1275	42.0	30.5	14.00	12.00
RAC13L42B21S	RGF2L120CE20MP11	21.0	CF/CM64D	1275	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF19080CE16MP12	21.0	CF/CM/CU42C	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF19080CE16MP12	21.0	CF/CM/CU42D	1325	42.0	30.0	13.25	11.50
RAC13L42B21S	RGF19080CE16MP12	21.0	CF/CM/CU48C	1325	42.0	30.5	13.50	11.50
RAC13L42B21S	RGF19080CE16MP12	21.0	CF/CM/CU48D	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF19080CE16MP12	21.0	CF/CM/CU60C	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF19080CE16MP12	21.0	CF/CM/CU60C	1325	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF19080CE16MP12	21.0	CF/CM/CU60D	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF19080CE16MP12	21.0	CF/CM64D	1225	42.0	29.5	13.75	11.75
RAC13L42B21S	RGF19100CE16MP12	21.0	CF/CM/CU42C	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF19100CE16MP12	21.0	CF/CM/CU42D	1325	42.0	30.0	13.25	11.50
RAC13L42B21S	RGF19100CE16MP12	21.0	CF/CM/CU48C	1325	42.0	30.5	13.50	11.50
RAC13L42B21S	RGF19100CE16MP12	21.0	CF/CM/CU48D	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF19100CE16MP12	21.0	CF/CM/CU60C	1200	42.0	29.0	13.50	11.50

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L42B21S	RGF19100CE16MP12	21.0	CF/CM/CU60C	1325	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF19100CE16MP12	21.0	CF/CM/CU60D	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF19100CE16MP12	21.0	CF/CM64D	1225	42.0	29.5	13.75	11.75
RAC13L42B21S	RGF19100CE20MP12	21.0	CF/CM/CU42C	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF19100CE20MP12	21.0	CF/CM/CU42D	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF19100CE20MP12	21.0	CF/CM/CU48C	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF19100CE20MP12	21.0	CF/CM/CU48D	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF19100CE20MP12	21.0	CF/CM/CU60C	1225	42.0	29.5	13.75	11.75
RAC13L42B21S	RGF19100CE20MP12	21.0	CF/CM/CU60D	1250	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF19100CE20MP12	21.0	CF/CM64D	1225	42.0	29.5	14.00	12.00
RAC13L42B21S	RGF19120DE20MP12	24.5	CF/CM/CU42D	1250	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF19120DE20MP12	24.5	CF/CM/CU48D	1250	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF19120DE20MP12	24.5	CF/CM/CU60D	1225	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF19120DE20MP12	24.5	CF/CM64D	1225	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF29080CE16MP11	21.0	CF/CM/CU42C	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF29080CE16MP11	21.0	CF/CM/CU42D	1325	42.0	30.0	13.25	11.50
RAC13L42B21S	RGF29080CE16MP11	21.0	CF/CM/CU48C	1325	42.0	30.5	13.50	11.50
RAC13L42B21S	RGF29080CE16MP11	21.0	CF/CM/CU48D	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF29080CE16MP11	21.0	CF/CM/CU60C	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF29080CE16MP11	21.0	CF/CM/CU60C	1325	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF29080CE16MP11	21.0	CF/CM/CU60D	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF29080CE16MP11	21.0	CF/CM64D	1225	42.0	29.5	13.75	11.75
RAC13L42B21S	RGF29100CE16MP11	21.0	CF/CM/CU42C	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF29100CE16MP11	21.0	CF/CM/CU42D	1325	42.0	30.0	13.25	11.50
RAC13L42B21S	RGF29100CE16MP11	21.0	CF/CM/CU48C	1325	42.0	30.5	13.50	11.50
RAC13L42B21S	RGF29100CE16MP11	21.0	CF/CM/CU48D	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF29100CE16MP11	21.0	CF/CM/CU60C	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF29100CE16MP11	21.0	CF/CM/CU60C	1325	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF29100CE16MP11	21.0	CF/CM/CU60D	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF29100CE16MP11	21.0	CF/CM64D	1225	42.0	29.5	13.75	11.75
RAC13L42B21S	RGF29100CE20MP11	21.0	CF/CM/CU42C	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF29100CE20MP11	21.0	CF/CM/CU42D	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF29100CE20MP11	21.0	CF/CM/CU48C	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF29100CE20MP11	21.0	CF/CM/CU48D	1225	42.0	29.5	13.50	11.50
RAC13L42B21S	RGF29100CE20MP11	21.0	CF/CM/CU60C	1225	42.0	29.5	13.75	11.75
RAC13L42B21S	RGF29100CE20MP11	21.0	CF/CM/CU60D	1250	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF29100CE20MP11	21.0	CF/CM64D	1225	42.0	29.5	14.00	12.00
RAC13L42B21S	RGF29120DE20MP11	24.5	CF/CM/CU42D	1250	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF29120DE20MP11	24.5	CF/CM/CU48D	1250	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF29120DE20MP11	24.5	CF/CM/CU60D	1225	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF29120DE20MP11	24.5	CF/CM64D	1225	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF1L080BE12MP11	17.5	CF42B	1175	41.5	28.5	13.00	11.25
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU42C	1200	41.5	29.0	13.50	11.50
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU42D	1400	42.0	31.0	13.25	11.50
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU48C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU48D	1400	42.0	31.0	13.25	11.50
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU48D	1425	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU60C	1200	42.0	29.0	13.75	11.75

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU60C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU60D	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM/CU60D	1425	42.0	31.5	13.50	11.50
RAC13L42B21S	RGF1L080CE16MP11	21.0	CF/CM64D	1200	42.0	29.0	13.75	11.75
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU42C	1200	41.5	29.0	13.50	11.50
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU42D	1400	42.0	31.0	13.25	11.50
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU48C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU48D	1400	42.0	31.0	13.25	11.50
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU48D	1425	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU60C	1200	42.0	29.0	13.75	11.75
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU60C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU60D	1200	42.0	29.0	13.50	11.50
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM/CU60D	1425	42.0	31.5	13.50	11.50
RAC13L42B21S	RGF1L100CE16MP11	21.0	CF/CM64D	1200	42.0	29.0	13.75	11.75
RAC13L42B21S	RGF1L100CE20MP11	21.0	CF/CM/CU42C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF1L100CE20MP11	21.0	CF/CM/CU42D	1275	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF1L100CE20MP11	21.0	CF/CM/CU48C	1275	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF1L100CE20MP11	21.0	CF/CM/CU48D	1300	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF1L100CE20MP11	21.0	CF/CM/CU60C	1275	42.0	30.5	14.00	12.00
RAC13L42B21S	RGF1L100CE20MP11	21.0	CF/CM/CU60D	1275	42.0	30.5	14.00	12.00
RAC13L42B21S	RGF1L100CE20MP11	21.0	CF/CM64D	1275	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF1L120CE20MP11	21.0	CF/CM/CU42C	1400	42.0	31.0	13.50	11.50
RAC13L42B21S	RGF1L120CE20MP11	21.0	CF/CM/CU42D	1275	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF1L120CE20MP11	21.0	CF/CM/CU48C	1275	42.0	30.0	13.75	11.75
RAC13L42B21S	RGF1L120CE20MP11	21.0	CF/CM/CU48D	1300	42.0	30.0	14.00	12.00
RAC13L42B21S	RGF1L120CE20MP11	21.0	CF/CM/CU60C	1275	42.0	30.5	14.00	12.00
RAC13L42B21S	RGF1L120CE20MP11	21.0	CF/CM/CU60D	1275	42.0	30.5	14.00	12.00
RAC13L42B21S	RGF1L120CE20MP11	21.0	CF/CM64D	1275	42.0	30.0	14.00	12.00
RAC13L48B21S	RGF2L080CE16MP11	21.0	CF/CM/CU48C	1400	47.5	35.0	13.75	11.75
RAC13L48B21S	RGF2L080CE16MP11	21.0	CF/CM/CU48D	1400	47.5	35.0	13.75	11.75
RAC13L48B21S	RGF2L080CE16MP11	21.0	CF/CM/CU60C	1400	48.0	34.5	14.00	11.75
RAC13L48B21S	RGF2L080CE16MP11	21.0	CF/CM/CU60D	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF2L080CE16MP11	21.0	CF/CM64D	1400	48.0	35.0	14.25	12.00
RAC13L48B21S	RGF2L100CE16MP11	21.0	CF/CM/CU48C	1400	47.5	35.0	13.75	11.75
RAC13L48B21S	RGF2L100CE16MP11	21.0	CF/CM/CU48D	1400	47.5	35.0	13.75	11.75
RAC13L48B21S	RGF2L100CE16MP11	21.0	CF/CM/CU60C	1400	48.0	34.5	14.00	11.75
RAC13L48B21S	RGF2L100CE16MP11	21.0	CF/CM/CU60D	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF2L100CE16MP11	21.0	CF/CM64D	1400	48.0	35.0	14.25	12.00
RAC13L48B21S	RGF2L100CE20MP11	21.0	CF/CM/CU48C	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF2L100CE20MP11	21.0	CF/CM/CU48D	1300	47.5	33.5	14.25	12.25
RAC13L48B21S	RGF2L100CE20MP11	21.0	CF/CM/CU60C	1450	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF2L100CE20MP11	21.0	CF/CM/CU60D	1475	48.0	35.5	14.25	12.00
RAC13L48B21S	RGF2L100CE20MP11	21.0	CF/CM64D	1450	48.0	35.5	14.25	12.25
RAC13L48B21S	RGF2L120CE20MP11	21.0	CF/CM/CU48C	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF2L120CE20MP11	21.0	CF/CM/CU48D	1300	47.5	33.5	14.25	12.25
RAC13L48B21S	RGF2L120CE20MP11	21.0	CF/CM/CU60C	1450	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF2L120CE20MP11	21.0	CF/CM/CU60D	1475	48.0	35.5	14.25	12.00
RAC13L48B21S	RGF2L120CE20MP11	21.0	CF/CM64D	1450	48.0	35.5	14.25	12.25

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L48B21S	RGF19080CE16MP12	21.0	CF/CM/CU48C	1325	47.0	33.0	13.75	11.75
RAC13L48B21S	RGF19080CE16MP12	21.0	CF/CM/CU48D	1350	47.0	33.0	13.75	11.75
RAC13L48B21S	RGF19080CE16MP12	21.0	CF/CM/CU60C	1325	47.5	33.5	13.75	11.75
RAC13L48B21S	RGF19080CE16MP12	21.0	CF/CM/CU60D	1325	47.5	33.5	13.75	11.75
RAC13L48B21S	RGF19080CE16MP12	21.0	CF/CM64D	1350	48.0	34.0	14.00	11.75
RAC13L48B21S	RGF19100CE16MP12	21.0	CF/CM/CU48C	1325	47.0	33.0	13.75	11.75
RAC13L48B21S	RGF19100CE16MP12	21.0	CF/CM/CU48D	1350	47.0	33.0	13.75	11.75
RAC13L48B21S	RGF19100CE16MP12	21.0	CF/CM/CU60C	1325	47.5	33.5	13.75	11.75
RAC13L48B21S	RGF19100CE16MP12	21.0	CF/CM/CU60D	1325	47.5	33.5	13.75	11.75
RAC13L48B21S	RGF19100CE16MP12	21.0	CF/CM64D	1350	48.0	34.0	14.00	11.75
RAC13L48B21S	RGF19100CE20MP12	21.0	CF/CM/CU48C	1400	47.5	35.0	14.00	11.75
RAC13L48B21S	RGF19100CE20MP12	21.0	CF/CM/CU48D	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF19100CE20MP12	21.0	CF/CM/CU60C	1400	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF19100CE20MP12	21.0	CF/CM/CU60D	1450	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF19100CE20MP12	21.0	CF/CM64D	1400	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF19120DE20MP12	24.5	CF/CM/CU48D	1425	48.0	35.0	14.25	12.00
RAC13L48B21S	RGF19120DE20MP12	24.5	CF/CM/CU60D	1425	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF19120DE20MP12	24.5	CF/CM64D	1400	48.0	34.5	14.50	12.25
RAC13L48B21S	RGF29080CE16MP11	21.0	CF/CM/CU48C	1325	47.0	33.0	13.75	11.75
RAC13L48B21S	RGF29080CE16MP11	21.0	CF/CM/CU48D	1350	47.0	33.0	13.75	11.75
RAC13L48B21S	RGF29080CE16MP11	21.0	CF/CM/CU60C	1325	47.5	33.5	13.75	11.75
RAC13L48B21S	RGF29080CE16MP11	21.0	CF/CM/CU60D	1325	47.5	33.5	13.75	11.75
RAC13L48B21S	RGF29080CE16MP11	21.0	CF/CM64D	1350	48.0	34.0	14.00	11.75
RAC13L48B21S	RGF29100CE16MP11	21.0	CF/CM/CU48C	1325	47.0	33.0	13.75	11.75
RAC13L48B21S	RGF29100CE16MP11	21.0	CF/CM/CU48D	1350	47.0	33.0	13.75	11.75
RAC13L48B21S	RGF29100CE16MP11	21.0	CF/CM/CU60C	1325	47.5	33.5	13.75	11.75
RAC13L48B21S	RGF29100CE16MP11	21.0	CF/CM/CU60D	1325	47.5	33.5	13.75	11.75
RAC13L48B21S	RGF29100CE16MP11	21.0	CF/CM64D	1350	48.0	34.0	14.00	11.75
RAC13L48B21S	RGF29100CE20MP11	21.0	CF/CM/CU48C	1400	47.5	35.0	14.00	11.75
RAC13L48B21S	RGF29100CE20MP11	21.0	CF/CM/CU48D	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF29100CE20MP11	21.0	CF/CM/CU60C	1400	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF29100CE20MP11	21.0	CF/CM/CU60D	1450	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF29100CE20MP11	21.0	CF/CM64D	1400	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF29120DE20MP11	24.5	CF/CM/CU48D	1425	48.0	35.0	14.25	12.00
RAC13L48B21S	RGF29120DE20MP11	24.5	CF/CM/CU60D	1425	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF29120DE20MP11	24.5	CF/CM64D	1400	48.0	34.5	14.50	12.25
RAC13L48B21S	RGF1L080CE16MP11	21.0	CF/CM/CU48C	1400	47.5	35.0	13.75	11.75
RAC13L48B21S	RGF1L080CE16MP11	21.0	CF/CM/CU48D	1400	47.5	35.0	13.75	11.75
RAC13L48B21S	RGF1L080CE16MP11	21.0	CF/CM/CU60C	1400	48.0	34.5	14.00	11.75
RAC13L48B21S	RGF1L080CE16MP11	21.0	CF/CM/CU60D	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF1L080CE16MP11	21.0	CF/CM64D	1400	48.0	35.0	14.25	12.00
RAC13L48B21S	RGF1L100CE16MP11	21.0	CF/CM/CU48C	1400	47.5	35.0	13.75	11.75
RAC13L48B21S	RGF1L100CE16MP11	21.0	CF/CM/CU48D	1400	47.5	35.0	13.75	11.75
RAC13L48B21S	RGF1L100CE16MP11	21.0	CF/CM/CU60C	1400	48.0	34.5	14.00	11.75
RAC13L48B21S	RGF1L100CE16MP11	21.0	CF/CM/CU60D	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF1L100CE16MP11	21.0	CF/CM64D	1400	48.0	35.0	14.25	12.00
RAC13L48B21S	RGF1L100CE20MP11	21.0	CF/CM/CU48C	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF1L100CE20MP11	21.0	CF/CM/CU48D	1300	47.5	33.5	14.25	12.25

For notes see Page 21.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L48B21S	RGF1L100CE20MP11	21.0	CF/CM/CU60C	1450	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF1L100CE20MP11	21.0	CF/CM/CU60D	1475	48.0	35.5	14.25	12.00
RAC13L48B21S	RGF1L100CE20MP11	21.0	CF/CM64D	1450	48.0	35.5	14.25	12.25
RAC13L48B21S	RGF1L120CE20MP11	21.0	CF/CM/CU48C	1425	48.0	35.0	14.00	11.75
RAC13L48B21S	RGF1L120CE20MP11	21.0	CF/CM/CU48D	1300	47.5	33.5	14.25	12.25
RAC13L48B21S	RGF1L120CE20MP11	21.0	CF/CM/CU60C	1450	48.0	35.0	14.25	12.25
RAC13L48B21S	RGF1L120CE20MP11	21.0	CF/CM/CU60D	1475	48.0	35.5	14.25	12.00
RAC13L48B21S	RGF1L120CE20MP11	21.0	CF/CM64D	1450	48.0	35.5	14.25	12.25
RAC13L60B21S	RGF2L100CE20MP11	21.0	CF/CM/CU60C	1625	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF2L100CE20MP11	21.0	CF/CM/CU60D	1650	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF2L100CE20MP11	21.0	CF/CM64D	1625	56.5	40.0	13.50	11.25
RAC13L60B21S	RGF2L120CE20MP11	21.0	CF/CM/CU60C	1625	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF2L120CE20MP11	21.0	CF/CM/CU60D	1650	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF2L120CE20MP11	21.0	CF/CM64D	1625	56.5	40.0	13.50	11.25
RAC13L60B21S	RGF19100CE20MP12	21.0	CF/CM/CU60D	1625	55.5	39.5	13.25	11.25
RAC13L60B21S	RGF19120DE20MP12	24.5	CF/CM/CU60D	1625	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF29100CE20MP11	21.0	CF/CM/CU60D	1625	55.5	39.5	13.25	11.25
RAC13L60B21S	RGF29120DE20MP11	24.5	CF/CM/CU60D	1625	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF1L100CE20MP11	21.0	CF/CM/CU60C	1625	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF1L100CE20MP11	21.0	CF/CM/CU60D	1650	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF1L100CE20MP11	21.0	CF/CM64D	1625	56.5	40.0	13.50	11.25
RAC13L60B21S	RGF1L120CE20MP11	21.0	CF/CM/CU60C	1625	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF1L120CE20MP11	21.0	CF/CM/CU60D	1650	56.0	39.5	13.25	11.25
RAC13L60B21S	RGF1L120CE20MP11	21.0	CF/CM64D	1625	56.5	40.0	13.50	11.25

For rated condition information, see the footnotes below the System Capacity - Single Piece and Modular Air Handlers table.

1. High Efficiency Motor Furnaces have B.O.D (Blower on Delay) standard.

2. CM coils available with a factory installed horizontal drain pan. See price pages for specific model number.

Furnaces that are listed individually in the above table, such as the RGF1L*P, RGF19*P, and RGF1L*E use Coil Only Ratings.

APPLICATIONS AND ACCESSORIES

Refer to Price Manual for specific model numbers.

Standard Application Limits*		
Maximum Lineset Equivalent Length		80 Ft
Outdoor Ambient Temperature Limits		
Cooling Operation	Maximum DB	115°F
	Minimum DB	55°F

* For Low Ambient and/or Long Lineset Applications, please see the accessories listed below.

Non-Standard Lineset Applications - For installations with reduced diameter or long linesets, refer to the current version of the Piping Application Guide P/N 247077, available in the Application Bulletins section on www.upgnet.com.

OD Unit Anti Short Cycle Kit (10 Pack) S1-2TD08700124BK: A time delay that prevents rapid compressor restarting as a result of power interruption, limit switch operation, or thermostat resetting. Not required for HP models, or for AC models with factory electronic controls.

Standard Low Ambient Control Kit S1-2LA06700424: Allows the use of air conditioning at low outdoor ambient temperatures down to +20°F (-7°C). For use with all R-410A single stage AC & HP models.

Advanced Low Ambient Control Kit S1-2LA04701024: Contains the necessary components and controls to allow cooling operation down to -20°F (-29°C). For use with all R-410A single stage AC & HP models.

Low Pressure Switch Kit S1-2PS06700524: Provides field installed low pressure (loss of charge) protection. Not required for HP models, or for AC models with factory electronic controls.

High Ambient Condenser Fan Motor S1-FHM**HT:** Class F 70°C motor to allow cooling operation up to 160°F air entering the condenser. For use with all R-410A single stage AC & HP models containing R-410A refrigerant only.

Outdoor Communicating Board Kit (S1-33102952310): Electronic control upgrade for standard AC & HP units to provide compatibility with the Residential Touch Screen Communicating Control.

Start Assist Kit S1-2SA067**:** Provides increased compressor starting torque for areas with low supply voltage. Required for units with recip compressors when applied with indoor TXV, and for all units when applied with long linesets or low ambient kits. May be factory installed on select AC & HP units (see Physical & Electrical Table). See Price Pages or Source1 SmartSearch for the correct kit for each application.

Compressor Crankcase Heater Kit (S1-025-**-***):** A wrap-around electrical resistance heater that warms the compressor sump, reducing the chance of liquid slugging on startup. Required on all long lineset and low ambient applications. See Price Pages or Source1 SmartSearch for the correct part for each application.

Indoor Blower-Off Delay Kit S1-2FD06700224: Provides a 1-minute blower-off delay at the end of the cooling cycle. May be required for retrofits with non-Johnson Controls Unitary Products indoor units. This feature is factory-provided on all JCUP indoor products.

Support Feet S1-HPRKIT-:** Kit of support feet to raise unit above snow or landscaping. Available in heights of 3", 6" or 12".

Anchor Bracket Kit S1-1HK0401: Firmly anchors unit to pad or support structure. When properly installed, approved for ground-mounted or roof-mounted applications.

Indoor TXV Kit S1-1TVM*:** Thermal expansion valves precisely meter refrigerant for optimum performance over a wide range of conditions. See System Charge Table, Price Pages, or Source1 Smart Search for TXV part number for each AC & HP model.

Wall Mount Kit (S1-ACB-):** Includes two brackets to allow outdoor unit to be securely mounted to a vertical wall. Mounting hardware is field sourced according to the specific application.

Winter Cover Kit S1-CCVRE*:** Custom fit winter cover protects AC condensing unit from debris during the off-season. Must be removed prior to unit operation. See Price Pages or Source1 SmartSearch for the correct cover for each application.

Cold Weather Charging Tent S1-CHGTENT01: Provides warm environment to accurately service AC & HP systems in ambient conditions 55°F (13°C) or colder.

Touch-up Paint S1-5130153**:** Color matched aerosol paint for touching up unit chassis and panels. See Price Pages or Source1 SmartSearch for the correct color for each application.

Compressor Sound Blanket S1-010-07xxx-000: A field installed dense foam cover that provides 2dBA sound level reduction. See Price Pages or Source1 SmartSearch for the correct blanket for each application.


Thermostat - Compatible thermostat controls are available through accessory sourcing. For optimum performance, these outdoor units are fully compatible with our residential touch screen thermostat with proprietary (patent-pending) hexagon interface. For more information, see the thermostat section of the Product Equipment Catalog.

SOUND POWER RATINGS

Cooling	Octave Band Sound Power Level (db re. 1-pW)									
Model Number	63	125	250	500	1000	2000	4000	8000	dBA	SQI
RAC13L18B21S	69.0	72.1	68.2	72.2	70.3	64.9	64.3	59.4	75.0	19.2
RAC13L24B21S	69.6	70.6	69.7	74.4	70.7	66.5	64.8	61.2	76.0	19.1
RAC13L30B21S	69.2	69.9	71.2	74.0	70.3	67.1	65.6	60.8	75.0	19.2
RAC13L36B21S	67.2	66.9	65.0	68.2	70.1	62.9	61.2	58.6	73.0	19.1
RAC13L42B21S	66.2	67.5	69.4	72.8	71.0	68.6	62.8	59.9	76.0	19.1
RAC13L48B21S	73.0	75.7	70.3	72.0	72.8	65.8	60.8	55.9	76.0	19.1
RAC13L60B21S	74.6	74.8	71.3	72.5	72.6	68.3	64.9	66.9	77.0	19.0


Rated in accordance with ARI Standard 270.

TYPICAL INSTALLATION

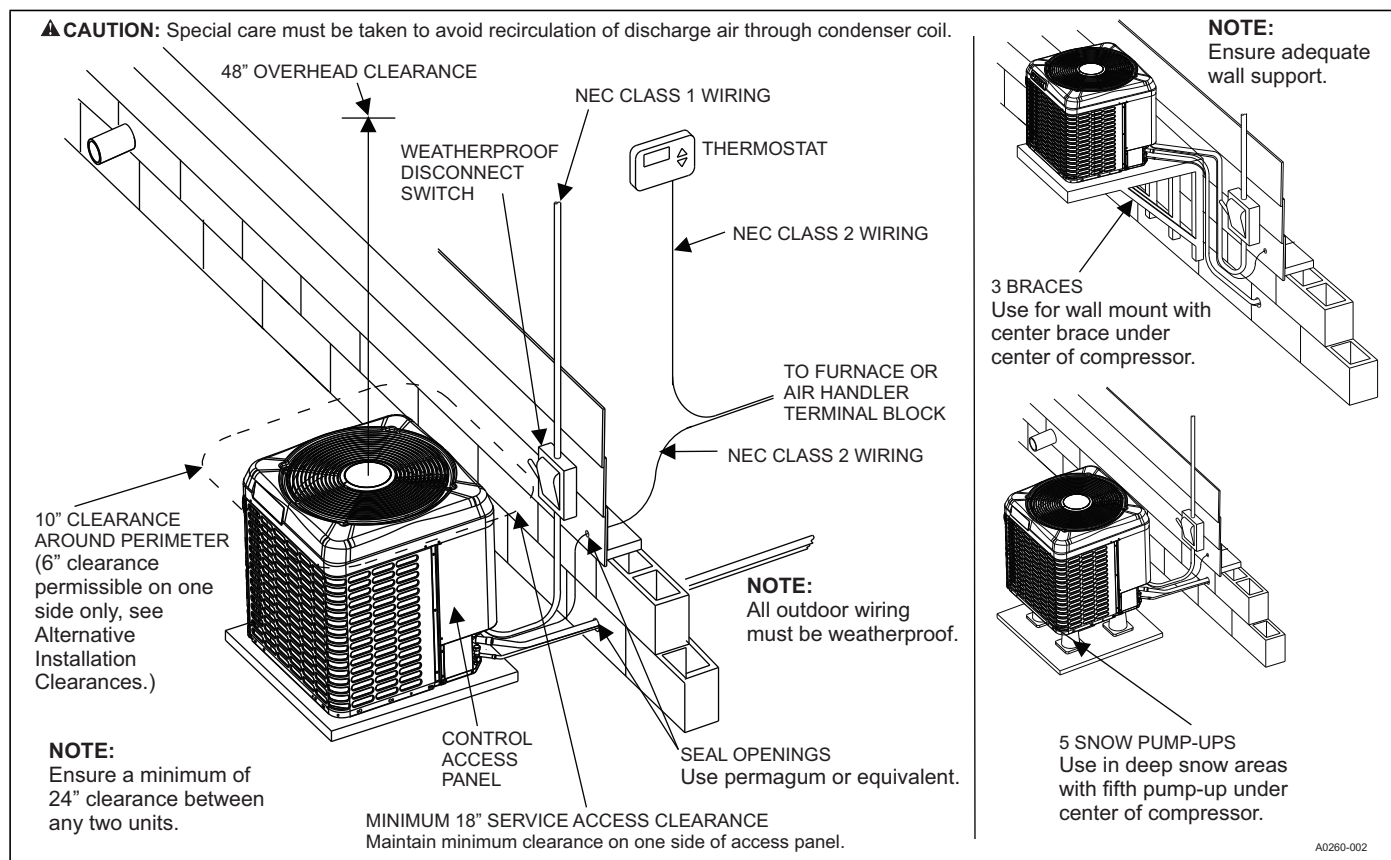


⚠ CAUTION


Care must be taken to prevent ice from damaging the unit. Damage may occur from ice falling onto unit from a sloped roof or from a vertical drip line due to a partial overhang.

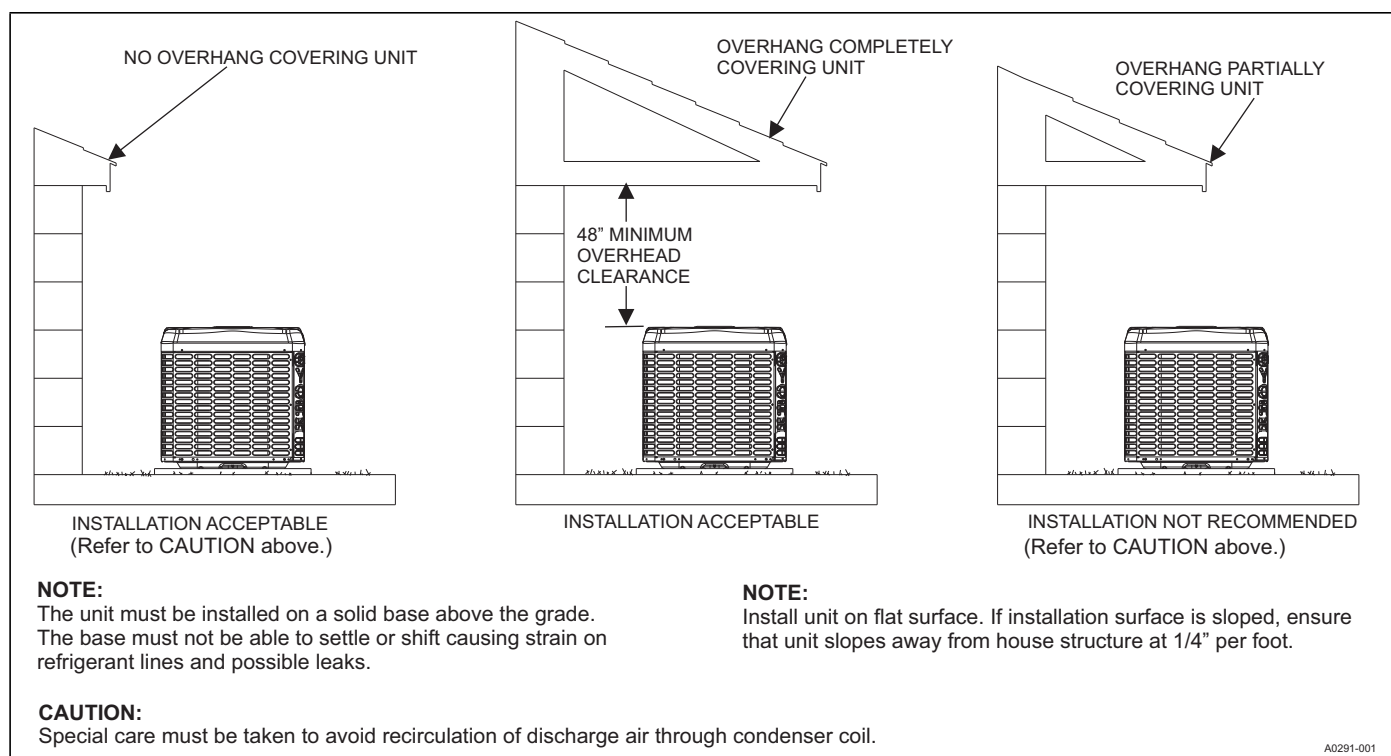

TYPICAL FIELD WIRING

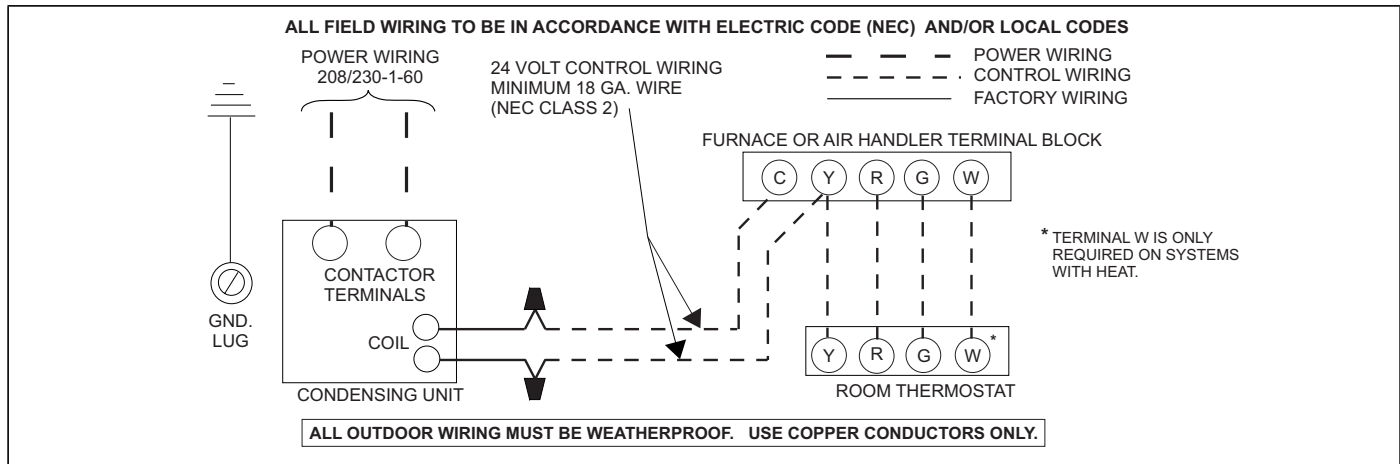

ALTERNATIVE INSTALLATION CLEARANCES

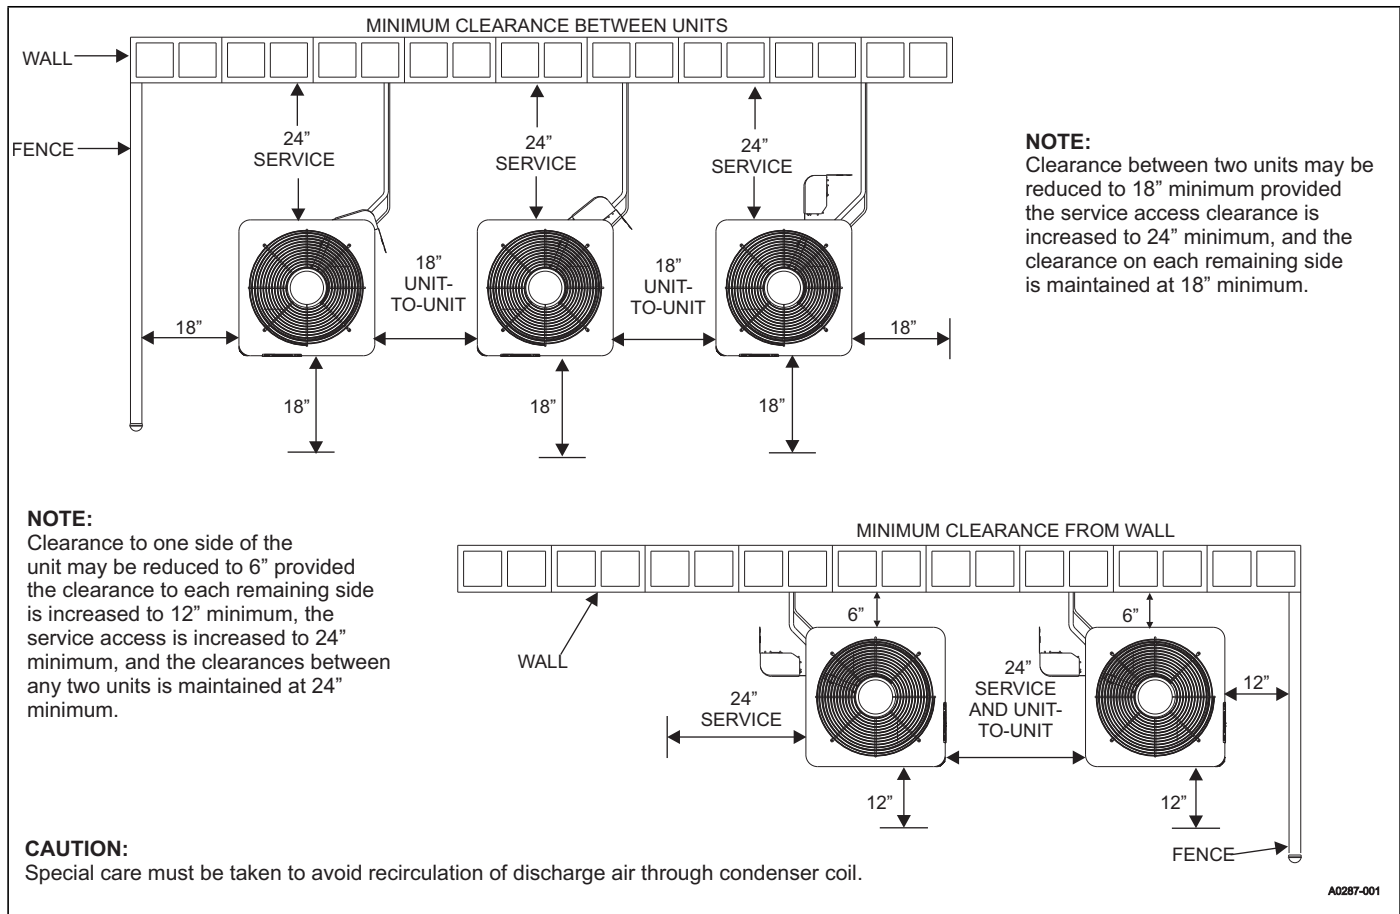

PERFORMANCE DATA - 1.5 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION @ COMPRESSOR		Outdoor Ambient Temperature													
			55 °F		65 °F		75 °F		85 °F		95 °F		105 °F		115 °F	
	T (°F)	P (PSIG)	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW
RAC13L18B21S	35	107	17.7	0.93	16.3	1.02	14.6	1.10	12.7	1.17	10.9	1.21	9.1	1.24	7.4	1.25
	40	119	20.3	0.91	18.7	1.02	16.8	1.11	14.8	1.19	12.7	1.25	10.7	1.29	8.8	1.32
	45	130	23.2	0.89	21.4	1.01	19.3	1.12	17.1	1.21	14.8	1.28	12.6	1.34	10.5	1.38
	50	143	26.4	0.87	24.3	1.00	22.0	1.11	19.6	1.22	17.1	1.30	14.7	1.37	12.3	1.43
	55	156	29.7	0.84	27.4	0.98	25.0	1.10	22.4	1.22	19.7	1.31	16.9	1.40	14.4	1.47

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L18B21S													
INDOOR COIL MODEL NO.			CF18AXA1													
AIR TEMP. ENTERING OUTDOOR UNIT (°F)	ID CFM	450					600					750				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	16.6	17.3	17.2	17.8	17.7	16.1	17.9	17.5	18.1	17.9	15.6	18.4	17.8	18.4	18.1
	S.C.	16.1	13.6	12.1	11.6	9.2	15.8	14.4	12.7	12.1	9.6	15.5	15.2	13.2	12.6	10.0
	KW	1.16	1.16	1.16	1.16	1.17	1.21	1.22	1.21	1.22	1.23	1.27	1.28	1.27	1.28	1.29
65	T.C.	16.4	17.4	17.4	18.3	18.5	16.7	18.1	17.9	18.7	18.8	17.0	18.7	18.3	19.0	19.1
	S.C.	16.1	14.1	12.5	12.0	9.6	16.5	15.2	13.3	12.7	10.0	16.9	16.4	14.2	13.3	10.5
	KW	1.24	1.25	1.24	1.25	1.25	1.30	1.31	1.30	1.31	1.31	1.36	1.37	1.36	1.37	1.37
75	T.C.	16.2	17.6	17.7	18.9	19.4	17.3	18.3	18.2	19.3	19.7	18.5	19.1	18.8	19.7	20.1
	S.C.	16.1	14.6	12.8	12.4	9.9	17.2	16.1	14.0	13.2	10.5	18.3	17.5	15.1	14.0	11.0
	KW	1.32	1.33	1.33	1.34	1.33	1.39	1.40	1.39	1.40	1.39	1.45	1.46	1.44	1.46	1.45
85	T.C.	15.0	16.0	16.0	17.7	19.0	16.3	17.1	16.8	18.4	19.4	17.6	18.2	17.5	19.1	19.8
	S.C.	14.9	14.1	12.1	12.0	9.8	16.2	15.7	13.6	13.3	10.6	17.4	17.4	15.1	14.5	11.4
	KW	1.42	1.43	1.42	1.43	1.43	1.48	1.49	1.48	1.49	1.49	1.55	1.55	1.54	1.56	1.56
95	T.C.	13.8	14.5	14.4	16.5	18.7	15.2	15.9	15.3	17.5	19.1	16.6	17.3	16.2	18.5	19.6
	S.C.	13.7	13.5	11.4	11.6	9.7	15.1	15.4	13.2	13.3	10.7	16.5	17.2	15.0	15.0	11.7
	KW	1.51	1.52	1.51	1.52	1.53	1.58	1.58	1.57	1.59	1.60	1.65	1.65	1.63	1.66	1.66
105	T.C.	12.3	12.8	12.2	14.3	16.8	13.5	14.1	13.1	15.2	17.4	14.7	15.5	14.0	16.2	18.1
	S.C.	12.2	12.1	10.4	10.8	9.0	13.4	13.7	11.9	12.6	10.1	14.6	15.4	13.4	14.4	11.3
	KW	1.59	1.60	1.58	1.61	1.64	1.67	1.67	1.65	1.68	1.70	1.74	1.74	1.72	1.75	1.77
115	T.C.	10.8	11.0	9.9	12.0	14.9	11.8	12.4	10.8	13.0	15.7	12.7	13.7	11.8	13.9	16.5
	S.C.	10.6	10.6	9.3	9.9	8.3	11.6	12.1	10.5	11.9	9.6	12.6	13.5	11.7	13.8	10.8
	KW	1.67	1.68	1.64	1.70	1.74	1.76	1.76	1.72	1.78	1.81	1.84	1.84	1.81	1.85	1.87
NOTE: ALL CAPACITIES INCLUDE INDOOR FAN HEAT. KW VALUES ARE FOR THE SYSTEM (OUTDOOR + INDOOR).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections.

NOTE: For dry bulb temperatures different than those listed (between 73-87 °F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 1.5 TON

Air Handler	Coil	T.C.	S.C.	KW
–	CF/CM/CU18A	1.00	1.00	1.00
–	CF/CM/CU18B	1.00	1.00	1.00
–	CF/CM/CU24A	1.03	1.04	1.03
–	CF/CM/CU24B	1.03	1.04	1.03
–	CF/CM/CU24C	1.03	1.04	1.03
–	CF/CM/CU30A	1.03	1.05	1.01
–	CF/CM/CU30B	1.03	1.05	1.01
–	CF/CM/CU30C	1.03	1.05	1.01
–	CF/CM/CU30D	1.03	1.05	1.01
–	CF/CM/CU36B	1.03	1.02	1.01
–	CF/CM/CU36C	1.03	1.02	1.01
–	CF/CM/CU36D	1.03	1.02	1.01
–	CF/CM36A	1.03	1.02	1.01
RFCX18BE06MP22	–	1.03	1.04	0.89
RFCX24BE08MP22	–	1.03	1.04	0.89
RFCX30BE10MP22	–	1.03	1.05	0.89
RFCX36BE12MP22	–	1.03	1.05	0.91
RFCX36CE12MP22	–	1.03	1.02	0.92
RFCX18BP06MP22	–	1.03	1.04	0.98
RFCX24BP08MP22	–	1.03	1.04	1.01
RFCX30BP10MP22	–	1.03	1.02	0.98

FURNACE MULTIPLIERS - 1.5 TON

Furnaces	Coil	T.C.	S.C.	KW
RGF2L060AE12MP11	CF/CM/CU18A	1.03	1.04	0.92
RGF2L060AE12MP11	CF/CM/CU24A	1.03	1.08	0.89
RGF2L060AE12MP11	CF/CM/CU30A	1.03	1.05	0.91
RGF2L060AE12MP11	CF/CM36A	1.03	1.04	0.91
RGF2L080BE12MP11	CF/CM/CU18B	1.03	1.04	0.92
RGF2L080BE12MP11	CF/CM/CU24B	1.03	1.04	0.91
RGF2L080BE12MP11	CF/CM/CU30B	1.03	1.05	0.91
RGF2L080BE12MP11	CF/CM/CU36B	1.03	1.04	0.91
RGF2L080CE16MP11	CF/CM/CU24C	1.03	1.04	0.92
RGF2L080CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF2L080CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF2L080CE16MP11	CF/CM/CU36C	1.03	1.03	0.91
RGF2L080CE16MP11	CF/CM/CU36D	1.03	1.05	0.91
RGF2L100CE16MP11	CF/CM/CU24C	1.03	1.04	0.92
RGF2L100CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF2L100CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF2L100CE16MP11	CF/CM/CU36C	1.03	1.03	0.91
RGF2L100CE16MP11	CF/CM/CU36D	1.03	1.05	0.91
RGF19060BE12MP12	CF/CM/CU18B	1.03	1.04	0.92
RGF19060BE12MP12	CF/CM/CU24B	1.03	1.04	0.92
RGF19060BE12MP12	CF/CM/CU30B	1.03	1.05	0.92
RGF19060BE12MP12	CF/CM/CU36B	1.03	1.03	0.91
RGF19080BE12MP12	CF/CM/CU18B	1.03	1.04	0.92
RGF19080BE12MP12	CF/CM/CU24B	1.03	1.04	0.92
RGF19080BE12MP12	CF/CM/CU30B	1.03	1.05	0.92
RGF19080BE12MP12	CF/CM/CU36B	1.03	1.03	0.91
RGF19080CE16MP12	CF/CM/CU24C	1.03	1.04	0.91
RGF19080CE16MP12	CF/CM/CU30C	1.03	1.05	0.91
RGF19080CE16MP12	CF/CM/CU30D	1.03	1.05	0.91
RGF19080CE16MP12	CF/CM/CU36C	1.03	1.04	0.89
RGF19080CE16MP12	CF/CM/CU36D	1.03	1.04	0.89

FURNACE MULTIPLIERS - 1.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF19100CE16MP12	CF/CM/CU24C	1.03	1.04	0.91
RGF19100CE16MP12	CF/CM/CU30C	1.03	1.05	0.91
RGF19100CE16MP12	CF/CM/CU30D	1.03	1.05	0.91
RGF19100CE16MP12	CF/CM/CU36C	1.03	1.04	0.89
RGF19100CE16MP12	CF/CM/CU36D	1.03	1.04	0.89
RGF19100CE20MP12	CF/CM/CU24C	1.03	1.05	0.98
RGF19100CE20MP12	CF/CM/CU30C	1.03	1.05	0.96
RGF19100CE20MP12	CF/CM/CU30D	1.03	1.07	0.96
RGF19100CE20MP12	CF/CM/CU36C	1.03	1.05	0.96
RGF19100CE20MP12	CF/CM/CU36D	1.03	1.07	0.96
RGF19120DE20MP12	CF/CM/CU30D	1.03	1.05	0.96
RGF19120DE20MP12	CF/CM/CU36D	1.03	1.02	0.96
RGF29060BE12MP11	CF/CM/CU18B	1.03	1.04	0.92
RGF29060BE12MP11	CF/CM/CU24B	1.03	1.04	0.92
RGF29060BE12MP11	CF/CM/CU30B	1.03	1.05	0.92
RGF29060BE12MP11	CF/CM/CU36B	1.03	1.03	0.91
RGF29080BE12MP11	CF/CM/CU18B	1.03	1.04	0.92
RGF29080BE12MP11	CF/CM/CU24B	1.03	1.04	0.92
RGF29080BE12MP11	CF/CM/CU30B	1.03	1.05	0.92
RGF29080BE12MP11	CF/CM/CU36B	1.03	1.03	0.91
RGF29080CE16MP11	CF/CM/CU24C	1.03	1.04	0.91
RGF29080CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF29080CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF29080CE16MP11	CF/CM/CU36C	1.03	1.04	0.89
RGF29080CE16MP11	CF/CM/CU36D	1.03	1.04	0.89
RGF29100CE16MP11	CF/CM/CU24C	1.03	1.04	0.91
RGF29100CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF29100CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF29100CE16MP11	CF/CM/CU36C	1.03	1.04	0.89
RGF29100CE16MP11	CF/CM/CU36D	1.03	1.04	0.89
RGF29100CE20MP11	CF/CM/CU24C	1.03	1.05	0.98
RGF29100CE20MP11	CF/CM/CU30C	1.03	1.05	0.96
RGF29100CE20MP11	CF/CM/CU30D	1.03	1.07	0.96
RGF29100CE20MP11	CF/CM/CU36C	1.03	1.05	0.96
RGF29100CE20MP11	CF/CM/CU36D	1.03	1.07	0.96
RGF29120DE20MP11	CF/CM/CU30D	1.03	1.05	0.96
RGF29120DE20MP11	CF/CM/CU36D	1.03	1.02	0.96
RGF1L060AE12MP11	CF/CM/CU18A	1.03	1.04	0.92
RGF1L060AE12MP11	CF/CM/CU24A	1.03	1.08	0.89
RGF1L060AE12MP11	CF/CM/CU30A	1.03	1.05	0.91
RGF1L060AE12MP11	CF/CM36A	1.03	1.04	0.91
RGF1L080BE12MP11	CF/CM/CU18B	1.03	1.04	0.92
RGF1L080BE12MP11	CF/CM/CU24B	1.03	1.04	0.91
RGF1L080BE12MP11	CF/CM/CU30B	1.03	1.05	0.91
RGF1L080BE12MP11	CF/CM/CU36B	1.03	1.04	0.91
RGF1L080CE16MP11	CF/CM/CU24C	1.03	1.04	0.92
RGF1L080CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF1L080CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF1L080CE16MP11	CF/CM/CU36C	1.03	1.03	0.91
RGF1L080CE16MP11	CF/CM/CU36D	1.03	1.05	0.91
RGF1L100CE16MP11	CF/CM/CU24C	1.03	1.04	0.92
RGF1L100CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF1L100CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF1L100CE16MP11	CF/CM/CU36C	1.03	1.03	0.91
RGF1L100CE16MP11	CF/CM/CU36D	1.03	1.05	0.91

PERFORMANCE DATA - 2 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION @ COMPRESSOR		Outdoor Ambient Temperature													
			55 °F		65 °F		75 °F		85 °F		95 °F		105 °F		115 °F	
	T (°F)	P (PSIG)	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW
RAC13L24B21S	35	107	25.2	1.25	22.9	1.38	20.7	1.50	18.4	1.62	16.2	1.71	13.9	1.78	11.7	1.82
	40	119	28.3	1.23	25.9	1.37	23.5	1.51	21.0	1.65	18.6	1.77	16.2	1.86	13.8	1.93
	45	130	31.5	1.20	28.9	1.36	26.3	1.52	23.8	1.67	21.2	1.81	18.6	1.93	16.0	2.02
	50	143	34.8	1.16	32.1	1.34	29.4	1.52	26.6	1.69	23.9	1.84	21.1	1.98	18.3	2.10
	55	156	38.4	1.12	35.4	1.32	32.5	1.51	29.6	1.70	26.7	1.87	23.8	2.03	20.8	2.17

Notes:

1. For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
2. Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - a. Increase capacity by 1% for each 2°F increase in subcooling.
 - b. Decrease capacity by 1% for each 2°F decrease in subcooling.
3. Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L24B21S													
INDOOR COIL MODEL NO.			CF24AXA1													
AIR TEMP. ENTERING OUTDOOR UNIT (°F)	ID CFM	600					800					1000				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	22.9	25.0	25.2	29.4	27.7	24.2	26.0	26.3	28.6	27.6	25.4	26.9	27.3	28.4	27.4
	S.C.	22.0	19.2	15.0	22.6	13.6	23.2	21.3	17.9	19.4	14.2	24.2	23.3	20.8	19.3	14.9
	KW	1.48	1.49	1.48	1.49	1.49	1.56	1.57	1.56	1.57	1.57	1.63	1.65	1.63	1.64	1.65
65	T.C.	22.1	23.8	24.5	27.0	27.1	23.8	25.1	25.6	27.3	27.2	25.5	26.2	26.8	27.6	27.4
	S.C.	21.2	18.9	15.9	18.0	13.5	22.9	21.2	18.3	18.5	14.2	24.4	23.5	20.8	19.3	14.9
	KW	1.61	1.63	1.62	1.63	1.63	1.69	1.71	1.69	1.71	1.71	1.77	1.79	1.77	1.79	1.79
75	T.C.	21.3	22.7	23.7	25.2	26.6	23.5	24.2	24.9	26.0	26.9	25.6	25.6	26.1	26.8	27.2
	S.C.	20.6	18.6	16.8	16.4	13.4	22.5	21.0	18.8	17.9	14.2	24.3	23.4	20.7	19.4	14.9
	KW	1.73	1.77	1.75	1.77	1.77	1.82	1.85	1.83	1.85	1.85	1.91	1.93	1.91	1.93	1.93
85	T.C.	20.1	20.8	22.1	23.9	25.5	22.1	22.5	22.9	24.8	25.8	24.0	24.2	23.7	25.7	26.2
	S.C.	19.2	17.7	16.1	15.9	13.0	21.0	20.3	18.0	17.6	13.9	22.8	22.8	20.0	19.3	14.8
	KW	1.86	1.88	1.87	1.91	1.93	1.96	1.97	1.96	2.00	2.01	2.05	2.06	2.05	2.08	2.09
95	T.C.	18.8	19.0	20.6	22.8	24.4	20.5	20.9	21.0	23.6	24.9	22.1	22.9	21.3	24.4	25.3
	S.C.	17.8	16.9	15.3	15.5	12.6	19.6	19.6	17.2	17.4	13.7	21.3	22.2	19.2	19.3	14.8
	KW	1.98	2.00	1.99	2.05	2.08	2.09	2.10	2.09	2.15	2.17	2.20	2.20	2.18	2.24	2.25
105	T.C.	17.5	16.7	17.8	20.4	22.7	19.0	18.5	18.4	21.3	23.0	20.6	20.4	19.0	22.3	23.4
	S.C.	16.6	15.6	14.2	14.6	12.0	18.1	17.6	16.0	16.5	13.2	19.7	19.7	17.7	18.6	14.3
	KW	2.10	2.11	2.10	2.17	2.22	2.22	2.22	2.20	2.27	2.31	2.34	2.32	2.30	2.36	2.41
115	T.C.	16.2	14.4	15.1	18.1	20.9	17.7	16.2	15.9	19.1	21.2	18.9	17.9	16.7	20.1	21.4
	S.C.	15.3	14.1	13.2	13.6	11.5	16.6	15.6	14.7	15.8	12.7	18.0	17.2	16.3	17.9	13.8
	KW	2.23	2.21	2.20	2.29	2.36	2.35	2.33	2.31	2.39	2.46	2.48	2.45	2.41	2.49	2.57
NOTE: ALL CAPACITIES INCLUDE INDOOR FAN HEAT. KW VALUES ARE FOR THE SYSTEM (OUTDOOR + INDOOR).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections.

NOTE: For dry bulb temperatures different than those listed (between 73-87 °F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 2 TON

Air Handler	Coil	T.C.	S.C.	KW
–	CF/CM/CU24A	1.00	1.00	1.00
–	CF/CM/CU24B	1.00	1.00	1.00
–	CF/CM/CU24C	1.00	1.00	1.00
–	CF/CM/CU30A	1.02	1.02	1.02
–	CF/CM/CU30B	1.02	1.02	1.02
–	CF/CM/CU30C	1.02	1.02	1.02
–	CF/CM/CU30D	1.02	1.02	1.02
–	CF/CM/CU36B	1.02	1.00	1.02
–	CF/CM/CU36C	1.02	1.00	1.02
–	CF/CM/CU36D	1.02	1.00	1.02
–	CF/CM/CU42C	1.02	1.01	0.99
–	CF/CM/CU42D	1.02	1.01	0.99
–	CF/CM36A	1.02	1.00	1.02
–	CF42B	1.02	1.01	0.99
RFCX24BE08MP22	–	1.02	1.02	0.93
RFCX30BE10MP22	–	1.02	1.02	0.91
RFCX36BE12MP22	–	1.02	1.02	0.91
RFCX36CE12MP22	–	1.02	1.02	0.89
RFCX24BP08MP22	–	1.01	1.00	1.01
RFCX30BP10MP22	–	1.02	1.01	0.97
RFCX36BP12MP22	–	1.02	1.06	0.99
RFCX36CP12MP22	–	1.02	1.03	0.99

FURNACE MULTIPLIERS - 2 TON

Furnaces	Coil	T.C.	S.C.	KW
RGF2L060AE12MP11	CF/CM/CU18A	1.03	1.04	0.92
RGF2L060AE12MP11	CF/CM/CU24A	1.03	1.08	0.89
RGF2L060AE12MP11	CF/CM/CU30A	1.03	1.05	0.91
RGF2L060AE12MP11	CF/CM36A	1.03	1.04	0.91
RGF2L080BE12MP11	CF/CM/CU18B	1.03	1.04	0.92
RGF2L080BE12MP11	CF/CM/CU24B	1.03	1.04	0.91
RGF2L080BE12MP11	CF/CM/CU30B	1.03	1.05	0.91
RGF2L080BE12MP11	CF/CM/CU36B	1.03	1.04	0.91
RGF2L080CE16MP11	CF/CM/CU24C	1.03	1.04	0.92
RGF2L080CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF2L080CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF2L080CE16MP11	CF/CM/CU36C	1.03	1.03	0.91
RGF2L080CE16MP11	CF/CM/CU36D	1.03	1.05	0.91
RGF2L100CE16MP11	CF/CM/CU24C	1.03	1.04	0.92
RGF2L100CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF2L100CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF2L100CE16MP11	CF/CM/CU36C	1.03	1.03	0.91
RGF2L100CE16MP11	CF/CM/CU36D	1.03	1.05	0.91
RGF19060BE12MP12	CF/CM/CU18B	1.03	1.04	0.92
RGF19060BE12MP12	CF/CM/CU24B	1.03	1.04	0.92
RGF19060BE12MP12	CF/CM/CU30B	1.03	1.05	0.92
RGF19060BE12MP12	CF/CM/CU36B	1.03	1.03	0.91
RGF19080BE12MP12	CF/CM/CU18B	1.03	1.04	0.92
RGF19080BE12MP12	CF/CM/CU24B	1.03	1.04	0.92
RGF19080BE12MP12	CF/CM/CU30B	1.03	1.05	0.92
RGF19080BE12MP12	CF/CM/CU36B	1.03	1.03	0.91
RGF19080CE16MP12	CF/CM/CU24C	1.03	1.04	0.91
RGF19080CE16MP12	CF/CM/CU30C	1.03	1.05	0.91
RGF19080CE16MP12	CF/CM/CU30D	1.03	1.05	0.91
RGF19080CE16MP12	CF/CM/CU36C	1.03	1.04	0.89
RGF19080CE16MP12	CF/CM/CU36D	1.03	1.04	0.89

FURNACE MULTIPLIERS - 2 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF19100CE16MP12	CF/CM/CU24C	1.03	1.04	0.91
RGF19100CE16MP12	CF/CM/CU30C	1.03	1.05	0.91
RGF19100CE16MP12	CF/CM/CU30D	1.03	1.05	0.91
RGF19100CE16MP12	CF/CM/CU36C	1.03	1.04	0.89
RGF19100CE16MP12	CF/CM/CU36D	1.03	1.04	0.89
RGF19100CE20MP12	CF/CM/CU24C	1.03	1.05	0.98
RGF19100CE20MP12	CF/CM/CU30C	1.03	1.05	0.96
RGF19100CE20MP12	CF/CM/CU30D	1.03	1.07	0.96
RGF19100CE20MP12	CF/CM/CU36C	1.03	1.05	0.96
RGF19100CE20MP12	CF/CM/CU36D	1.03	1.07	0.96
RGF19120DE20MP12	CF/CM/CU30D	1.03	1.05	0.96
RGF19120DE20MP12	CF/CM/CU36D	1.03	1.02	0.96
RGF29060BE12MP11	CF/CM/CU18B	1.03	1.04	0.92
RGF29060BE12MP11	CF/CM/CU24B	1.03	1.04	0.92
RGF29060BE12MP11	CF/CM/CU30B	1.03	1.05	0.92
RGF29060BE12MP11	CF/CM/CU36B	1.03	1.03	0.91
RGF29080BE12MP11	CF/CM/CU18B	1.03	1.04	0.92
RGF29080BE12MP11	CF/CM/CU24B	1.03	1.04	0.92
RGF29080BE12MP11	CF/CM/CU30B	1.03	1.05	0.92
RGF29080BE12MP11	CF/CM/CU36B	1.03	1.03	0.91
RGF29080CE16MP11	CF/CM/CU24C	1.03	1.04	0.91
RGF29080CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF29080CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF29080CE16MP11	CF/CM/CU36C	1.03	1.04	0.89
RGF29080CE16MP11	CF/CM/CU36D	1.03	1.04	0.89
RGF29100CE16MP11	CF/CM/CU24C	1.03	1.04	0.91
RGF29100CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF29100CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF29100CE16MP11	CF/CM/CU36C	1.03	1.04	0.89
RGF29100CE16MP11	CF/CM/CU36D	1.03	1.04	0.89
RGF29100CE20MP11	CF/CM/CU24C	1.03	1.05	0.98
RGF29100CE20MP11	CF/CM/CU30C	1.03	1.05	0.96
RGF29100CE20MP11	CF/CM/CU30D	1.03	1.07	0.96
RGF29100CE20MP11	CF/CM/CU36C	1.03	1.05	0.96
RGF29100CE20MP11	CF/CM/CU36D	1.03	1.07	0.96
RGF29120DE20MP11	CF/CM/CU30D	1.03	1.05	0.96
RGF29120DE20MP11	CF/CM/CU36D	1.03	1.02	0.96
RGF1L060AE12MP11	CF/CM/CU18A	1.03	1.04	0.92
RGF1L060AE12MP11	CF/CM/CU24A	1.03	1.08	0.89
RGF1L060AE12MP11	CF/CM/CU30A	1.03	1.05	0.91
RGF1L060AE12MP11	CF/CM36A	1.03	1.04	0.91
RGF1L080BE12MP11	CF/CM/CU18B	1.03	1.04	0.92
RGF1L080BE12MP11	CF/CM/CU24B	1.03	1.04	0.91
RGF1L080BE12MP11	CF/CM/CU30B	1.03	1.05	0.91
RGF1L080BE12MP11	CF/CM/CU36B	1.03	1.04	0.91
RGF1L080CE16MP11	CF/CM/CU24C	1.03	1.04	0.92
RGF1L080CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF1L080CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF1L080CE16MP11	CF/CM/CU36C	1.03	1.03	0.91
RGF1L080CE16MP11	CF/CM/CU36D	1.03	1.05	0.91
RGF1L100CE16MP11	CF/CM/CU24C	1.03	1.04	0.92
RGF1L100CE16MP11	CF/CM/CU30C	1.03	1.05	0.91
RGF1L100CE16MP11	CF/CM/CU30D	1.03	1.05	0.91
RGF1L100CE16MP11	CF/CM/CU36C	1.03	1.03	0.91
RGF1L100CE16MP11	CF/CM/CU36D	1.03	1.05	0.91

PERFORMANCE DATA - 2.5 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION @ COMPRESSOR		Outdoor Ambient Temperature													
			55 °F		65 °F		75 °F		85 °F		95 °F		105 °F		115 °F	
	T (°F)	P (PSIG)	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW
RAC13L30B21S	35	107	30.3	1.53	27.4	1.68	24.8	1.83	22.3	1.97	19.8	2.09	17.4	2.20	14.9	2.26
	40	119	33.9	1.51	30.9	1.68	28.0	1.84	25.3	2.00	22.7	2.15	20.0	2.28	17.3	2.38
	45	130	37.7	1.49	34.5	1.67	31.5	1.85	28.6	2.03	25.7	2.20	22.8	2.35	19.9	2.48
	50	143	42.0	1.45	38.4	1.66	35.2	1.86	32.0	2.05	28.9	2.24	25.9	2.41	22.7	2.57
	55	156	46.4	1.41	42.6	1.63	39.0	1.86	35.7	2.07	32.3	2.27	29.0	2.47	25.8	2.64

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L30B21S													
INDOOR COIL MODEL NO.			CF30BXA1													
AIR TEMP. ENTERING OUTDOOR UNIT (°F)	ID CFM	800					1000					1200				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	28.7	31.4	31.1	32.8	33.5	29.1	31.7	31.7	33.1	33.7	29.5	32.0	32.4	33.4	34.0
	S.C.	26.6	24.0	2.1	20.1	16.0	27.0	25.3	12.9	20.9	16.7	27.4	26.5	23.7	21.7	17.4
	KW	1.77	1.79	1.79	1.80	1.81	1.85	1.86	1.87	1.88	1.89	1.92	1.94	1.95	1.95	1.97
65	T.C.	27.7	30.4	30.2	32.3	33.6	28.4	31.0	30.9	32.7	34.0	29.1	31.6	31.6	33.2	34.3
	S.C.	25.7	24.1	11.3	20.2	16.1	26.4	25.8	17.6	21.3	16.8	27.0	27.6	23.9	22.4	17.6
	KW	1.94	1.96	1.96	1.98	2.00	2.02	2.04	2.04	2.06	2.08	2.10	2.12	2.12	2.14	2.16
75	T.C.	26.7	29.4	29.2	31.8	33.8	27.7	30.3	30.1	32.4	34.2	28.7	31.1	30.9	33.0	34.6
	S.C.	24.8	24.2	20.5	20.2	16.1	25.7	26.4	22.3	21.7	17.0	26.6	28.6	24.2	23.2	17.8
	KW	2.11	2.14	2.13	2.17	2.18	2.19	2.22	2.22	2.25	2.26	2.28	2.30	2.30	2.33	2.35
85	T.C.	24.7	26.7	26.7	29.9	32.5	26.2	27.8	27.7	30.7	33.0	27.7	29.0	28.8	31.5	33.6
	S.C.	22.9	22.9	19.5	19.6	15.9	24.3	24.8	21.7	21.5	16.9	25.7	26.8	23.9	23.3	18.0
	KW	2.27	2.30	2.29	2.35	2.38	2.37	2.39	2.38	2.44	2.47	2.47	2.49	2.48	2.53	2.56
95	T.C.	22.7	23.9	24.1	28.1	31.3	24.7	25.4	25.4	29.0	31.9	26.7	26.9	26.7	29.9	32.5
	S.C.	21.1	21.6	18.5	19.1	15.6	22.9	23.3	21.1	21.2	16.9	24.8	25.0	23.6	23.3	18.1
	KW	2.43	2.45	2.45	2.54	2.59	2.55	2.57	2.55	2.64	2.68	2.67	2.68	2.65	2.73	2.77
105	T.C.	20.6	21.5	21.1	24.7	28.4	22.4	22.8	22.1	25.7	29.1	24.3	24.0	23.2	26.7	29.9
	S.C.	19.1	19.6	17.2	17.9	14.6	20.8	21.0	19.1	20.2	16.0	22.6	22.3	21.0	22.4	17.4
	KW	2.61	2.62	2.60	2.69	2.78	2.73	2.73	2.70	2.79	2.87	2.85	2.85	2.81	2.89	2.97
115	T.C.	18.5	19.0	18.0	21.4	25.5	20.2	20.1	18.8	22.4	26.4	21.9	21.2	19.7	23.5	27.3
	S.C.	17.1	17.7	15.9	16.7	13.6	18.7	18.7	17.1	19.1	15.1	20.3	19.7	18.3	21.5	16.7
	KW	2.78	2.78	2.74	2.84	2.96	2.90	2.90	2.85	2.95	3.07	3.02	3.02	2.96	3.06	3.17
NOTE: ALL CAPACITIES INCLUDE INDOOR FAN HEAT. KW VALUES ARE FOR THE SYSTEM (OUTDOOR + INDOOR).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections.

NOTE: For dry bulb temperatures different than those listed (between 73-87 °F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 2.5 TON

Air Handler	Coil	T.C.	S.C.	KW
–	CF/CM/CU30B	1.00	1.00	1.00
–	CF/CM/CU30C	1.00	1.00	1.00
–	CF/CM/CU30D	1.00	1.00	1.00
–	CF/CM/CU36B	1.03	1.03	1.03
–	CF/CM/CU36C	1.03	1.03	1.03
–	CF/CM/CU36D	1.03	1.03	1.03
–	CF/CM/CU42C	1.03	1.02	1.03
–	CF/CM/CU42D	1.03	1.02	1.03
–	CF42B	1.03	1.02	1.03
RFCX30BE10MP22	–	1.01	0.95	0.93
RFCX36BE12MP22	–	1.03	1.05	0.95
RFCX36BE12MP22	–	1.03	1.05	0.95
RFCX36CE12MP22	–	1.03	1.04	0.93
RFCX30BP10MP22	–	1.03	1.03	1.01
RFCX36BP12MP22	–	1.03	1.03	1.01
RFCX36CP12MP22	–	1.03	1.02	1.01
RFCX42CP14MP22	–	1.03	1.07	1.03

FURNACE MULTIPLIERS - 2.5 TON

Furnaces	Coil	T.C.	S.C.	KW
RGF2L060AE12MP11	CF/CM/CU30A	1.01	0.93	0.96
RGF2L060AE12MP11	CF/CM36A	1.03	1.01	0.99
RGF2L080BE12MP11	CF/CM/CU30B	1.03	1.04	0.97
RGF2L080BE12MP11	CF/CM/CU36B	1.03	1.04	0.97
RGF2L080BE12MP11	CF42B	1.03	1.03	0.97
RGF2L080CE16MP11	CF/CM/CU30C	1.03	1.07	0.95
RGF2L080CE16MP11	CF/CM/CU30D	1.03	1.07	0.93
RGF2L080CE16MP11	CF/CM/CU36C	1.03	1.06	0.95
RGF2L080CE16MP11	CF/CM/CU36D	1.03	1.07	0.95
RGF2L080CE16MP11	CF/CM/CU42C	1.03	1.06	0.93
RGF2L080CE16MP11	CF/CM/CU42D	1.03	1.06	0.93
RGF2L100CE16MP11	CF/CM/CU30C	1.03	1.07	0.95
RGF2L100CE16MP11	CF/CM/CU30D	1.03	1.07	0.93
RGF2L100CE16MP11	CF/CM/CU36C	1.03	1.06	0.95
RGF2L100CE16MP11	CF/CM/CU36D	1.03	1.07	0.95
RGF2L100CE16MP11	CF/CM/CU42C	1.03	1.06	0.93
RGF2L100CE16MP11	CF/CM/CU42D	1.03	1.06	0.93
RGF2L100CE20MP11	CF/CM/CU30C	1.03	1.07	0.93
RGF2L100CE20MP11	CF/CM/CU30D	1.03	1.07	0.95
RGF2L100CE20MP11	CF/CM/CU36C	1.03	1.07	0.93
RGF2L100CE20MP11	CF/CM/CU36D	1.03	1.07	0.93
RGF2L100CE20MP11	CF/CM/CU42C	1.03	1.06	0.93
RGF2L100CE20MP11	CF/CM/CU42D	1.03	1.08	0.93
RGF2L120CE20MP11	CF/CM/CU30C	1.03	1.07	0.93
RGF2L120CE20MP11	CF/CM/CU30D	1.03	1.07	0.95
RGF2L120CE20MP11	CF/CM/CU36C	1.03	1.07	0.93
RGF2L120CE20MP11	CF/CM/CU36D	1.03	1.07	0.93
RGF2L120CE20MP11	CF/CM/CU42C	1.03	1.06	0.93
RGF2L120CE20MP11	CF/CM/CU42D	1.03	1.08	0.93
RGF19060BE12MP12	CF/CM/CU30B	1.02	0.99	0.96
RGF19060BE12MP12	CF/CM/CU36B	1.03	0.98	0.96

FURNACE MULTIPLIERS - 2.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF19060BE12MP12	CF42B	1.03	0.98	0.96
RGF19080BE12MP12	CF/CM/CU30B	1.02	0.99	0.96
RGF19080BE12MP12	CF/CM/CU36B	1.03	0.98	0.96
RGF19080BE12MP12	CF42B	1.03	0.98	0.96
RGF19080CE16MP12	CF/CM/CU30C	1.03	1.08	0.97
RGF19080CE16MP12	CF/CM/CU30D	1.03	1.07	0.97
RGF19080CE16MP12	CF/CM/CU36C	1.03	1.06	0.95
RGF19080CE16MP12	CF/CM/CU36D	1.03	1.06	0.95
RGF19080CE16MP12	CF/CM/CU42C	1.03	1.06	0.97
RGF19080CE16MP12	CF/CM/CU42D	1.03	1.07	0.93
RGF19100CE16MP12	CF/CM/CU30C	1.03	1.08	0.97
RGF19100CE16MP12	CF/CM/CU30D	1.03	1.07	0.97
RGF19100CE16MP12	CF/CM/CU36C	1.03	1.06	0.95
RGF19100CE16MP12	CF/CM/CU36D	1.03	1.06	0.95
RGF19100CE16MP12	CF/CM/CU42C	1.03	1.06	0.97
RGF19100CE16MP12	CF/CM/CU42D	1.03	1.07	0.93
RGF19100CE20MP12	CF/CM/CU30C	1.03	1.04	0.95
RGF19100CE20MP12	CF/CM/CU30D	1.00	0.93	0.96
RGF19100CE20MP12	CF/CM/CU36C	1.03	1.03	0.93
RGF19100CE20MP12	CF/CM/CU36D	1.03	1.03	0.93
RGF19100CE20MP12	CF/CM/CU42C	1.03	1.03	0.93
RGF19100CE20MP12	CF/CM/CU42D	1.03	1.03	0.93
RGF19120DE20MP12	CF/CM/CU30D	1.03	1.03	0.93
RGF19120DE20MP12	CF/CM/CU36D	1.03	1.03	0.93
RGF19120DE20MP12	CF/CM/CU42D	1.03	1.03	0.93
RGF29060BE12MP11	CF/CM/CU30B	1.02	0.99	0.96
RGF29060BE12MP11	CF/CM/CU36B	1.03	0.98	0.96
RGF29060BE12MP11	CF42B	1.03	0.98	0.96
RGF29080BE12MP11	CF/CM/CU30B	1.02	0.99	0.96
RGF29080BE12MP11	CF/CM/CU36B	1.03	0.98	0.96
RGF29080BE12MP11	CF42B	1.03	0.98	0.96
RGF29080CE16MP11	CF/CM/CU30C	1.03	1.08	0.97
RGF29080CE16MP11	CF/CM/CU30D	1.03	1.07	0.97
RGF29080CE16MP11	CF/CM/CU36C	1.03	1.06	0.95
RGF29080CE16MP11	CF/CM/CU36D	1.03	1.06	0.95
RGF29080CE16MP11	CF/CM/CU42C	1.03	1.06	0.97
RGF29080CE16MP11	CF/CM/CU42D	1.03	1.07	0.93
RGF29100CE16MP11	CF/CM/CU30C	1.03	1.08	0.97
RGF29100CE16MP11	CF/CM/CU30D	1.03	1.07	0.97
RGF29100CE16MP11	CF/CM/CU36C	1.03	1.06	0.95
RGF29100CE16MP11	CF/CM/CU36D	1.03	1.06	0.95
RGF29100CE16MP11	CF/CM/CU42C	1.03	1.06	0.97
RGF29100CE16MP11	CF/CM/CU42D	1.03	1.07	0.93
RGF29100CE20MP11	CF/CM/CU30C	1.03	1.04	0.95
RGF29100CE20MP11	CF/CM/CU30D	1.00	0.93	0.96
RGF29100CE20MP11	CF/CM/CU36C	1.03	1.03	0.93
RGF29100CE20MP11	CF/CM/CU36D	1.03	1.03	0.93
RGF29100CE20MP11	CF/CM/CU42C	1.03	1.03	0.93
RGF29100CE20MP11	CF/CM/CU42D	1.03	1.03	0.93
RGF29120DE20MP11	CF/CM/CU30D	1.03	1.03	0.93
RGF29120DE20MP11	CF/CM/CU36D	1.03	1.03	0.93

FURNACE MULTIPLIERS - 2.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF29120DE20MP11	CF/CM/CU42D	1.03	1.03	0.93
RGF1L060AE12MP11	CF/CM/CU30A	1.01	0.93	0.96
RGF1L060AE12MP11	CF/CM36A	1.03	1.01	0.99
RGF1L080BE12MP11	CF/CM/CU30B	1.03	1.04	0.97
RGF1L080BE12MP11	CF/CM/CU36B	1.03	1.04	0.97
RGF1L080BE12MP11	CF42B	1.03	1.03	0.97
RGF1L080CE16MP11	CF/CM/CU30C	1.03	1.07	0.95
RGF1L080CE16MP11	CF/CM/CU30D	1.03	1.07	0.93
RGF1L080CE16MP11	CF/CM/CU36C	1.03	1.06	0.95
RGF1L080CE16MP11	CF/CM/CU36D	1.03	1.07	0.95
RGF1L080CE16MP11	CF/CM/CU42C	1.03	1.06	0.93
RGF1L080CE16MP11	CF/CM/CU42D	1.03	1.06	0.93
RGF1L100CE16MP11	CF/CM/CU30C	1.03	1.07	0.95
RGF1L100CE16MP11	CF/CM/CU30D	1.03	1.07	0.93
RGF1L100CE16MP11	CF/CM/CU36C	1.03	1.06	0.95
RGF1L100CE16MP11	CF/CM/CU36D	1.03	1.07	0.95

FURNACE MULTIPLIERS - 2.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF1L100CE16MP11	CF/CM/CU42C	1.03	1.06	0.93
RGF1L100CE16MP11	CF/CM/CU42D	1.03	1.06	0.93
RGF1L100CE20MP11	CF/CM/CU30C	1.03	1.07	0.93
RGF1L100CE20MP11	CF/CM/CU30D	1.03	1.07	0.95
RGF1L100CE20MP11	CF/CM/CU36C	1.03	1.07	0.93
RGF1L100CE20MP11	CF/CM/CU36D	1.03	1.07	0.93
RGF1L100CE20MP11	CF/CM/CU42C	1.03	1.06	0.93
RGF1L100CE20MP11	CF/CM/CU42D	1.03	1.08	0.93
RGF1L120CE20MP11	CF/CM/CU30C	1.03	1.07	0.93
RGF1L120CE20MP11	CF/CM/CU30D	1.03	1.07	0.95
RGF1L120CE20MP11	CF/CM/CU36C	1.03	1.07	0.93
RGF1L120CE20MP11	CF/CM/CU36D	1.03	1.07	0.93
RGF1L120CE20MP11	CF/CM/CU42C	1.03	1.06	0.93
RGF1L120CE20MP11	CF/CM/CU42D	1.03	1.08	0.93

PERFORMANCE DATA - 3 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION @ COMPRESSOR		Outdoor Ambient Temperature													
			55 °F		65 °F		75 °F		85 °F		95 °F		105 °F		115 °F	
	T (°F)	P (PSIG)	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW
RAC13L36B21S	35	107	41.0	1.78	38.3	2.03	35.2	2.23	31.8	2.39	28.2	2.52	24.7	2.64	21.4	2.73
	40	119	43.8	1.74	41.2	2.02	38.1	2.25	34.7	2.44	31.1	2.59	27.3	2.72	23.6	2.84
	45	130	46.3	1.68	43.9	1.99	40.8	2.25	37.3	2.47	33.6	2.64	29.7	2.79	25.8	2.93
	50	143	48.5	1.58	46.3	1.94	43.3	2.23	39.7	2.48	36.0	2.67	32.0	2.85	27.8	3.00
	55	156	50.3	1.45	48.3	1.85	45.4	2.18	41.9	2.46	38.1	2.68	33.9	2.88	29.6	3.05

Notes:

1. For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
2. Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - a. Increase capacity by 1% for each 2°F increase in subcooling.
 - b. Decrease capacity by 1% for each 2°F decrease in subcooling.
3. Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L36B21S													
INDOOR COIL MODEL NO.			CF36BXA1													
AIR TEMP. ENTERING OUTDOOR UNIT (°F)	ID CFM	1000					1200					1400				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	34.9	36.1	35.3	36.3	39.1	35.4	36.4	35.8	36.7	38.4	35.9	36.6	36.3	37.1	37.7
	S.C.	34.9	27.3	24.6	23.2	18.7	35.4	28.3	25.6	23.5	18.9	35.9	29.3	26.5	23.8	19.2
	KW	2.17	2.16	2.17	2.17	2.19	2.24	2.24	2.25	2.26	2.27	2.31	2.32	2.33	2.34	2.34
65	T.C.	34.1	35.5	34.9	36.7	38.3	35.0	35.9	35.3	36.8	38.3	35.9	36.4	35.7	37.0	38.4
	S.C.	34.1	28.4	24.9	23.7	18.9	35.0	29.7	25.9	24.1	19.0	35.9	30.9	27.0	24.5	19.1
	KW	2.36	2.37	2.37	2.39	2.40	2.44	2.45	2.45	2.47	2.48	2.52	2.53	2.54	2.55	2.56
75	T.C.	33.2	34.8	34.4	37.0	37.5	34.5	35.5	34.7	36.9	38.3	35.8	36.1	35.0	36.8	39.0
	S.C.	33.2	29.6	25.2	24.1	19.1	34.5	31.0	26.3	24.7	19.0	35.7	32.5	27.5	25.3	19.0
	KW	2.55	2.58	2.57	2.61	2.61	2.64	2.66	2.66	2.68	2.69	2.73	2.74	2.74	2.76	2.77
85	T.C.	30.3	32.2	31.8	35.5	36.3	31.8	32.9	32.3	35.7	36.8	33.3	33.7	32.8	35.8	37.3
	S.C.	30.3	28.7	24.0	23.9	18.7	31.8	30.5	25.8	24.8	19.0	33.3	32.2	27.5	25.8	19.4
	KW	2.73	2.76	2.77	2.82	2.85	2.83	2.85	2.85	2.91	2.93	2.93	2.94	2.94	2.99	3.02
95	T.C.	27.5	29.5	29.1	34.1	35.1	29.1	30.4	29.8	34.4	35.3	30.7	31.3	30.5	34.7	35.5
	S.C.	27.5	27.8	22.9	23.6	18.4	29.1	29.9	25.3	25.0	19.1	30.7	31.3	27.6	26.4	19.8
	KW	2.91	2.95	2.96	3.03	3.09	3.02	3.05	3.05	3.13	3.17	3.14	3.15	3.14	3.22	3.26
105	T.C.	24.9	26.2	25.8	30.6	33.1	26.4	27.5	26.5	31.0	33.5	27.9	28.8	27.2	31.4	33.8
	S.C.	24.9	25.6	21.5	22.4	17.4	26.4	27.5	23.6	24.1	18.3	27.9	28.8	25.7	25.9	19.2
	KW	3.11	3.12	3.13	3.22	3.29	3.22	3.23	3.23	3.32	3.39	3.34	3.35	3.33	3.41	3.48
115	T.C.	22.3	22.8	22.4	27.1	31.1	23.8	24.6	23.1	27.6	31.6	25.2	26.3	23.8	28.1	32.1
	S.C.	22.3	22.8	20.1	21.1	16.5	23.8	24.6	22.0	23.2	17.5	25.2	26.3	23.8	25.4	18.6
	KW	3.30	3.28	3.30	3.41	3.50	3.42	3.41	3.41	3.51	3.60	3.54	3.54	3.52	3.60	3.71
NOTE: ALL CAPACITIES INCLUDE INDOOR FAN HEAT. KW VALUES ARE FOR THE SYSTEM (OUTDOOR + INDOOR).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections.

NOTE: For dry bulb temperatures different than those listed (between 73-87 °F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 3 TON

Air Handler	Coil	T.C.	S.C.	KW
–	CF/CM/CU36B	1.00	1.00	1.00
–	CF/CM/CU36C	1.00	1.00	1.00
–	CF/CM/CU36D	1.00	1.00	1.00
–	CF/CM/CU42C	1.02	1.02	1.02
–	CF/CM/CU42D	1.02	1.02	1.02
–	CF/CM/CU48C	1.02	1.02	1.02
–	CF/CM/CU48D	1.02	1.02	1.02
–	CF42B	1.02	1.02	1.02
RFCX36BE12MP22	–	1.02	0.95	0.96
RFCX36CE12MP22	–	1.02	0.96	0.92
RFCX42CE14MP22	–	1.05	1.05	0.96
RFCX48CE16MP22	–	1.05	1.06	0.96
RFCX48DE16MP22	–	1.05	1.06	0.94
RFCX36BP12MP22	–	1.01	0.94	1.01
RFCX36CP12MP22	–	1.02	0.99	1.02
RFCX42CP14MP22	–	1.02	0.99	1.02
RFCX48CP16MP22	–	1.02	1.02	1.02
RFCX48DP16MP22	–	1.02	1.02	1.02

FURNACE MULTIPLIERS - 3 TON

Furnaces	Coil	T.C.	S.C.	KW
RGF2L060AE12MP11	CF/CM36A	1.02	0.94	0.97
RGF2L080BE12MP11	CF/CM/CU36B	1.02	0.94	0.95
RGF2L080BE12MP11	CF42B	1.02	0.95	0.96
RGF2L080CE16MP11	CF/CM/CU36C	1.03	0.98	0.96
RGF2L080CE16MP11	CF/CM/CU36D	1.03	0.98	0.94
RGF2L080CE16MP11	CF/CM/CU42C	1.03	0.98	0.94
RGF2L080CE16MP11	CF/CM/CU42D	1.03	1.00	0.95
RGF2L080CE16MP11	CF/CM/CU48C	1.05	1.05	0.98
RGF2L080CE16MP11	CF/CM/CU48D	1.03	0.99	0.95
RGF2L100CE16MP11	CF/CM/CU36C	1.03	0.98	0.96
RGF2L100CE16MP11	CF/CM/CU36D	1.03	0.98	0.94
RGF2L100CE16MP11	CF/CM/CU42C	1.03	0.98	0.94
RGF2L100CE16MP11	CF/CM/CU42D	1.03	1.00	0.95
RGF2L100CE16MP11	CF/CM/CU48C	1.05	1.05	0.98
RGF2L100CE16MP11	CF/CM/CU48D	1.03	0.99	0.95
RGF2L100CE20MP11	CF/CM/CU36C	1.04	1.08	0.97
RGF2L100CE20MP11	CF/CM/CU36D	1.05	1.08	0.98
RGF2L100CE20MP11	CF/CM/CU42C	1.03	1.00	0.95
RGF2L100CE20MP11	CF/CM/CU42D	1.04	1.01	0.93
RGF2L100CE20MP11	CF/CM/CU48C	1.05	1.07	0.98
RGF2L100CE20MP11	CF/CM/CU48D	1.04	1.04	0.97
RGF2L120CE20MP11	CF/CM/CU36C	1.04	1.08	0.97
RGF2L120CE20MP11	CF/CM/CU36D	1.05	1.08	0.98
RGF2L120CE20MP11	CF/CM/CU42C	1.03	1.00	0.95
RGF2L120CE20MP11	CF/CM/CU42D	1.04	1.01	0.93
RGF2L120CE20MP11	CF/CM/CU48C	1.05	1.07	0.98
RGF2L120CE20MP11	CF/CM/CU48D	1.04	1.04	0.97
RGF19060BE12MP12	CF/CM/CU36B	1.02	0.94	0.97
RGF19060BE12MP12	CF42B	1.02	0.95	0.95
RGF19080BE12MP12	CF/CM/CU36B	1.02	0.94	0.97

FURNACE MULTIPLIERS - 3 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF19080BE12MP12	CF42B	1.02	0.95	0.95
RGF19080CE16MP12	CF/CM/CU36C	1.03	0.98	0.96
RGF19080CE16MP12	CF/CM/CU36D	1.03	0.98	0.96
RGF19080CE16MP12	CF/CM/CU42C	1.03	0.99	0.96
RGF19080CE16MP12	CF/CM/CU42D	1.03	0.99	0.96
RGF19080CE16MP12	CF/CM/CU48C	1.03	0.99	0.96
RGF19080CE16MP12	CF/CM/CU48D	1.03	0.99	0.97
RGF19100CE16MP12	CF/CM/CU36C	1.03	0.98	0.96
RGF19100CE16MP12	CF/CM/CU36D	1.03	0.98	0.96
RGF19100CE16MP12	CF/CM/CU42C	1.03	0.99	0.96
RGF19100CE16MP12	CF/CM/CU42D	1.03	0.99	0.96
RGF19100CE16MP12	CF/CM/CU48C	1.03	0.99	0.96
RGF19100CE16MP12	CF/CM/CU48D	1.03	0.99	0.97
RGF19100CE20MP12	CF/CM/CU36C	1.02	0.94	0.94
RGF19100CE20MP12	CF/CM/CU36D	1.02	0.94	0.94
RGF19100CE20MP12	CF/CM/CU42C	1.03	0.95	0.92
RGF19100CE20MP12	CF/CM/CU42D	1.03	0.96	0.92
RGF19100CE20MP12	CF/CM/CU48C	1.03	0.95	0.95
RGF19100CE20MP12	CF/CM/CU48D	1.03	0.95	0.93
RGF19120DE20MP12	CF/CM/CU36D	1.02	0.94	0.92
RGF19120DE20MP12	CF/CM/CU42D	1.03	0.96	0.92
RGF19120DE20MP12	CF/CM/CU48D	1.05	1.06	0.98
RGF29060BE12MP11	CF/CM/CU36B	1.02	0.94	0.97
RGF29060BE12MP11	CF42B	1.02	0.95	0.95
RGF29080BE12MP11	CF/CM/CU36B	1.02	0.94	0.97
RGF29080BE12MP11	CF42B	1.02	0.95	0.95
RGF29080CE16MP11	CF/CM/CU36C	1.03	0.98	0.96
RGF29080CE16MP11	CF/CM/CU36D	1.03	0.98	0.96
RGF29080CE16MP11	CF/CM/CU42C	1.03	0.99	0.96
RGF29080CE16MP11	CF/CM/CU42D	1.03	0.99	0.96
RGF29080CE16MP11	CF/CM/CU48C	1.03	0.99	0.96
RGF29080CE16MP11	CF/CM/CU48D	1.03	0.99	0.97
RGF29100CE16MP11	CF/CM/CU36C	1.03	0.98	0.96
RGF29100CE16MP11	CF/CM/CU36D	1.03	0.98	0.96
RGF29100CE16MP11	CF/CM/CU42C	1.03	0.99	0.96
RGF29100CE16MP11	CF/CM/CU42D	1.03	0.99	0.96
RGF29100CE16MP11	CF/CM/CU48C	1.03	0.99	0.96
RGF29100CE16MP11	CF/CM/CU48D	1.03	0.99	0.97
RGF29100CE20MP11	CF/CM/CU36C	1.02	0.94	0.94
RGF29100CE20MP11	CF/CM/CU36D	1.02	0.94	0.94
RGF29100CE20MP11	CF/CM/CU42C	1.03	0.95	0.92
RGF29100CE20MP11	CF/CM/CU42D	1.03	0.96	0.92
RGF29100CE20MP11	CF/CM/CU48C	1.03	0.95	0.95
RGF29100CE20MP11	CF/CM/CU48D	1.03	0.95	0.93
RGF29120DE20MP11	CF/CM/CU36D	1.02	0.94	0.92
RGF29120DE20MP11	CF/CM/CU42D	1.03	0.96	0.92
RGF29120DE20MP11	CF/CM/CU48D	1.05	1.06	0.98
RGF1L060AE12MP11	CF/CM36A	1.02	0.94	0.97
RGF1L080BE12MP11	CF/CM/CU36B	1.02	0.94	0.95
RGF1L080BE12MP11	CF42B	1.02	0.95	0.96
RGF1L080CE16MP11	CF/CM/CU36C	1.03	0.98	0.96

FURNACE MULTIPLIERS - 3 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF1L080CE16MP11	CF/CM/CU36D	1.03	0.98	0.94
RGF1L080CE16MP11	CF/CM/CU42C	1.03	0.98	0.94
RGF1L080CE16MP11	CF/CM/CU42D	1.03	1.00	0.95
RGF1L080CE16MP11	CF/CM/CU48C	1.05	1.05	0.98
RGF1L080CE16MP11	CF/CM/CU48D	1.03	0.99	0.95
RGF1L100CE16MP11	CF/CM/CU36C	1.03	0.98	0.96
RGF1L100CE16MP11	CF/CM/CU36D	1.03	0.98	0.94
RGF1L100CE16MP11	CF/CM/CU42C	1.03	0.98	0.94
RGF1L100CE16MP11	CF/CM/CU42D	1.03	1.00	0.95
RGF1L100CE16MP11	CF/CM/CU48C	1.05	1.05	0.98
RGF1L100CE16MP11	CF/CM/CU48D	1.03	0.99	0.95
RGF1L100CE20MP11	CF/CM/CU36C	1.04	1.08	0.97
RGF1L100CE20MP11	CF/CM/CU36D	1.05	1.08	0.98

FURNACE MULTIPLIERS - 3 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF1L100CE20MP11	CF/CM/CU42C	1.03	1.00	0.95
RGF1L100CE20MP11	CF/CM/CU42D	1.04	1.01	0.93
RGF1L100CE20MP11	CF/CM/CU48C	1.05	1.07	0.98
RGF1L100CE20MP11	CF/CM/CU48D	1.04	1.04	0.97
RGF1L120CE20MP11	CF/CM/CU36C	1.04	1.08	0.97
RGF1L120CE20MP11	CF/CM/CU36D	1.05	1.08	0.98
RGF1L120CE20MP11	CF/CM/CU42C	1.03	1.00	0.95
RGF1L120CE20MP11	CF/CM/CU42D	1.04	1.01	0.93
RGF1L120CE20MP11	CF/CM/CU48C	1.05	1.07	0.98
RGF1L120CE20MP11	CF/CM/CU48D	1.04	1.04	0.97

PERFORMANCE DATA - 3.5 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION @ COMPRESSOR		Outdoor Ambient Temperature													
			55 °F		65 °F		75 °F		85 °F		95 °F		105 °F		115 °F	
	T (°F)	P (PSIG)	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW
RAC13L42B21S	35	107	44.1	2.11	39.6	2.34	35.9	2.54	32.7	2.71	29.4	2.85	25.8	2.99	21.4	3.11
	40	119	48.8	2.11	44.1	2.36	40.2	2.58	36.7	2.77	33.3	2.94	29.4	3.10	24.8	3.26
	45	130	53.8	2.11	48.9	2.37	44.8	2.61	41.1	2.83	37.4	3.02	33.3	3.21	28.5	3.39
	50	143	59.1	2.10	54.1	2.38	49.7	2.65	45.6	2.89	41.6	3.10	37.4	3.31	32.3	3.51
	55	156	64.7	2.09	59.5	2.39	54.9	2.68	50.5	2.94	46.2	3.17	41.5	3.41	36.4	3.63

Notes:

1. For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
2. Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - a. Increase capacity by 1% for each 2°F increase in subcooling.
 - b. Decrease capacity by 1% for each 2°F decrease in subcooling.
3. Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L42B21S													
INDOOR COIL MODEL NO.			CF42CXA1													
AIR TEMP. ENTERING OUTDOOR UNIT (°F)	ID CFM	1200					1400					1600				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	41.5	44.4	45.3	47.5	48.3	42.0	43.1	45.5	48.1	48.7	42.5	41.9	45.7	48.7	49.2
	S.C.	41.5	35.8	30.7	29.2	23.6	42.0	37.0	31.7	30.3	23.8	42.5	38.1	32.7	31.5	24.0
	KW	2.61	2.62	2.64	2.65	2.67	2.69	2.70	2.72	2.74	2.76	2.77	2.78	2.80	2.82	2.84
65	T.C.	40.3	42.7	41.8	46.3	48.5	41.1	42.4	43.0	47.0	48.7	41.8	42.1	44.2	47.6	48.9
	S.C.	40.3	35.9	30.9	29.6	23.6	41.1	37.4	31.9	30.7	23.8	41.8	38.8	33.0	31.7	24.1
	KW	2.84	2.86	2.87	2.89	2.92	2.92	2.94	2.95	2.98	3.01	3.00	3.03	3.04	3.07	3.09
75	T.C.	39.2	40.9	38.3	45.2	48.7	40.1	41.7	40.4	45.9	48.6	41.1	42.4	42.6	46.6	48.6
	S.C.	39.2	36.0	31.1	29.9	23.5	40.1	37.8	32.2	31.0	23.9	41.1	39.6	33.2	32.0	24.2
	KW	3.07	3.10	3.10	3.13	3.18	3.16	3.18	3.18	3.22	3.26	3.24	3.27	3.27	3.32	3.35
85	T.C.	36.9	38.1	37.5	42.7	46.8	38.6	39.1	38.5	43.4	46.9	40.2	40.0	39.5	44.2	47.0
	S.C.	36.9	35.4	29.7	29.4	23.1	38.6	37.2	31.3	30.7	23.7	40.2	38.9	33.0	32.1	24.2
	KW	3.30	3.32	3.32	3.38	3.46	3.40	3.42	3.42	3.48	3.54	3.49	3.51	3.51	3.57	3.62
95	T.C.	34.6	35.3	36.7	40.2	44.8	37.0	36.5	36.6	41.0	45.1	39.4	37.7	36.5	41.8	45.3
	S.C.	34.6	34.8	28.3	28.8	22.8	37.0	36.5	30.5	30.5	23.5	38.8	37.7	32.7	32.2	24.1
	KW	3.53	3.55	3.55	3.63	3.74	3.64	3.65	3.65	3.73	3.82	3.74	3.75	3.75	3.82	3.89
105	T.C.	31.7	31.4	31.7	36.1	41.5	33.6	32.7	31.8	36.8	41.6	35.6	34.0	31.9	37.6	41.8
	S.C.	31.7	31.3	26.6	27.2	21.8	33.6	32.7	28.4	29.3	22.6	35.5	34.0	30.2	31.4	23.5
	KW	3.78	3.78	3.77	3.87	3.98	3.88	3.89	3.87	3.96	4.06	3.99	4.00	3.97	4.06	4.15
115	T.C.	28.8	27.4	26.7	31.9	38.1	30.3	28.9	27.0	32.7	38.1	31.7	30.4	27.3	33.5	38.2
	S.C.	28.8	27.4	24.9	25.7	20.7	30.3	28.9	26.3	28.1	21.8	31.7	30.4	27.3	30.6	22.8
	KW	4.02	4.01	4.00	4.11	4.21	4.13	4.13	4.10	4.20	4.31	4.24	4.25	4.19	4.29	4.41
NOTE: ALL CAPACITIES INCLUDE INDOOR FAN HEAT. KW VALUES ARE FOR THE SYSTEM (OUTDOOR + INDOOR).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections.

NOTE: For dry bulb temperatures different than those listed (between 73-87 °F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 3.5 TON

Air Handler	Coil	T.C.	S.C.	KW
–	CF/CM/CU42C	1.00	1.00	1.00
–	CF/CM/CU42D	1.00	1.00	1.00
–	CF/CM/CU48C	1.02	1.02	1.02
–	CF/CM/CU48D	1.02	1.02	1.02
–	CF/CM/CU60C	1.02	1.02	1.02
–	CF/CM/CU60D	1.02	1.02	1.02
–	CF/CM64D	1.02	1.02	1.00
–	CF42B	0.98	0.92	0.98
RFCX42CE14MP22	–	1.02	1.02	0.96
RFCX48CE16MP22	–	1.00	0.95	0.92
RFCX48DE16MP22	–	1.00	0.95	0.92
RFCX60CE20MP22	–	1.02	1.03	0.94
RFCX60DE20MP22	–	1.02	1.02	0.92
RFCX42CP14MP22	–	0.98	0.92	0.98
RFCX48CP16MP22	–	1.02	0.98	1.02
RFCX48DP16MP22	–	1.02	0.98	1.00
RFCX60CP20MP22	–	1.02	1.00	1.02
RFCX60DP20MP22	–	1.02	1.03	1.02

FURNACE MULTIPLIERS - 3.5 TON

Furnaces	Coil	T.C.	S.C.	KW
RGF2L080BE12MP11	CF42B	1.01	0.93	0.99
RGF2L080CE16MP11	CF/CM/CU42C	1.01	0.95	0.97
RGF2L080CE16MP11	CF/CM/CU42D	1.02	1.02	0.98
RGF2L080CE16MP11	CF/CM/CU48C	1.02	1.02	0.98
RGF2L080CE16MP11	CF/CM/CU48D	1.02	1.02	0.98
RGF2L080CE16MP11	CF/CM/CU48D	1.02	1.02	0.98
RGF2L080CE16MP11	CF/CM/CU60C	1.02	0.95	0.96
RGF2L080CE16MP11	CF/CM/CU60C	1.02	1.02	0.98
RGF2L080CE16MP11	CF/CM/CU60D	1.02	0.95	0.98
RGF2L080CE16MP11	CF/CM/CU60D	1.02	1.03	0.98
RGF2L080CE16MP11	CF/CM64D	1.02	0.95	0.96
RGF2L100CE16MP11	CF/CM/CU42C	1.01	0.95	0.97
RGF2L100CE16MP11	CF/CM/CU42D	1.02	1.02	0.98
RGF2L100CE16MP11	CF/CM/CU48C	1.02	1.02	0.98
RGF2L100CE16MP11	CF/CM/CU48D	1.02	1.02	0.98
RGF2L100CE16MP11	CF/CM/CU48D	1.02	1.02	0.98
RGF2L100CE16MP11	CF/CM/CU60C	1.02	0.95	0.96
RGF2L100CE16MP11	CF/CM/CU60C	1.02	1.02	0.98
RGF2L100CE16MP11	CF/CM/CU60D	1.02	0.95	0.98
RGF2L100CE16MP11	CF/CM/CU60D	1.02	1.03	0.98
RGF2L100CE16MP11	CF/CM64D	1.02	0.95	0.96
RGF2L100CE20MP11	CF/CM/CU42C	1.02	1.02	0.98
RGF2L100CE20MP11	CF/CM/CU42D	1.02	0.98	0.96
RGF2L100CE20MP11	CF/CM/CU48C	1.02	0.98	0.96
RGF2L100CE20MP11	CF/CM/CU48D	1.02	0.98	0.94
RGF2L100CE20MP11	CF/CM/CU60C	1.02	1.00	0.94
RGF2L100CE20MP11	CF/CM/CU60D	1.02	1.00	0.94
RGF2L100CE20MP11	CF/CM64D	1.02	0.98	0.94
RGF2L120CE20MP11	CF/CM/CU42C	1.02	1.02	0.98
RGF2L120CE20MP11	CF/CM/CU42D	1.02	0.98	0.96

FURNACE MULTIPLIERS - 3.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF2L120CE20MP11	CF/CM/CU48C	1.02	0.98	0.96
RGF2L120CE20MP11	CF/CM/CU48D	1.02	0.98	0.94
RGF2L120CE20MP11	CF/CM/CU60C	1.02	1.00	0.94
RGF2L120CE20MP11	CF/CM/CU60D	1.02	1.00	0.94
RGF2L120CE20MP11	CF/CM64D	1.02	0.98	0.94
RGF19080CE16MP12	CF/CM/CU42C	1.02	0.97	0.98
RGF19080CE16MP12	CF/CM/CU42D	1.02	0.98	0.98
RGF19080CE16MP12	CF/CM/CU48C	1.02	1.00	0.98
RGF19080CE16MP12	CF/CM/CU48D	1.02	0.97	0.98
RGF19080CE16MP12	CF/CM/CU60C	1.02	0.95	0.98
RGF19080CE16MP12	CF/CM/CU60C	1.02	1.02	0.98
RGF19080CE16MP12	CF/CM/CU60D	1.02	0.95	0.98
RGF19080CE16MP12	CF/CM64D	1.02	0.97	0.96
RGF19100CE16MP12	CF/CM/CU42C	1.02	0.97	0.98
RGF19100CE16MP12	CF/CM/CU42D	1.02	0.98	0.98
RGF19100CE16MP12	CF/CM/CU48C	1.02	1.00	0.98
RGF19100CE16MP12	CF/CM/CU48D	1.02	0.97	0.98
RGF19100CE16MP12	CF/CM/CU60C	1.02	0.95	0.98
RGF19100CE16MP12	CF/CM/CU60C	1.02	1.02	0.98
RGF19100CE16MP12	CF/CM/CU60D	1.02	0.95	0.98
RGF19100CE16MP12	CF/CM64D	1.02	0.97	0.96
RGF19100CE20MP12	CF/CM/CU42C	1.02	0.97	0.98
RGF19100CE20MP12	CF/CM/CU42D	1.02	0.97	0.98
RGF19100CE20MP12	CF/CM/CU48C	1.02	0.97	0.98
RGF19100CE20MP12	CF/CM/CU48D	1.02	0.97	0.98
RGF19100CE20MP12	CF/CM/CU60C	1.02	0.97	0.96
RGF19100CE20MP12	CF/CM/CU60D	1.02	0.98	0.94
RGF19100CE20MP12	CF/CM64D	1.02	0.97	0.94
RGF19120DE20MP12	CF/CM/CU42D	1.02	0.98	0.96
RGF19120DE20MP12	CF/CM/CU48D	1.02	0.98	0.96
RGF19120DE20MP12	CF/CM/CU60D	1.02	0.98	0.96
RGF19120DE20MP12	CF/CM64D	1.02	0.98	0.94
RGF29080CE16MP11	CF/CM/CU42C	1.02	0.97	0.98
RGF29080CE16MP11	CF/CM/CU42D	1.02	0.98	0.98
RGF29080CE16MP11	CF/CM/CU48C	1.02	1.00	0.98
RGF29080CE16MP11	CF/CM/CU48D	1.02	0.97	0.98
RGF29080CE16MP11	CF/CM/CU60C	1.02	0.95	0.98
RGF29080CE16MP11	CF/CM/CU60C	1.02	1.02	0.98
RGF29080CE16MP11	CF/CM/CU60D	1.02	0.95	0.98
RGF29080CE16MP11	CF/CM64D	1.02	0.97	0.96
RGF29100CE16MP11	CF/CM/CU42C	1.02	0.97	0.98
RGF29100CE16MP11	CF/CM/CU42D	1.02	0.98	0.98
RGF29100CE16MP11	CF/CM/CU48C	1.02	1.00	0.98
RGF29100CE16MP11	CF/CM/CU48D	1.02	0.97	0.98
RGF29100CE16MP11	CF/CM/CU60C	1.02	0.95	0.98
RGF29100CE16MP11	CF/CM/CU60C	1.02	1.02	0.98
RGF29100CE16MP11	CF/CM/CU60D	1.02	0.95	0.98
RGF29100CE16MP11	CF/CM64D	1.02	0.97	0.96
RGF29100CE20MP11	CF/CM/CU42C	1.02	0.97	0.98
RGF29100CE20MP11	CF/CM/CU42D	1.02	0.97	0.98
RGF29100CE20MP11	CF/CM/CU48C	1.02	0.97	0.98

FURNACE MULTIPLIERS - 3.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF29100CE20MP11	CF/CM/CU48D	1.02	0.97	0.98
RGF29100CE20MP11	CF/CM/CU60C	1.02	0.97	0.96
RGF29100CE20MP11	CF/CM/CU60D	1.02	0.98	0.94
RGF29100CE20MP11	CF/CM64D	1.02	0.97	0.94
RGF29120DE20MP11	CF/CM/CU42D	1.02	0.98	0.96
RGF29120DE20MP11	CF/CM/CU48D	1.02	0.98	0.96
RGF29120DE20MP11	CF/CM/CU60D	1.02	0.98	0.96
RGF29120DE20MP11	CF/CM64D	1.02	0.98	0.94
RGF1L080BE12MP11	CF42B	1.01	0.93	0.99
RGF1L080CE16MP11	CF/CM/CU42C	1.01	0.95	0.97
RGF1L080CE16MP11	CF/CM/CU42D	1.02	1.02	0.98
RGF1L080CE16MP11	CF/CM/CU48C	1.02	1.02	0.98
RGF1L080CE16MP11	CF/CM/CU48D	1.02	1.02	0.98
RGF1L080CE16MP11	CF/CM/CU48D	1.02	1.02	0.98
RGF1L080CE16MP11	CF/CM/CU60C	1.02	0.95	0.96
RGF1L080CE16MP11	CF/CM/CU60C	1.02	1.02	0.98
RGF1L080CE16MP11	CF/CM/CU60D	1.02	0.95	0.98
RGF1L080CE16MP11	CF/CM/CU60D	1.02	1.03	0.98
RGF1L080CE16MP11	CF/CM64D	1.02	0.95	0.96
RGF1L100CE16MP11	CF/CM/CU42C	1.01	0.95	0.97
RGF1L100CE16MP11	CF/CM/CU42D	1.02	1.02	0.98
RGF1L100CE16MP11	CF/CM/CU48C	1.02	1.02	0.98
RGF1L100CE16MP11	CF/CM/CU48D	1.02	1.02	0.98

FURNACE MULTIPLIERS - 3.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF1L100CE16MP11	CF/CM/CU48D	1.02	1.02	0.98
RGF1L100CE16MP11	CF/CM/CU60C	1.02	0.95	0.96
RGF1L100CE16MP11	CF/CM/CU60C	1.02	1.02	0.98
RGF1L100CE16MP11	CF/CM/CU60D	1.02	0.95	0.98
RGF1L100CE16MP11	CF/CM/CU60D	1.02	1.03	0.98
RGF1L100CE16MP11	CF/CM64D	1.02	0.95	0.96
RGF1L100CE20MP11	CF/CM/CU42C	1.02	1.02	0.98
RGF1L100CE20MP11	CF/CM/CU42D	1.02	0.98	0.96
RGF1L100CE20MP11	CF/CM/CU48C	1.02	0.98	0.96
RGF1L100CE20MP11	CF/CM/CU48D	1.02	0.98	0.94
RGF1L100CE20MP11	CF/CM/CU60C	1.02	1.00	0.94
RGF1L100CE20MP11	CF/CM/CU60D	1.02	1.00	0.94
RGF1L100CE20MP11	CF/CM64D	1.02	0.98	0.94
RGF1L120CE20MP11	CF/CM/CU42C	1.02	1.02	0.98
RGF1L120CE20MP11	CF/CM/CU42D	1.02	0.98	0.96
RGF1L120CE20MP11	CF/CM/CU48C	1.02	0.98	0.96
RGF1L120CE20MP11	CF/CM/CU48D	1.02	0.98	0.94
RGF1L120CE20MP11	CF/CM/CU60C	1.02	1.00	0.94
RGF1L120CE20MP11	CF/CM/CU60D	1.02	1.00	0.94
RGF1L120CE20MP11	CF/CM64D	1.02	0.98	0.94

PERFORMANCE DATA - 4 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION @ COMPRESSOR		Outdoor Ambient Temperature													
			55 °F		65 °F		75 °F		85 °F		95 °F		105 °F		115 °F	
	T (°F)	P (PSIG)	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW
RAC13L48B21S	35	107	46.2	2.20	44.0	2.49	41.7	2.79	39.4	3.13	36.9	3.51	34.3	3.98	31.5	4.51
	40	119	50.8	2.19	48.4	2.49	45.9	2.80	43.3	3.14	40.7	3.51	37.9	3.97	34.9	4.50
	45	130	55.8	2.19	53.0	2.50	50.3	2.81	47.6	3.15	44.6	3.53	41.8	3.97	38.6	4.50
	50	143	61.1	2.19	58.1	2.51	55.0	2.83	52.0	3.17	48.9	3.56	45.8	4.00	42.5	4.50
	55	156	66.7	2.20	63.4	2.52	60.0	2.85	56.6	3.21	53.4	3.58	49.9	4.04	46.6	4.52

Notes:

1. For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
2. Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - a. Increase capacity by 1% for each 2°F increase in subcooling.
 - b. Decrease capacity by 1% for each 2°F decrease in subcooling.
3. Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L48B21S													
INDOOR COIL MODEL NO.			CF48CXA1													
AIR TEMP. ENTERING OUTDOOR UNIT (°F)	ID CFM	1400					1600					1800				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	43.3	46.5	46.4	49.1	51.0	44.0	46.8	46.8	49.5	51.0	44.6	47.0	47.1	49.8	50.9
	S.C.	42.7	36.7	32.2	30.5	23.8	43.4	38.0	33.1	31.3	24.2	44.0	39.4	34.0	32.2	24.6
	KW	2.70	2.69	2.73	2.77	2.81	2.76	2.80	2.82	2.85	2.89	2.82	2.91	2.90	2.94	2.98
65	T.C.	43.2	46.0	45.9	48.8	51.5	44.1	46.4	46.4	49.2	51.5	45.0	46.8	47.0	49.7	51.6
	S.C.	42.6	37.5	32.6	31.1	24.2	43.5	39.1	34.0	32.1	24.7	44.4	40.7	35.4	33.2	25.2
	KW	2.99	2.96	3.02	3.06	3.10	3.04	3.05	3.10	3.14	3.18	3.09	3.15	3.18	3.22	3.27
75	T.C.	43.1	45.5	45.4	48.4	51.9	44.3	46.1	46.1	49.0	52.1	45.4	46.6	46.8	49.6	52.2
	S.C.	42.5	38.4	33.1	31.7	24.6	43.7	40.2	34.9	32.9	25.2	44.8	41.9	36.8	34.1	25.9
	KW	3.27	3.23	3.30	3.34	3.39	3.32	3.31	3.38	3.43	3.47	3.36	3.39	3.46	3.51	3.56
85	T.C.	41.5	43.5	43.1	47.2	50.8	43.1	44.0	43.8	47.5	50.6	44.7	44.5	44.6	47.9	50.5
	S.C.	40.9	38.1	32.2	31.6	24.2	42.5	40.0	34.2	33.2	25.0	44.0	41.8	36.3	34.8	25.8
	KW	3.58	3.63	3.65	3.72	3.78	3.65	3.69	3.74	3.80	3.87	3.72	3.75	3.82	3.89	3.95
95	T.C.	39.9	41.4	40.7	45.9	49.7	41.9	41.9	41.5	46.0	49.2	43.9	42.3	42.3	46.1	48.7
	S.C.	39.4	37.9	31.3	31.5	23.9	41.3	39.8	33.5	33.5	24.8	43.2	41.7	35.7	35.5	25.7
	KW	3.89	4.02	4.01	4.10	4.17	3.99	4.06	4.10	4.18	4.26	4.09	4.11	4.19	4.27	4.35
105	T.C.	37.6	38.3	37.4	42.3	46.8	39.3	39.3	38.0	42.7	46.4	41.0	40.4	38.7	43.1	46.1
	S.C.	37.1	36.3	29.8	30.3	22.9	38.7	38.1	32.0	32.4	24.0	40.4	39.8	34.2	34.4	25.2
	KW	4.33	4.39	4.45	4.56	4.66	4.44	4.47	4.54	4.65	4.75	4.54	4.55	4.63	4.74	4.85
115	T.C.	35.2	35.2	34.1	38.6	43.8	36.7	36.8	34.6	39.4	43.7	38.1	38.4	35.0	40.1	43.5
	S.C.	34.7	34.7	28.4	29.1	21.9	36.2	36.3	30.5	31.2	23.3	37.6	37.9	32.7	33.4	24.7
	KW	4.77	4.77	4.88	5.03	5.14	4.89	4.88	4.98	5.12	5.24	5.00	4.98	5.07	5.21	5.34
NOTE: ALL CAPACITIES INCLUDE INDOOR FAN HEAT. KW VALUES ARE FOR THE SYSTEM (OUTDOOR + INDOOR).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections.

NOTE: For dry bulb temperatures different than those listed (between 73-87 °F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 4 TON

Air Handler	Coil	T.C.	S.C.	KW
–	CF/CM/CU48C	1.00	1.00	1.00
–	CF/CM/CU48D	1.00	1.00	1.00
–	CF/CM/CU60C	1.04	1.07	1.02
–	CF/CM/CU60D	1.04	1.07	1.02
–	CF/CM64D	1.04	1.07	1.02
RFCX48CE16MP22	–	1.03	1.04	0.93
RFCX48DE16MP22	–	1.04	1.06	0.94
RFCX60CE20MP22	–	1.04	1.06	0.94
RFCX60DE20MP22	–	1.04	1.04	0.94
RFCX48CP16MP22	–	1.00	0.97	0.96
RFCX48DP16MP22	–	1.03	1.04	1.03
RFCX60CP20MP22	–	1.04	1.06	1.02
RFCX60DP20MP22	–	1.03	1.04	1.01

FURNACE MULTIPLIERS - 4 TON

Furnaces	Coil	T.C.	S.C.	KW
RGF2L080CE16MP11	CF/CM/CU48C	1.03	1.04	0.97
RGF2L080CE16MP11	CF/CM/CU48D	1.03	1.04	0.97
RGF2L080CE16MP11	CF/CM/CU60C	1.04	1.03	0.98
RGF2L080CE16MP11	CF/CM/CU60D	1.04	1.04	0.98
RGF2L080CE16MP11	CF/CM64D	1.04	1.04	0.96
RGF2L100CE16MP11	CF/CM/CU48C	1.03	1.04	0.97
RGF2L100CE16MP11	CF/CM/CU48D	1.03	1.04	0.97
RGF2L100CE16MP11	CF/CM/CU60C	1.04	1.03	0.98
RGF2L100CE16MP11	CF/CM/CU60D	1.04	1.04	0.98
RGF2L100CE16MP11	CF/CM64D	1.04	1.04	0.96
RGF2L100CE20MP11	CF/CM/CU48C	1.04	1.04	0.98
RGF2L100CE20MP11	CF/CM/CU48D	1.03	1.00	0.93
RGF2L100CE20MP11	CF/CM/CU60C	1.04	1.04	0.94
RGF2L100CE20MP11	CF/CM/CU60D	1.04	1.06	0.96
RGF2L100CE20MP11	CF/CM64D	1.04	1.06	0.94
RGF2L120CE20MP11	CF/CM/CU48C	1.04	1.04	0.98
RGF2L120CE20MP11	CF/CM/CU48D	1.03	1.00	0.93
RGF2L120CE20MP11	CF/CM/CU60C	1.04	1.04	0.94
RGF2L120CE20MP11	CF/CM/CU60D	1.04	1.06	0.96
RGF2L120CE20MP11	CF/CM64D	1.04	1.06	0.94
RGF19080CE16MP12	CF/CM/CU48C	1.02	0.99	0.96
RGF19080CE16MP12	CF/CM/CU48D	1.02	0.99	0.96
RGF19080CE16MP12	CF/CM/CU60C	1.03	1.00	0.97
RGF19080CE16MP12	CF/CM/CU60D	1.03	1.00	0.97
RGF19080CE16MP12	CF/CM64D	1.04	1.01	0.98
RGF19100CE16MP12	CF/CM/CU48C	1.02	0.99	0.96
RGF19100CE16MP12	CF/CM/CU48D	1.02	0.99	0.96
RGF19100CE16MP12	CF/CM/CU60C	1.03	1.00	0.97
RGF19100CE16MP12	CF/CM/CU60D	1.03	1.00	0.97
RGF19100CE16MP12	CF/CM64D	1.04	1.01	0.98

FURNACE MULTIPLIERS - 4 TON (Continued)

Furnaces	Coil	T.C.	S.C.	KW
RGF19100CE20MP12	CF/CM/CU48C	1.03	1.04	0.97
RGF19100CE20MP12	CF/CM/CU48D	1.04	1.04	0.98
RGF19100CE20MP12	CF/CM/CU60C	1.04	1.04	0.98
RGF19100CE20MP12	CF/CM/CU60D	1.04	1.04	0.94
RGF19100CE20MP12	CF/CM64D	1.04	1.04	0.94
RGF19120DE20MP12	CF/CM/CU48D	1.04	1.04	0.96
RGF19120DE20MP12	CF/CM/CU60D	1.04	1.04	0.94
RGF19120DE20MP12	CF/CM64D	1.04	1.03	0.94
RGF29080CE16MP11	CF/CM/CU48C	1.02	0.99	0.96
RGF29080CE16MP11	CF/CM/CU48D	1.02	0.99	0.96
RGF29080CE16MP11	CF/CM/CU60C	1.03	1.00	0.97
RGF29080CE16MP11	CF/CM/CU60D	1.03	1.00	0.97
RGF29080CE16MP11	CF/CM64D	1.04	1.01	0.98
RGF29100CE16MP11	CF/CM/CU48C	1.02	0.99	0.96
RGF29100CE16MP11	CF/CM/CU48D	1.02	0.99	0.96
RGF29100CE16MP11	CF/CM/CU60C	1.03	1.00	0.97
RGF29100CE16MP11	CF/CM/CU60D	1.03	1.00	0.97
RGF29100CE16MP11	CF/CM64D	1.04	1.01	0.98
RGF29100CE20MP11	CF/CM/CU48C	1.03	1.04	0.97
RGF29100CE20MP11	CF/CM/CU48D	1.04	1.04	0.98
RGF29100CE20MP11	CF/CM/CU60C	1.04	1.04	0.98
RGF29100CE20MP11	CF/CM/CU60D	1.04	1.04	0.94
RGF29100CE20MP11	CF/CM64D	1.04	1.04	0.94
RGF29120DE20MP11	CF/CM/CU48D	1.04	1.04	0.96
RGF29120DE20MP11	CF/CM/CU60D	1.04	1.04	0.94
RGF29120DE20MP11	CF/CM64D	1.04	1.03	0.94
RGF1L080CE16MP11	CF/CM/CU48C	1.03	1.04	0.97
RGF1L080CE16MP11	CF/CM/CU48D	1.03	1.04	0.97
RGF1L080CE16MP11	CF/CM/CU60C	1.04	1.03	0.98
RGF1L080CE16MP11	CF/CM/CU60D	1.04	1.04	0.98
RGF1L080CE16MP11	CF/CM64D	1.04	1.04	0.96
RGF1L100CE16MP11	CF/CM/CU48C	1.03	1.04	0.97
RGF1L100CE16MP11	CF/CM/CU48D	1.03	1.04	0.97
RGF1L100CE16MP11	CF/CM/CU60C	1.04	1.03	0.98
RGF1L100CE16MP11	CF/CM/CU60D	1.04	1.04	0.98
RGF1L100CE16MP11	CF/CM64D	1.04	1.04	0.96
RGF1L100CE20MP11	CF/CM/CU48C	1.04	1.04	0.98
RGF1L100CE20MP11	CF/CM/CU48D	1.03	1.00	0.93
RGF1L100CE20MP11	CF/CM/CU60C	1.04	1.04	0.94
RGF1L100CE20MP11	CF/CM/CU60D	1.04	1.06	0.96
RGF1L100CE20MP11	CF/CM64D	1.04	1.06	0.94
RGF1L120CE20MP11	CF/CM/CU48C	1.04	1.04	0.98
RGF1L120CE20MP11	CF/CM/CU48D	1.03	1.00	0.93
RGF1L120CE20MP11	CF/CM/CU60C	1.04	1.04	0.94
RGF1L120CE20MP11	CF/CM/CU60D	1.04	1.06	0.96
RGF1L120CE20MP11	CF/CM64D	1.04	1.06	0.94

PERFORMANCE DATA - 5 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION @ COMPRESSOR		Outdoor Ambient Temperature													
			55 °F		65 °F		75 °F		85 °F		95 °F		105 °F		115 °F	
	T (°F)	P (PSIG)	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW	MBH	KW
RAC13L60B21S	35	107	54.3	2.63	51.9	2.96	49.3	3.33	46.6	3.74	43.8	4.20	40.8	4.76	37.6	5.42
	40	119	59.7	2.67	56.9	3.00	54.0	3.37	51.1	3.77	48.0	4.24	45.0	4.78	41.6	5.42
	45	130	65.4	2.72	62.3	3.05	59.1	3.42	55.8	3.83	52.7	4.29	49.2	4.83	45.8	5.44
	50	143	71.3	2.78	67.9	3.12	64.5	3.48	61.0	3.89	57.4	4.35	53.8	4.88	50.2	5.48
	55	156	77.6	2.86	73.9	3.19	70.2	3.56	66.4	3.96	62.4	4.43	58.6	4.95	54.7	5.56

Notes:

1. For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
2. Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - a. Increase capacity by 1% for each 2°F increase in subcooling.
 - b. Decrease capacity by 1% for each 2°F decrease in subcooling.
3. Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L60B21S													
INDOOR COIL MODEL NO.			CF60CXA1													
AIR TEMP. ENTERING OUTDOOR UNIT (°F)	ID CFM	1520					1720					1920				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	50.4	55.0	55.3	57.5	60.4	53.0	55.9	56.3	58.8	59.2	55.5	56.8	57.2	60.1	57.9
	S.C.	50.4	45.3	40.7	38.7	30.9	52.6	47.0	41.8	39.8	31.0	52.5	48.6	42.9	41.0	31.1
	KW	3.24	3.30	3.29	3.33	3.35	3.34	3.38	3.38	3.41	3.43	3.45	3.47	3.46	3.50	3.52
65	T.C.	50.8	54.9	54.9	58.0	60.0	52.6	55.5	55.8	58.9	59.5	54.5	56.1	56.7	59.9	59.0
	S.C.	50.8	46.3	40.7	38.9	30.5	52.6	48.5	42.1	40.3	31.1	54.0	50.8	43.5	41.6	31.7
	KW	3.57	3.64	3.62	3.67	3.69	3.67	3.71	3.71	3.75	3.78	3.77	3.78	3.79	3.84	3.86
75	T.C.	51.1	54.8	54.4	58.4	59.5	52.3	55.1	55.2	59.1	59.8	53.4	55.4	56.1	59.8	60.1
	S.C.	51.1	47.2	40.7	39.1	30.2	52.3	50.1	42.3	40.7	31.2	53.4	53.1	44.0	42.3	32.2
	KW	3.90	3.97	3.95	4.01	4.03	3.99	4.03	4.04	4.09	4.12	4.08	4.10	4.12	4.18	4.20
85	T.C.	49.1	52.4	51.8	57.0	59.7	50.5	53.0	52.5	57.0	59.2	51.9	53.6	53.3	57.0	58.6
	S.C.	49.1	46.4	39.4	38.9	30.3	50.5	49.3	41.1	40.4	31.1	51.9	52.2	42.8	41.8	31.9
	KW	4.35	4.41	4.40	4.47	4.51	4.44	4.49	4.48	4.55	4.59	4.54	4.57	4.57	4.63	4.67
95	T.C.	47.0	49.9	49.2	55.7	60.0	48.7	50.9	49.8	55.0	58.6	50.3	51.9	50.4	54.3	57.2
	S.C.	47.0	45.5	38.2	38.6	30.5	48.7	48.5	39.9	40.0	31.0	50.3	51.4	41.6	41.4	31.5
	KW	4.79	4.85	4.84	4.92	4.98	4.90	4.94	4.93	5.00	5.06	5.00	5.03	5.01	5.08	5.15
105	T.C.	44.1	45.5	45.2	51.6	56.7	45.9	46.5	46.2	51.5	55.8	47.6	47.5	47.1	51.5	54.8
	S.C.	44.1	43.7	36.2	36.7	29.0	45.9	45.8	38.2	38.6	29.6	47.6	47.5	40.3	40.4	30.3
	KW	5.38	5.41	5.41	5.47	5.57	5.47	5.49	5.49	5.56	5.67	5.57	5.57	5.57	5.65	5.78
115	T.C.	41.2	41.1	41.3	47.4	53.5	43.0	42.1	42.5	48.1	53.0	44.9	43.0	43.7	48.7	52.4
	S.C.	41.2	41.1	34.2	34.9	27.4	43.0	42.1	36.6	37.2	28.3	44.9	43.0	39.0	39.4	29.1
	KW	5.96	5.97	5.97	6.02	6.17	6.05	6.04	6.05	6.12	6.29	6.15	6.12	6.12	6.22	6.40
NOTE: ALL CAPACITIES INCLUDE INDOOR FAN HEAT. KW VALUES ARE FOR THE SYSTEM (OUTDOOR + INDOOR).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections.

NOTE: For dry bulb temperatures different than those listed (between 73-87 °F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 5 TON

Air Handler	Coil	T.C.	S.C.	KW
–	CF/CM/CU60C	1.00	1.00	1.00
–	CF/CM/CU60D	1.00	1.00	1.00
–	CF/CM64D	1.03	1.03	1.03
RFCX60CE20MP22	–	1.02	1.00	1.00
RFCX60DE20MP22	–	1.04	1.04	1.01
RFCX60CP20MP22	–	0.99	0.95	1.01
RFCX60DP20MP22	–	1.00	0.96	1.02

FURNACE MULTIPLIERS - 5 TON

Furnaces	Coil	T.C.	S.C.	KW
RGF2L100CE20MP11	CF/CM/CU60C	1.02	0.99	1.00
RGF2L100CE20MP11	CF/CM/CU60D	1.02	0.99	1.00
RGF2L100CE20MP11	CF/CM64D	1.03	1.00	1.00
RGF2L120CE20MP11	CF/CM/CU60C	1.02	0.99	1.00
RGF2L120CE20MP11	CF/CM/CU60D	1.02	0.99	1.00
RGF2L120CE20MP11	CF/CM64D	1.03	1.00	1.00
RGF19100CE20MP12	CF/CM/CU60D	1.01	0.99	0.99
RGF19120DE20MP12	CF/CM/CU60D	1.02	0.99	1.00
RGF29100CE20MP11	CF/CM/CU60D	1.01	0.99	0.99
RGF29120DE20MP11	CF/CM/CU60D	1.02	0.99	1.00
RGF1L100CE20MP11	CF/CM/CU60C	1.02	0.99	1.00
RGF1L100CE20MP11	CF/CM/CU60D	1.02	0.99	1.00
RGF1L100CE20MP11	CF/CM64D	1.03	1.00	1.00
RGF1L120CE20MP11	CF/CM/CU60C	1.02	0.99	1.00
RGF1L120CE20MP11	CF/CM/CU60D	1.02	0.99	1.00
RGF1L120CE20MP11	CF/CM64D	1.03	1.00	1.00

NOTES