



## Endeavor™ Line Cased/Uncased Coils For Gas and Oil Furnaces



### **RCFZ**

featuring Industry Standard R-410A  
Refrigerant

Airflow Capacity  
600-1,900 CFM [283-897 L/s]

Table of Contents

Features & Benefits ..... 3

Model Number Identification ..... 4

Coil Specifications..... 5-6

Coil Dimensions and Weights ..... 7

Accessories ..... 8-9

Limited Warranty ..... 12

## Features & Benefits

- Ruud® Indoor Furnace cased coils and replacement uncased coils are designed for use with Ruud outdoor units and are available for vertical upflow or downflow, and horizontal left or horizontal right airflow. When matched with Ruud outdoor units, the coils provide a nominal capacity range from 18,000 BTU/HR [5.24 kW] to 60,000 BTU/HR [17.6 kW].
- Constructed of aluminum fins bonded to internally grooved aluminum tubing.
- Coils are tested at the factory with an extensive refrigerant leak check.
- Coils have copper sweat refrigerant connections.
- Feature two sets of  $\frac{3}{4}$ " [14.1 mm] N.P.T. Condensate drain connections for ease of connection.
- Chatleff metering device connections, at inlet and outlet of TXV or EEV and equalizer connections (TXV only).
- Approved for system application with variety of Ruud outdoor units.
- Condensate drain pan is constructed of high grade, heat resistant, corrosion free thermal-set material.
- Compatible with Germicidal Light System (UV resistant).
- Bi-Directional airflow eliminates the need to switch any internal components from horizontal left to right.
- Unique drain pan design maximizes application flexibility and condensate removal.
- N-Coil design maximizes performance and minimizes height required at installation.
- Coils are AHRI certified for system application with a variety of Ruud outdoor units.

Model Number Identification

| <u>R</u> | <u>C</u>         | <u>F</u>         | <u>Z</u>    | <u>24</u>                                                                                                                  | <u>14</u>                                        | <u>S</u>                                            | <u>T</u>           | <u>A</u>     | <u>A</u>                 | <u>M</u>                                            | <u>C</u>  | <u>*</u>    |
|----------|------------------|------------------|-------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-----------------------------------------------------|--------------------|--------------|--------------------------|-----------------------------------------------------|-----------|-------------|
| Brand    | Product Category | Type             | Refrigerant | Capacity                                                                                                                   | Width                                            | Efficiency                                          | Metering Device    | Major Series | Coil Series              | Orientation                                         | Casing    | Option Code |
| Ruud     | C= Coil          | F = Furnace Coil | Z = R410A   | 24 = 24,000 BTU/H<br>30 = 30,000 BTU/H<br>36 = 36,000 BTU/H<br>42 = 42,000 BTU/H<br>48 = 48,000 BTU/H<br>60 = 60,000 BTU/H | 14 = 14"<br>17 = 17.5"<br>21 = 21"<br>24 = 24.5" | S = Standard<br>M = Medium<br>H = High<br>U = Ultra | T = TXV<br>E = EXV | A = First    | A = A-Coil<br>N = N-Coil | M = Multipoise<br>V = Vertical only/<br>Convertible | C = Cased | *           |

| TXV MODELS AVAILABLE |
|----------------------|
| RCFZ2414STAAMC       |
| RCFZ2417MTANMC       |
| RCFZ2417STANMC       |
| RCFZ2421MTANMC       |
| RCFZ3617STANMC       |
| RCFZ3621MTAAMC       |
| RCFZ3621MTANMC       |
| RCFZ3621STANMC       |
| RCFZ3624MTANMC       |
| RCFZ4821STAAMC       |
| RCFZ4821STANMC       |
| RCFZ4824MTANMC       |
| RCFZ4824STANMC       |
| RCFZ6021STAAMC       |
| RCFZ6024STANMC       |

| EEV MODELS AVAILABLE |
|----------------------|
| RCFZ2417SEANMC       |
| RCFZ2421HEAAMC       |
| RCFZ3617SEANMC       |
| RCFZ3621MEAAMC       |
| RCFZ3621SEANMC       |
| RCFZ4821SEAAMC       |
| RCFZ4821SEANMC       |
| RCFZ4824SEANMC       |
| RCFZ6021SEAAMC       |
| RCFZ6024SEANMC       |
| RCFZ3621MEANMC       |
| RCFZ2421MEANMC       |
| RCFZ2421HEANMC       |

**Table 1: Coil Specifications/Airflow Pressure Drop**

| Coil Model<br>(-)CF                                              | Approx. Design Cooling Air Flow Range CFM [L/s] | Face Area Sq. Ft. [m²] | Fins Per Inch / Rows Deep | Width | Nominal Capacity | Wet Coil Static Pressure Drop (Inches W.C.) [kPa] @ CFM [L/s] – (Coil Only) |           |           |           |            |            |            |            |            |            |            |            |            |            |
|------------------------------------------------------------------|-------------------------------------------------|------------------------|---------------------------|-------|------------------|-----------------------------------------------------------------------------|-----------|-----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|                                                                  |                                                 |                        |                           |       |                  | 600 [283]                                                                   | 700 [330] | 800 [378] | 900 [425] | 1000 [472] | 1100 [519] | 1200 [566] | 1300 [614] | 1400 [661] | 1500 [708] | 1600 [755] | 1700 [802] | 1800 [850] | 1900 [897] |
| RCFZ2414STAAM                                                    | 600/900 [283/425]                               | 4.56 [0.42]            | 16/2                      | 14    | 1.5 – 2          | 0.165                                                                       | 0.209     | 0.262     | 0.325     | —          | —          | —          | —          | —          | —          | —          | —          | —          |            |
| RCFZ2417STANM<br>RCFZ2417SEANM                                   | 600/900 [283/425]                               | 4.56 [0.42]            | 16/2                      |       |                  | 0.120                                                                       | 0.157     | 0.199     | 0.246     | —          | —          | —          | —          | —          | —          | —          | —          | —          |            |
| RCFZ2417MTANM                                                    | 600/900 [283/425]                               | 5.70 [0.52]            | 16/2                      |       |                  | 0.113                                                                       | 0.145     | 0.181     | 0.222     | —          | —          | —          | —          | —          | —          | —          | —          | —          |            |
| RCFZ3617STANM<br>RCFZ3617SEANMC                                  | 700/1300 [330/614]                              | 5.70 [0.52]            | 16/2                      |       | 2.5 – 3          | 0.113                                                                       | 0.145     | 0.181     | 0.222     | 0.266      | 0.315      | 0.368      | —          | —          | —          | —          | —          | —          |            |
| RCFZ2421MTANM<br>RCFZ2421MEANM                                   | 600/900 [283/425]                               | 5.70 [0.52]            | 16/2                      |       |                  | 0.113                                                                       | 0.145     | 0.181     | 0.222     | —          | —          | —          | —          | —          | —          | —          | —          | —          |            |
| RCFZ3621STANM<br>RCFZ3621SEANM                                   | 700/1300 [330/614]                              | 5.70 [0.52]            | 16/2                      |       | 2.5 – 3          | 0.113                                                                       | 0.145     | 0.181     | 0.222     | 0.266      | 0.315      | 0.368      | —          | —          | —          | —          | —          | —          |            |
| RCFZ3621MTANM<br>RCFZ3621MEANM                                   | 700/1300 [330/614]                              | 8.55 [0.79]            | 16/2                      |       |                  | 0.062                                                                       | 0.086     | 0.112     | 0.140     | 0.170      | 0.202      | 0.236      | —          | —          | —          | —          | —          | —          |            |
| RCFZ3621MTAAM                                                    | 700/1300 [330/614]                              | 7.60 [0.70]            | 13/3                      |       |                  | 0.106                                                                       | 0.125     | 0.146     | 0.169     | 0.194      | 0.221      | 0.251      | —          | —          | —          | —          | —          | —          |            |
| RCFZ4821STAAM                                                    | 1100/1800 [519/850]                             | 7.60 [0.70]            | 13/3                      |       | 3.5 – 4          | 0.106                                                                       | 0.125     | 0.146     | 0.169     | 0.194      | 0.221      | 0.251      | 0.282      | 0.315      | 0.350      | 0.386      | 0.425      | 0.466      | —          |
| RCFZ4821STANM                                                    | 1100/1800 [519/850]                             | 8.55 [0.79]            | 16/2                      |       |                  | 0.062                                                                       | 0.086     | 0.112     | 0.140     | 0.170      | 0.202      | 0.236      | 0.272      | 0.309      | 0.349      | 0.391      | 0.434      | 0.480      | 0.527      |
| RCFZ4821STANM<br>RCFZ3621MEAAM<br>RCFZ6021STAAM<br>RCFZ2421HEAAM | 1400/1600 [661/755]                             | 7.60 [0.70]            | 13/3                      |       | 2 – 5            | 0.036                                                                       | 0.050     | 0.065     | 0.081     | 0.098      | 0.117      | 0.137      | 0.158      | 0.180      | 0.203      | 0.228      | 0.254      | —          | —          |
| RCFZ3624MTANM                                                    | 700/1300 [330/614]                              | 8.55 [0.79]            | 16/2                      |       |                  | 0.062                                                                       | 0.086     | 0.112     | 0.140     | 0.170      | 0.202      | 0.236      | 0.272      | 0.309      | —          | —          | —          | —          | —          |
| RCFZ4824STANM                                                    | 1100/1800 [519/850]                             | 8.55 [0.79]            | 16/2                      |       | 3.5 – 4          | 0.062                                                                       | 0.086     | 0.112     | 0.140     | 0.170      | 0.202      | 0.236      | 0.272      | 0.309      | 0.349      | 0.391      | 0.434      | 0.480      | —          |
| RCFZ4824MTANM                                                    | 1100/1800 [519/850]                             | 9.98 [0.93]            | 14/3                      |       |                  | 0.036                                                                       | 0.050     | 0.065     | 0.081     | 0.098      | 0.117      | 0.137      | 0.158      | 0.180      | 0.203      | 0.228      | 0.254      | 0.281      | —          |
| RCFZ6024STANM<br>RCFZ4824SEANM                                   | 1400/1800 [661/755]                             | 9.98 [0.93]            | 14/3                      |       | 5                | 0.036                                                                       | 0.050     | 0.065     | 0.081     | 0.098      | 0.117      | 0.137      | 0.158      | 0.180      | 0.203      | 0.228      | 0.254      | 0.281      | —          |

[ ] Designates Metric Conversions

**Table 1: Coil Specifications/Airflow Pressure Drop (con't.)**

| Coil Model<br>(-)CF                            | Approx.<br>Design Cooling<br>Air Flow<br>Range CFM<br>[L/s] | Face Area<br>Sq. Ft.<br>[m²] | Fins Per<br>Inch /<br>Rows<br>Deep | Width | Nominal<br>Capacity | Wet Coil Static Pressure Drop (Inches W.C.) [kPa] @ CFM [L/s] – (Coil Only) |              |              |              |               |               |               |               |               |               |               |               |               |               |
|------------------------------------------------|-------------------------------------------------------------|------------------------------|------------------------------------|-------|---------------------|-----------------------------------------------------------------------------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
|                                                |                                                             |                              |                                    |       |                     | 600<br>[283]                                                                | 700<br>[330] | 800<br>[378] | 900<br>[425] | 1000<br>[472] | 1100<br>[519] | 1200<br>[566] | 1300<br>[614] | 1400<br>[661] | 1500<br>[708] | 1600<br>[755] | 1700<br>[802] | 1800<br>[850] | 1900<br>[897] |
| RCFZ2414STAAM                                  | 600/1600<br>[283/755]                                       | 4.56<br>[0.42]               | 16/2                               | 14    | 1.5 – 2             | 0.118                                                                       | 0.118        | 0.145        | 0.176        | 0.210         | 0.247         | 0.288         | 0.332         | 0.379         | 0.429         | 0.483         | —             | —             | —             |
| RCFZ2417STANM<br>RCFZ2417SEANM                 | 600/1500<br>[283/707]                                       | 4.56<br>[0.42]               | 16/2                               |       |                     | 0.116                                                                       | 0.116        | 0.151        | 0.190        | 0.235         | 0.284         | 0.338         | 0.397         | 0.461         | 0.530         | —             | —             | —             | —             |
| RCFZ2417MTANM                                  | 600/1600<br>[283/755]                                       | 5.7<br>[.052]                | 16/2                               |       |                     | 0.101                                                                       | 0.101        | 0.129        | 0.161        | 0.196         | 0.235         | 0.277         | 0.323         | 0.373         | 0.425         | 0.482         | —             | —             | —             |
| RCFZ3617STANM<br>RCFZ3617SEANM                 | 600/1600<br>[283/755]                                       | 5.7<br>[0.52]                | 16/2                               |       | 2.5 – 3             | 0.101                                                                       | 0.101        | 0.129        | 0.161        | 0.196         | 0.235         | 0.277         | 0.323         | 0.373         | 0.425         | 0.482         | —             | —             | —             |
| RCFZ2421MTANM                                  | 600/1600<br>[283/755]                                       | 5.7<br>[0.52]                | 16/2                               |       |                     | 0.101                                                                       | 0.101        | 0.129        | 0.161        | 0.196         | 0.235         | 0.277         | 0.323         | 0.373         | 0.425         | 0.482         | —             | —             | —             |
| RCFZ2421MEANM                                  | 600/1600<br>[283/755]                                       | 5.7<br>[0.52]                | 16/2                               |       |                     | 0.101                                                                       | 0.101        | 0.129        | 0.161        | 0.196         | 0.235         | 0.277         | 0.323         | 0.373         | 0.425         | 0.482         | —             | —             | —             |
| RCFZ3621STANM<br>RCFZ3621SEANM                 | 600/1600<br>[283/755]                                       | 5.7<br>[0.52]                | 16/2                               |       | 2.5 – 3             | 0.101                                                                       | 0.101        | 0.129        | 0.161        | 0.196         | 0.235         | 0.277         | 0.323         | 0.373         | 0.425         | 0.482         | —             | —             | —             |
| RCFZ3621MTANM                                  | 600/1900<br>[283/896]                                       | 8.55<br>[0.79]               | 16/2                               |       |                     | 0.039                                                                       | 0.039        | 0.056        | 0.075        | 0.095         | 0.117         | 0.141         | 0.166         | 0.193         | 0.222         | 0.252         | 0.284         | 0.318         | 0.353         |
| RCFZ3621MTAAM<br>RCFZ3621MEANM                 | 600/1900<br>[283/896]                                       | 7.6<br>[0.70]                | 13/3                               |       |                     | 0.043                                                                       | 0.043        | 0.053        | 0.066        | 0.080         | 0.096         | 0.115         | 0.135         | 0.158         | 0.182         | 0.208         | 0.237         | 0.267         | 0.299         |
| RCFZ4821STAAM                                  | 600/1900<br>[283/896]                                       | 7.6<br>[0.70]                | 13/3                               |       | 3.5 – 4             | 0.043                                                                       | 0.043        | 0.053        | 0.066        | 0.080         | 0.096         | 0.115         | 0.135         | 0.158         | 0.182         | 0.208         | 0.237         | 0.267         | 0.299         |
| RCFZ4821STANM                                  | 600/1900<br>[283/896]                                       | 8.55<br>[0.79]               | 16/2                               |       |                     | 0.039                                                                       | 0.039        | 0.056        | 0.075        | 0.095         | 0.117         | 0.141         | 0.166         | 0.193         | 0.222         | 0.252         | 0.284         | 0.318         | 0.353         |
| RCFZ6021SEAM<br>RCFZ6021STAAM<br>RCFZ2421HEAAM | 600/1900<br>[283/896]                                       | 7.60<br>[0.70]               | 13/3                               |       | 2 – 5               | 0.080                                                                       | 0.080        | 0.092        | 0.106        | 0.121         | 0.136         | 0.153         | 0.171         | 0.190         | 0.211         | 0.232         | 0.254         | 0.278         | 0.302         |
| RCFZ4824STANM                                  | 600/1900<br>[283/896]                                       | 8.55<br>[0.79]               | 16/2                               |       | 3.5 – 4             | 0.039                                                                       | 0.039        | 0.056        | 0.075        | 0.095         | 0.117         | 0.141         | 0.166         | 0.193         | 0.222         | 0.252         | 0.284         | 0.318         | 0.353         |
| RCFZ4824MTANM                                  | 600/1900<br>[283/896]                                       | 9.98<br>[0.93]               | 14/3                               |       |                     | 0.023                                                                       | 0.023        | 0.038        | 0.055        | 0.074         | 0.095         | 0.119         | 0.144         | 0.171         | 0.200         | 0.231         | 0.264         | 0.300         | 0.337         |
| RCFZ6024STANM<br>RCFZ4824SEANM                 | 600/1900<br>[283/896]                                       | 9.98<br>[0.93]               | 14/3                               |       | 5                   | 0.023                                                                       | 0.023        | 0.038        | 0.055        | 0.074         | 0.095         | 0.119         | 0.144         | 0.171         | 0.200         | 0.231         | 0.264         | 0.300         | 0.337         |


[ ] Designates Metric Conversions

**Table 2: Cased Coil Dimensions and Weights**

| Coil Model<br>RCF           | Connections      |             | Cased Coil Dimensions<br>(in) [mm]   |                                      |                                       | Weight                      |                                 |
|-----------------------------|------------------|-------------|--------------------------------------|--------------------------------------|---------------------------------------|-----------------------------|---------------------------------|
|                             | Sweat (in.) [mm] |             | A                                    | B                                    | C                                     | Coil Weight<br>(lbs.) [Kg.] | Shipping Weight<br>(lbs.) [Kg.] |
|                             | Liquid           | Suction     |                                      |                                      |                                       |                             |                                 |
|                             | I.D.             | I.D.        |                                      |                                      |                                       |                             |                                 |
| 2414ST                      | 3/8 [9.53]       | 3/4 [19.05] | 14 [356]                             | 21 [533]                             | 23 <sup>3</sup> / <sub>16</sub> [584] | 43 [19]                     | 47 [21]                         |
| 2417ST/2417SE               | 3/8 [9.53]       | 3/4 [19.05] | 17 <sup>1</sup> / <sub>2</sub> [445] | 14 <sup>1</sup> / <sub>2</sub> [368] | 20 [508]                              | 43 [19]                     | 48 [22]                         |
| 2417MT/3617ST/3617SE        | 3/8 [9.53]       | 3/4 [19.05] | 17 <sup>1</sup> / <sub>2</sub> [445] | 17 <sup>7</sup> / <sub>8</sub> [454] | 20 [508]                              | 49 [22]                     | 54 [24]                         |
| 2421MT/3621ST/2421ME/3621SE | 3/8 [9.53]       | 3/4 [19.05] | 21 [533]                             | 17 <sup>1</sup> / <sub>2</sub> [445] | 20 [508]                              | 51 [23]                     | 60 [27]                         |
| 3621MT/4821ST/3621ME        | 3/8 [9.53]       | 7/8 [22.23] | 21 [533]                             | 25 <sup>7</sup> / <sub>8</sub> [657] | 28 [711]                              | 71 [32]                     | 78 [35]                         |
| 2421H/3621M/6021ST/6021SE   | 3/8 [9.53]       | 7/8 [22.23] | 21 [533]                             | 32 [813]                             | 34 <sup>1</sup> / <sub>2</sub> [876]  | 76 [34]                     | 86 [39]                         |
| 3624MT/4824ST/4824SE        | 3/8 [9.53]       | 3/4 [19.05] | 24 <sup>1</sup> / <sub>2</sub> [622] | 25 <sup>3</sup> / <sub>8</sub> [645] | 32 <sup>1</sup> / <sub>2</sub> [826]  | 83 [37]                     | 93 [42]                         |
| 4824MT/6024ST/4824SE/6024ME | 3/8 [9.53]       | 7/8 [22.23] | 24 <sup>1</sup> / <sub>2</sub> [622] | 30 <sup>1</sup> / <sub>4</sub> [768] | 32 <sup>1</sup> / <sub>2</sub> [826]  | 100 [45]                    | 108 [48]                        |

\*The 14 inch, 2 ton RCF coil (2414) is part of the "N-Coil" design series, even though the coil shape resembles an "A" coil design.

**FIGURE 1: DIMENSIONS CASED**

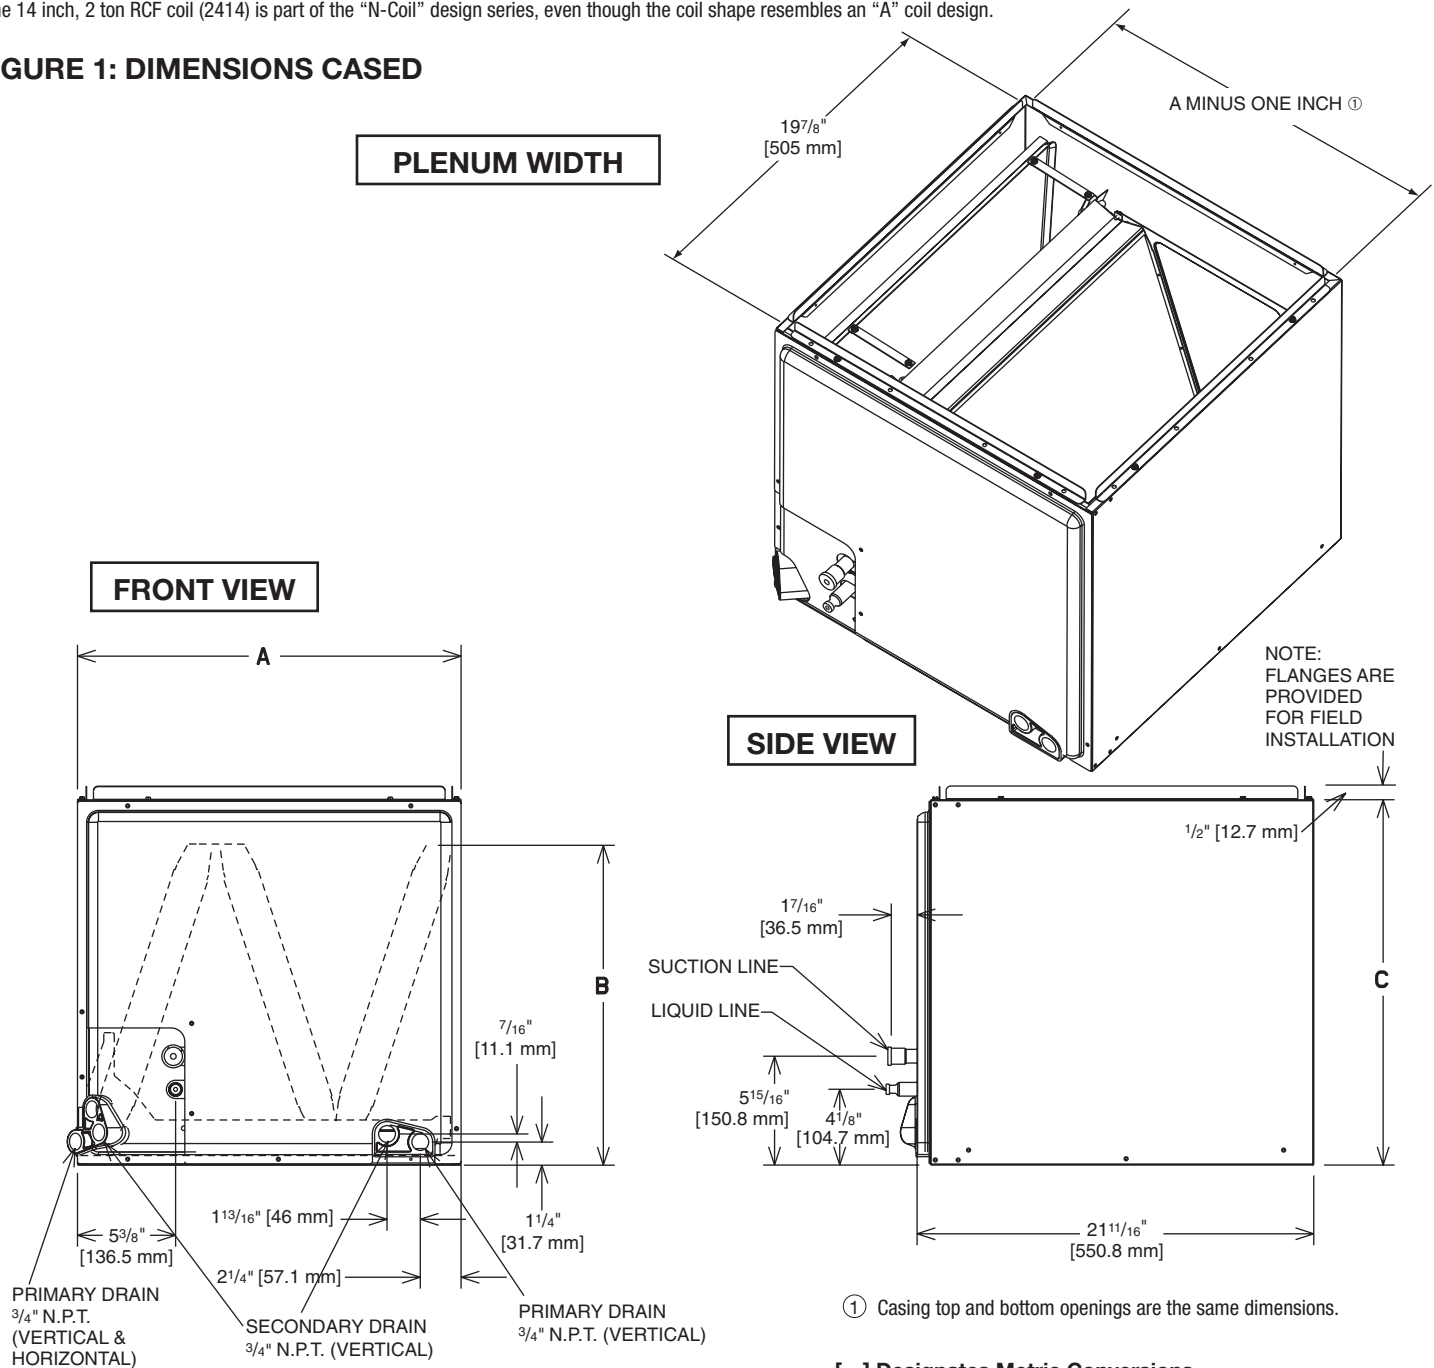

## Table 3: Coil Application

Coils can be matched to heating products as listed in table below.

| Coil Model<br>RCF                                                           | Furnace Width<br>(In.) (mm) |                          |
|-----------------------------------------------------------------------------|-----------------------------|--------------------------|
|                                                                             | Oil                         | Gas                      |
| 2414ST<br>2417ST/2417SE//2417MT<br>3617ST/3617SE                            | —                           | 14 [356]                 |
| 2417ST/2417SE/2417MT/<br>3617ST/3617SE                                      | 17 1/2 [431]                | 17 1/2 [444]<br>14 [356] |
| 2421MT/2421ME/2421HE<br>3621ST/3621MT/3621ME/3621SE<br>4821ST/6021ST/6021SE | 21 [533]                    | 21 [533]<br>17 1/2 [444] |
| 3624MT<br>4824ST/4824MT<br>6024ST/4824SE                                    | 24 1/2 [622]                | 24 1/2 [622]<br>21 [533] |

## Accessories

### • PLENUM ADAPTER ACCESSORY

#### RXBA-AE

This plenum adapter accessory is for use with the 24 1/2" wide cased indoor cooling and heat pump coils. This allows a 24 1/2" wide cased coil to be installed on a 28" wide oil furnace. This is a field-installed accessory only.

### • RXBA-AC (Upflow/Horizontal)

These plenum adapter accessories are for use when a cooling coil is matched with a gas furnace of one smaller size.


### • HORIZONTAL ADAPTER KIT RXHH (See Figure 2)

This horizontal adapter kit is used to convert a upflow or downflow coil (\*VUA) for a horizontal application. See Table 4 to order the proper horizontal adapter kit.

Table 4: Horizontal Adapter Kit Model No.

| Coil Model                        | Horizontal Adapter Kit Model No. |
|-----------------------------------|----------------------------------|
| 2414S                             | RXHH-A01                         |
| 2417S                             | RXHH-A02                         |
| 2417M/2421M/3617S/<br>3621S/2421H | RXHH-A03                         |
| 3621M/3624M/<br>4821S/4824S       | RXHH-A04                         |
| 4824M/<br>6024S                   | RXHH-A05                         |
| 2421H/3621M/4821M/<br>6021S       | RXHH-A06                         |

FIGURE 2: HORIZONTAL ADAPTER KIT ILLUSTRATION

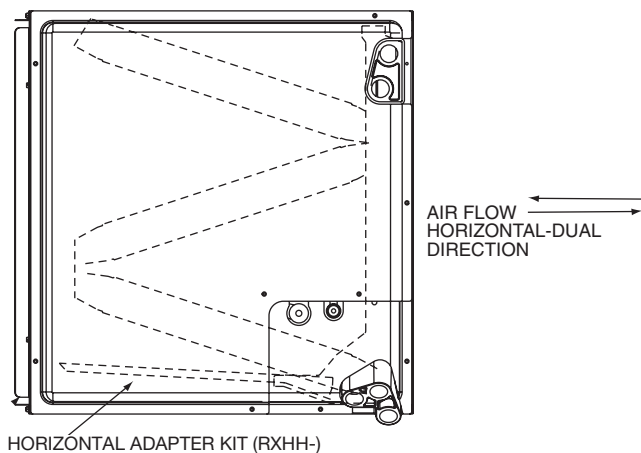

### • INDOOR COIL CASING- RXBC (See Table 5)

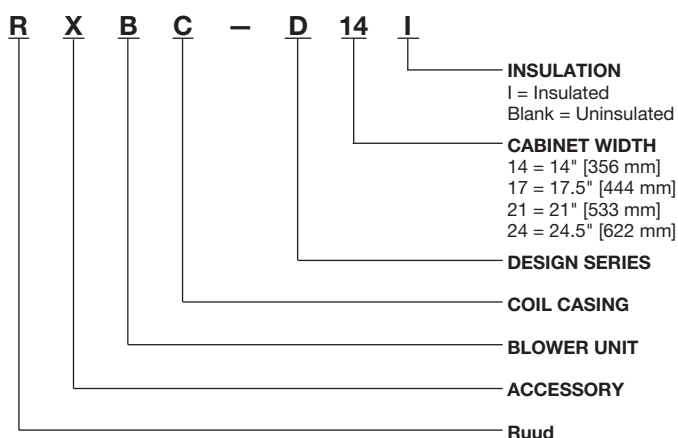


Table 5: Unit Dimensions and Weights- RXBC Indoor Coil Casings

| Model Number | Width (in.) [mm] | Height (in.) [mm] | Depth (in.) [mm] | Unit Weight         |                        | Supply Air/Return Air Openings |                  |
|--------------|------------------|-------------------|------------------|---------------------|------------------------|--------------------------------|------------------|
|              |                  |                   |                  | Weight (lbs.) [Kg.] | Ship. Wt. (lbs.) [Kg.] | Width (in.) [mm]               | Depth (in.) [mm] |
| RXBC-D14AI   | 14 [356]         | 23 3/8 [589]      | 21 5/8 [549]     | 19 [9]              | 23 [10]                | 13 [330]                       | 19 31/32 [508]   |
| RXBC-D17AI   | 17 1/2 [445]     | 20 [508]          |                  | 18 [8]              | 23 [10]                | 16 1/2 [419]                   |                  |
| RXBC-D21AI   | 21 [533]         | 20 [508]          |                  | 20 [9]              | 26 [12]                | 20 [508]                       |                  |
| RXBC-D21BI   | 21 [533]         | 28 [711]          |                  | 27 [12]             | 36 [17]                | 20 [508]                       |                  |
| RXBC-D24AI   | 24 1/2 [622]     | 32 1/2 [826]      |                  | 34 [16]             | 44 [20]                | 23 1/2 [597]                   |                  |

Table 6: Uncased Coil Adapter Kit

| Uncased Coil Adapter Model Number RXBA | A Width (in.) [mm] | Uncased Coil Model RCFP |
|----------------------------------------|--------------------|-------------------------|
| B14x20                                 | 13 1/8 [333]       | -HUxx14                 |
| B17x20                                 | 16 5/8 [422]       | -HUxx17                 |
| B21x20                                 | 20 1/8 [511]       | -HUxx21                 |
| B24x20                                 | 23 5/8 [599]       | -HUxx24                 |

[ ] Designates Metric Conversions

Accessories (cont.)

• UNCASED COIL ADAPTER KIT  
RXBA- (See Figure 3 & 4)

This uncased coil adapter kit is used to adapt the coil to a furnace or ductwork. See Table 6 to order the proper adapter kit. Each kit contains a quantity of 20 adapters.

FIGURE 3: UNCASED COIL ADAPTER KIT ILLUSTRATION


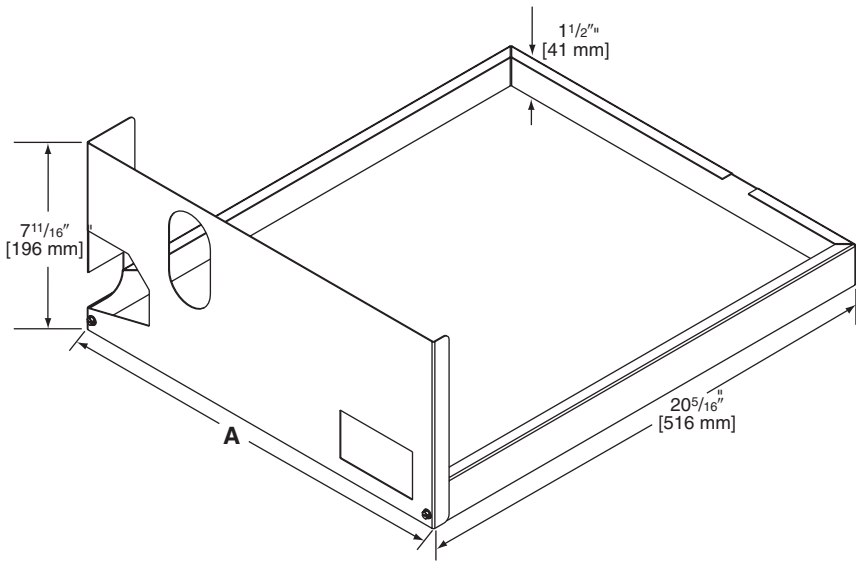


FIGURE 4: UNCASED COIL ADAPTER KIT ASSEMBLED



Note: Sliding the coil into the coil rail before attaching coil rack front.

[ ] Designates Metric Conversions

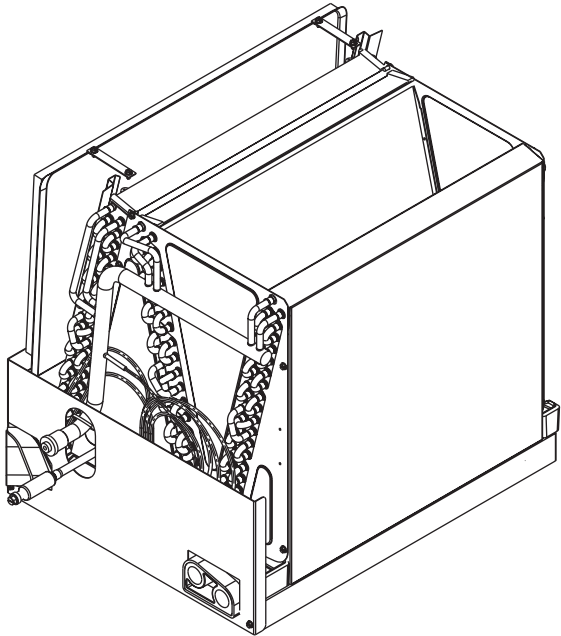





## GENERAL TERMS OF LIMITED WARRANTY\*

Ruud will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

**\*For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Conditional Parts  
(Registration Required)..... Ten (10) Years

*In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.*

Ruud Heating, Cooling & Water Heating • 5600 Old Greenwood Road  
Fort Smith, Arkansas 72908 • [www.ruud.com](http://www.ruud.com)

Ruud Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario • L6Y 0P5