



## Submittal Data Sheet

Sky-Air Heat Pump ODU

RZQ36PVJU8

### FEATURES

- 10 year limited parts and compressor warranty

### BENEFITS

- Inverter technology delivers precise temperature control and superior energy efficiency

### INDOOR UNIT



### OUTDOOR UNIT





## Submittal Data Sheet

Sky-Air Heat Pump ODU

RZQ36PVJU8

### SYSTEM PERFORMANCE

Rated Cooling Capacity (Btu/hr):		Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	/	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):		Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
SEER (Non-Ducted/Ducted):	/		
EER (Non-Ducted/Ducted):	/		

### SYSTEM DETAILS

Refrigerant Type:	R-410A	Cooling Operation Range (°F DB):	23 - 115
Holding Refrigerant Charge (lbs):	8.8	Heating Operation Range (°F WB):	-4 - 60
Additional Charge (lb/ft):	0.04	Max. Pipe Length (Vertical) (ft):	164
Pre-charge Piping (Length) (ft):	0	Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):	230	Heating Range w/Baffle (°F WB):	-
Max Height Separation (Ind to Ind ft):	0		



## Submittal Data Sheet


Sky-Air Heat Pump ODU

RZQ36PVJU8

### INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H) (CFM):	3740
Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	27	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	30	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	52-15/16 x 35-7/16 x 12-5/8	Condensate Connection (inch):	1
Net Weight (lb):	283	Sound Pressure (H) (dBA):	58
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Power Level (dBA):	

### DIMENSIONAL DRAWING - INDOOR UNIT

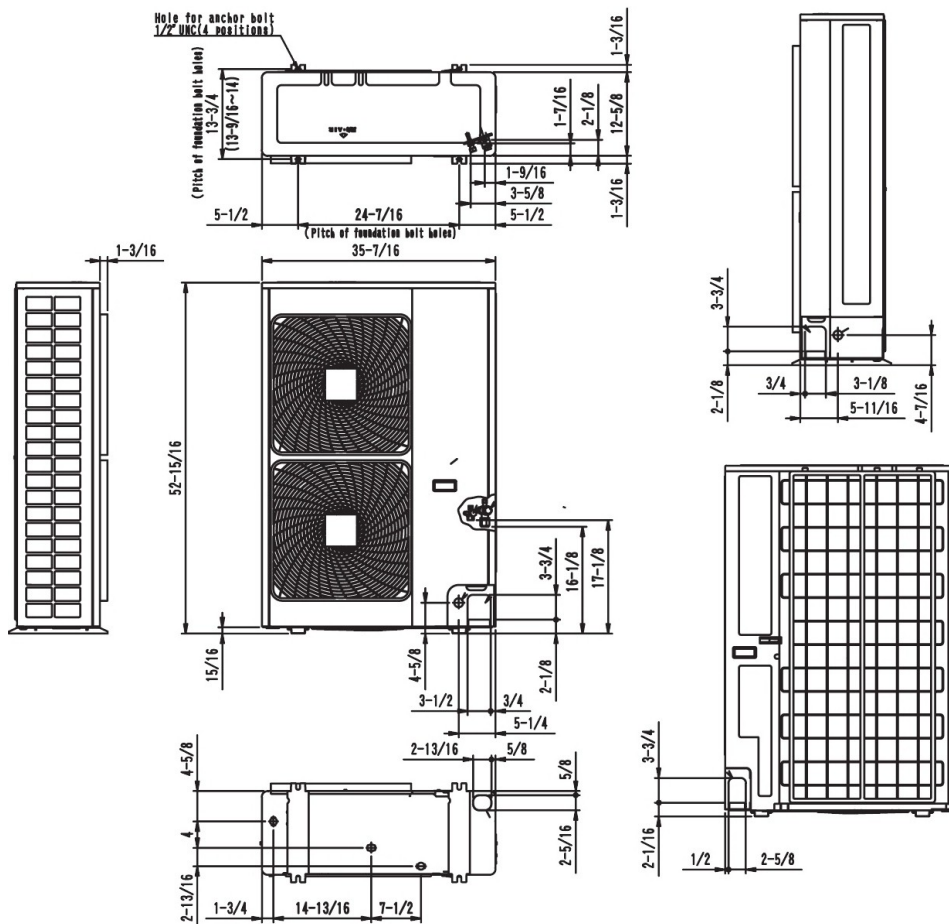



## Submittal Data Sheet


Sky-Air Heat Pump ODU

RZQ36PVJU8

### OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	27	Airflow Rate (H) (CFM):	3740
Max Overcurrent Protection (MOP) (A):	30	Gas Pipe Connection (inch):	5/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	58
Dimensions (HxWxD) (in):	52-15/16 x 35-7/16 x 12-5/8	Sound Power Level (dBA):	
Net Weight (lb):	283		

## DIMENSIONAL DRAWING - OUTDOOR UNIT

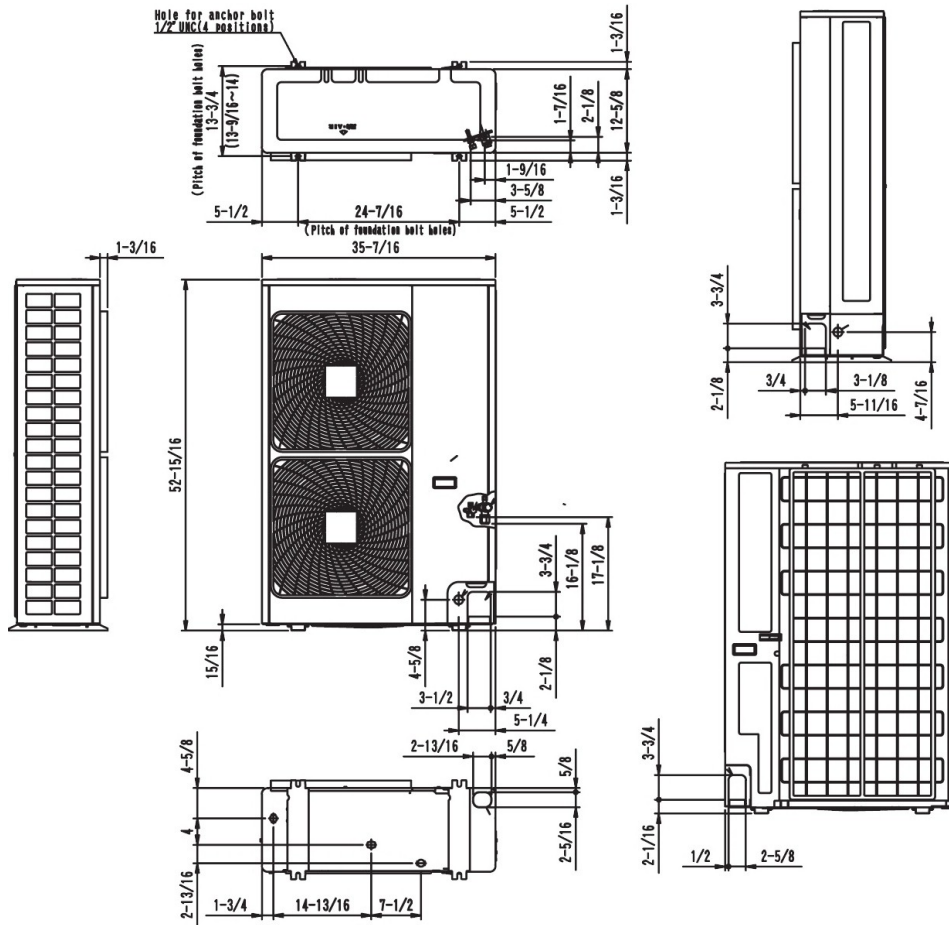

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston, TX, 77056

Daikin City Generated Submittal Data

[www.daikinac.com](http://www.daikinac.com) [www.daikincomfort.com](http://www.daikincomfort.com)

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Date: 11/3/2017 12:35:54 PM

Page 4 of 4