


tempblue™
air conditioning

HI WALL INVERTER | 60 HZ

PX Series

Up to 20 SEER

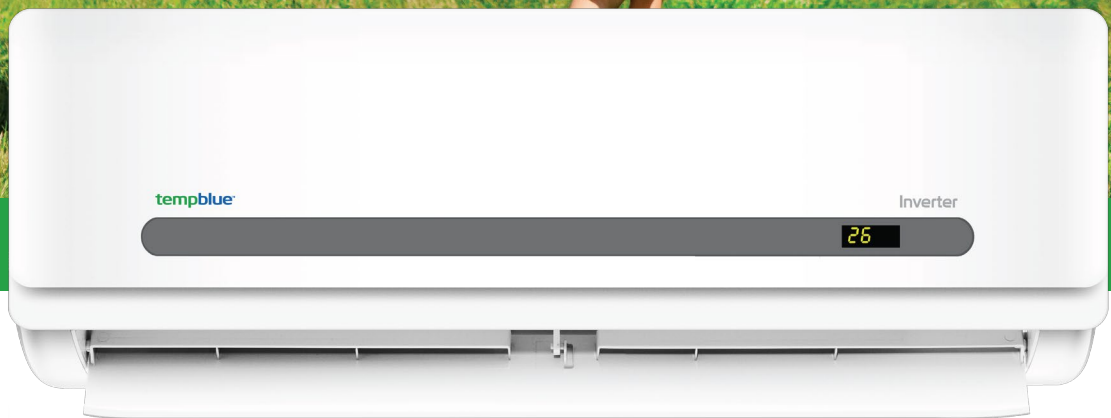

Features:

- Auto Restart Function
- 12 Grades Indoor Fan Speeds
- 5 Grades Outdoor Fan Speeds
- Turbo Mode
- 2 Way Draining
- Self Diagnosis And Auto Protection
- Auto Desfrosting
- Emergency Using Function
- Refrigerant Leakage Detect
- Low Ambient Cooling
- Anti Cold Air Function
- Louver Position Memory Function
- Manual Switch Button
- Silent Mode
- Auto Swing
- Two Directional Airflow
- Timer
- High Density Filter

Technical Specifications:

Outdoor Unit Model Number		TBG43PX009PH1N1C	TBG43PX012PH1N1C	TBG43PX009PH3N1C	TBG43PX012PH3N1C	TBG43PX018PH3N1C	TBG43PX030PH3N1H	TBG43PX036PH3N1H
Indoor Unit Model number		TBH43PX009-H1N1C	TBH43PX012-H1N1C	TBH43PX009-H3N1C	TBH43PX012-H3N1C	TBH43PX018-H3N1C	TBH43PX030-H3N1H	TBH43PX036-H3N1H
Power supply	V,HZ,Ph	115V,60Hz ,1Ph	115V,60Hz ,1Ph	208-230V, 60Hz ,1Ph	208-230V, 60Hz ,1Ph	208-230V~60Hz ,1Ph	208-230V~60Hz ,1Ph	208-230V~60Hz ,1Ph
Cooling								
Capacity	Btu/h	9000	12000	9000(3200-10200)	12000(2900-12900)	18000(5000-18700)	30000(12300-42900)	36000(15480-48960)
Input	W	824	1200	824	1200	1578	2857 (1120-3971)	4235(1736-5889)
Rated current	A	8.28	11.9	3.95	5.02	6.9	12.5	18.5
EER	Btu/w	11.00	10.00	11.00	11.00	10.80	10.5	8.5
SEER	W/W	16	16	19	19	20	18	16
Heating								
Capacity	Btu/h	N/A	N/A	N/A	N/A	N/A	30000	36000
Input	W	N/A	N/A	N/A	N/A	N/A	3110	3835
Rated current	A	N/A	N/A	N/A	N/A	N/A	13.5	16.7
COP	W/W	N/A	N/A	N/A	N/A	N/A	2.83	2.75
Indoor Unit								
Air flow (Hi/Mi/Lo)	CFM	242/198/142	280/252/171	241/206/147	280/248/170	530/441/353	795/618/471	853/647/471
Noise level (Hi/Mi/Lo)	dB(A)	36.4/-/-23.1	39.6/-/-26.1	37.6/-/25	39.8/-/25.5	42.5/34/31	52/44/35	52/44/36
Dimension(W*D*H)	inch	28.43x7.36x11.42	31.57x7.44x11.69	28.43x7.36x11.42	31.57x7.44x11.69	37.99x8.46x12.56	49.57x11.10x14.25	49.57x11.10x14.25
Packing (W*D*H)	inch	31.10x10.63x14.57	34.45x11.22x14.76	31.10x10.63x14.57	34.45x11.22x14.76	41.14x12.01x15.94	52.76x17.72x14.96	52.76x17.72x14.96
Net/Gross weight	lbs.	17.0/22.0	18.7/24.3	17.4/21.6	18.1/23.8	25.1/30.9	43.2/55.6	43.2/55.6
Outdoor Unit								
Outdoor noise level	dB(A)	53.4	53.2	54.5	53	53	62	63
Dimension(W*D*H)	inch	30.31x11.81x21.85	30.31x11.81x21.85	30.31x11.81x21.85	30.31x11.81x21.85	30.31x11.81x21.86	37.24/16.14/31.89	37.24/16.14/31.89
Packing (W*D*H)	inch	35.43x13.58x23.03	35.43x13.58x23.03	35.43x13.58x23.03	35.43x13.58x23.03	35.43x13.58x23.04	42.91x19.69x34.45	42.91x19.69x34.45
Net/Gross weight	lbs.	57.3/62.6	57.3/62.6	54/59.3	54.7/59.5	65.9/72.3	137.79/147.71	143.3/153.22
Connection Pipe								
Liquid side/ Gas side	mm(inch)	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ12.7(1/4"/1/2")	Φ6.35/Φ9.52(1/4"/3/8")	Φ6.35/Φ12.7(1/4"/1/2")	Φ6.35/Φ12.7(1/4"/1/2")	Φ9.52/Φ15.9(3/8"/5/8")	Φ9.52/Φ15.9(3/8"/5/8")
Max. Distance Height	m/ ft	25/ 82	25/ 82	25/ 82	25/ 82	30/ 98	50/164	65/213
Max. Distance Length	m/ ft	10/33	10/33	10/33	10/33	20/66	25/82	30/98
Qty'per 20' /40' /40'HQ	Unit	115/235/260	105/220/242	115/235/260	105/220/242	78/165/190	37/78/92	37/78/92

Authorized Dealer:



Carrier InterAmerica Corp
Miami, Florida USA
www.tempblue.com

REFRIGERANT **R-410A**

