


LOW DIFFERENTIAL PRESSURE SWITCHES FOR GENERAL INDUSTRIAL SERVICE

Set Points from 0.07 in w.c. to 85 in w.c. Repetitive Accuracy within 2%

PRESSURE

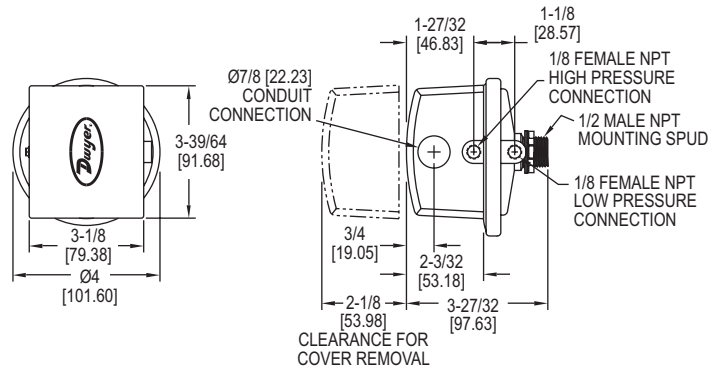

Essential for industrial environments, the **SERIES 1800** combines small size and low price with 2% repeatability for enough accuracy for all but the most demanding applications. Set point adjustment inside the mounting stud permits mounting switch on one side of a wall or panel with adjustment easily accessible on the opposite side. UL and CSA listed, and FM approved. For use with air or compatible gases.

FEATURES/BENEFITS

- Compact size and repeatability, provides a high-value switch for many industrial applications
- Designed for panel and wall mounting and provides easy access that simplifies making adjustments or changes to switch setting
- Wide range of models from 0.07 in w.c. to 85 in w.c. can meet exacting specifications for a low pressure switch

APPLICATIONS

- Process applications
- Mechanical equipment control

Service: Air and non-combustible, compatible gases.
Wetted Materials: Consult factory.
Temperature Limits: -30 to 180°F (-34 to 82.2°C); 1823-00: -20 to 180°F (-28.9 to 82.2°C).
Pressure Limits: 10 psig (68.95 kPa) continuous, 25 psig (172.4 kPa) surge.
Switch Type: Single-pole double-throw (SPDT).
Repeatability: ±2%.
Electrical Rating: 15 A @ 120-480 VAC, 60 Hz. Resistive 1/8 HP @125 VAC, 1/4 HP @ 250 VAC, 60 Hz. De-rate to 10 A for operation at high cycle rates.
Electrical Connections: 3 screw type, common, normally open and normally closed.
Process Connections: 1/8" female NPT.
Mounting Orientation: Diaphragm in vertical position. Consult factory for other position orientations.
Set Point Adjustment: Screw type inside mounting spud.
Weight: 1 lb 5 oz (595 g).
Agency Approvals: CE, CSA, FM, UL. Optional-EXPL explosion-proof enclosure does not possess any agency approvals.

OPTIONS
Weatherproof Housing 16 ga. steel enclosure with gasketed cover (NEMA 4, IP66) for wet or oily conditions. Withstands 200 hour salt spray test. Wt. 5-1/2 lb (2.5 kg). Switch must be factory installed. Note: To order, change 1823 base number to 1824, add -WP suffix and +\$390.00. Example: 1824-1-WP
Explosion-Proof Housing Cast iron base with aluminum cover. Rated Class I, Div. 1 & 2, Group D; Class II, Div. 1 & 2, Groups E, F, G; Class III and NEMA 7 CD, 9 EFG. Wt. 7-1/2 lb (3.4kg). Switch must be factory installed. Note: To order, change 1823 base number to 1824, add -EXPL suffix and +\$950.00. Example: 1824-1-EXPL
MIL Environmental Construction Unlisted Model 1820 can be furnished with a special sealed snap switch for protection against high humidity, fungus and/or military applications. Similar to Model 1823 except deadband is slightly greater and some lower setpoints may not be possible. Note: To order, add -MIL suffix and +\$200.00. Example: 1820-2-MIL
Ⓜ Items are net priced and are not subject to any discount.

MODEL CHART				
Model	Operating Range, in w.c.	Approximate Deadband		Price
		At Min. Set Point	At Max. Set Point	
1823-00	0.07 to 0.22	0.05	0.05	\$68.00
1823-0	0.15 to 0.5	0.06	0.06	65.00
1823-1	0.3 to 1.0	0.08	0.08	65.00
1823-2	0.5 to 2.0	0.10	0.12	65.00
1823-5	1.5 to 5.0	0.14	0.28	65.00
1823-10	2.0 to 10	0.18	0.45	65.00
1823-20	3 to 22	0.35	0.70	65.00
1823-40	5 to 44	0.56	1.10	65.00
1823-80	9 to 85	1.30	3.0	65.00

ACCESSORIES		
Model	Description	Price
A-389	Mounting bracket; 16 ga. steel, zinc plated and dichromate dipped for corrosion resistance; provides rugged, permanent mounting and speeds installation	\$6.50
A-489	4" straight static pressure tip with flange	6.67
A-491	6" straight static pressure tip with flange	6.67
A-493	8" straight static pressure tip with flange	7.50
A-302F-A	303 SS static pressure tip with mounting flange; for 3/16" ID rubber or plastic tubing; 4" insertion depth; includes mounting screws	9.20
A-302F-B	303 SS static pressure tip with mounting flange; for 3/16" rubber or plastic tubing; 6" insertion depth; includes mounting screws	12.75
A-302F-C	303 SS static pressure tip with mounting flange; for 3/16" rubber or plastic tubing; 8" insertion depth; includes mounting screws	14.50

Process Tubing Options: See page 499 (Gage Tubing Accessories)

Differential Pressure Switches