


ENERGY-EFFICIENT
SPLIT SYSTEM AIR CONDITIONER
UP TO 15.2 SEER2
1½ TO 5 TONS

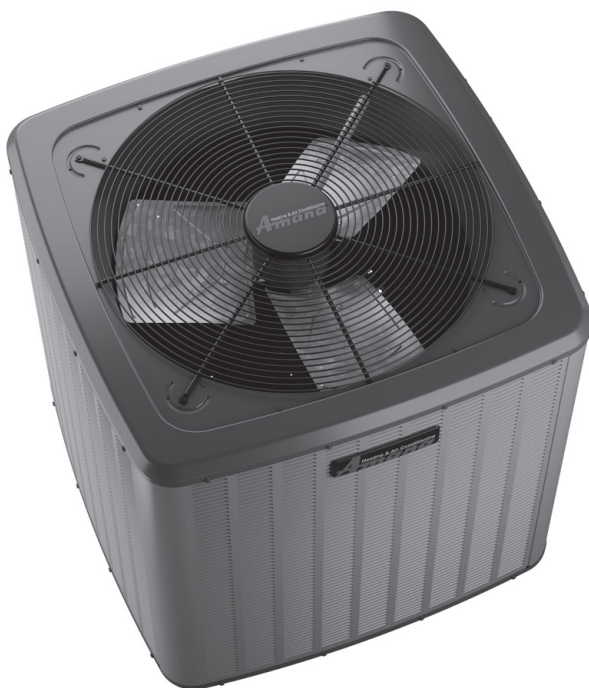

Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	4
Performance Data	18
Wiring Diagram	20
Dimensions	22
Accessories	22

Standard Features

- Energy-efficient compressor
- High-density foam compressor sound blanket on 1.5-2.5T
- Copper tube/ enhanced aluminum fin coil- 5mm diameter on 1.5-4.0T
- Single-speed PSC condenser fan motor
- Factory-installed filter drier
- Sweat connection service valves with easy access to gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Removable grille-style top design compliant with UL 60335-2-40
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Compact footprint
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV GL
 ■ ISO 9001 ■

COMPANY WITH
 ENVIRONMENTAL SYSTEM
 CERTIFIED BY DNV GL
 ■ ISO 14001 ■

* Complete warranty details available from your local dealer or at www.amana-hac.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. The duration of warranty coverages in Texas differs in some cases.

NOMENCLATURE

	A	S	X	N	4	0	036	1	0	A	A	
	1	2	3	4	5	6	7,8	9		11	12	
Brand											Minor Rev	
A Amana® Brand											A	
Product Category											Major Rev	
S Split System R-410A											A	
Unit Type											Variation	
X Condenser												
Z Heat Pump												
Feature											Electrical	
N Value											1 208/230 V, 1 Phase, 60 Hz	
B Classic												
M Multi-Family												
SEER2											Nominal Tonnage	
13.4 - 13.7 = 3											018- 1½ tons	
13.8 - 14.5 = 4											024- 2 tons	
14.6 - 15.5 = 5											030- 2½ tons	
15.6 - 16.5 = 6												
											Sales Region	
											N - North	
											S - Southeast & North	
											A- All Region	

	ASXN4 01810A*	ASXN4 02410A*	ASXN4 03010A*	ASXN4 03610A*	ASXN4 04210A*	ASXN4 04810A*	ASXN4 06010A*
COOLING CAPACITY							
Nominal Cooling (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Decibels (dBA)	71.0	72.0	72.0	72.0	71.0	73.0	75.0
COMPRESSOR							
RLA	6.1	8.4	11.6	16	17.7	19.9	25.6
LRA	35.1	41.2	59	91.9	110.2	110	150
Stage	Single	Single	Single	Single	Single	Single	Single
Type	Rotary	Rotary	Rotary	Scroll	Scroll	Scroll	Scroll
CONDENSER FAN MOTOR							
Motor Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
Horsepower (RPM)	1/8	1/8	1/6	1/6	1/6	1/4	1/4
FLA	0.70	0.70	0.95	0.95	0.97	1.30	1.30
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"	7/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) 2,3	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge ⁴	65	71	79	95	107	120	181
ELECTRICAL DATA							
Voltage-Phase	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity 5	8.3	11.2	15.5	21.0	23.1	26.2	33.3
Max. Overcurrent Protection 6	15	15	25	35	40	45	50
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Equipment Weight (lbs)	118	138	156	188	226	226	260
Ship Weight (lbs)	136	153	180	210	248	248	282

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 3/4" to 1 1/4" adapters for suction line connections.

⁶ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																																			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	17.9	18.2	18.7	-	17.8	18.0	18.6	-	17.3	17.6	18.1	-	16.5	16.8	17.3	-	15.5	15.8	16.3	-	14.7	14.9	15.4	-	14.7	14.9	15.4	-	15.5	15.8	16.3	-	14.7	14.9	15.4	-
	S/T	0.64	0.57	0.44	-	0.65	0.57	0.44	-	0.67	0.60	0.47	-	1.00	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-	1.00	0.69	0.56	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-
	ΔT	20	18	15	-	20	18	15	-	21	19	15	-	20	18	15	-	20	18	14	-	21	19	16	-	21	19	16	-	20	18	14	-	21	19	16	-
	kW	1.11	1.11	1.10	-	1.23	1.23	1.22	-	1.36	1.36	1.36	-	1.50	1.50	1.50	-	1.66	1.66	1.66	-	1.85	1.85	1.84	-	1.85	1.85	1.84	-	1.66	1.66	1.66	-	1.85	1.85	1.84	-
	Amps	4.0	4.0	3.9	-	4.5	4.5	4.5	-	5.1	5.1	5.1	-	5.8	5.8	5.7	-	6.5	6.5	6.5	-	7.3	7.3	7.3	-	7.3	7.3	7.3	-	6.5	6.5	6.5	-	7.3	7.3	7.3	-
	Hi PR	241	242	244	-	279	280	282	-	318	319	321	-	361	362	364	-	407	408	409	-	456	457	458	-	456	457	458	-	407	408	409	-	456	457	458	-
70	Lo PR	124	125	129	-	131	133	136	-	138	139	142	-	143	145	148	-	149	150	153	-	156	157	160	-	156	157	160	-	149	150	153	-	156	157	160	-
	MBh	18.1	18.4	18.9	-	18.0	18.2	18.8	-	17.5	17.8	18.3	-	16.7	17.0	17.5	-	15.7	16.0	16.5	-	14.9	15.1	15.6	-	14.9	15.1	15.6	-	15.7	16.0	16.5	-	14.9	15.1	15.6	-
	S/T	0.67	0.59	0.46	-	0.67	0.60	0.47	-	0.70	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-
	ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	17	14	-	21	19	15	-	21	19	15	-	19	17	14	-	21	19	15	-
	kW	1.11	1.11	1.11	-	1.23	1.23	1.23	-	1.36	1.36	1.36	-	1.50	1.50	1.50	-	1.66	1.66	1.66	-	1.85	1.85	1.85	-	1.85	1.85	1.85	-	1.66	1.66	1.66	-	1.85	1.85	1.85	-
	Amps	4.0	4.0	4.0	-	4.5	4.5	4.5	-	5.1	5.1	5.1	-	5.8	5.8	5.8	-	6.5	6.5	6.5	-	7.4	7.4	7.4	-	7.4	7.4	7.4	-	6.5	6.5	6.5	-	7.4	7.4	7.4	-
70	Hi PR	243	244	245	-	280	281	283	-	320	321	322	-	362	363	365	-	408	409	411	-	457	458	460	-	457	458	460	-	408	409	411	-	457	458	460	-
	Lo PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	152	155	-	157	158	162	-	157	158	162	-	150	152	155	-	157	158	162	-
	MBh	18.5	18.7	19.3	-	18.3	18.6	19.1	-	17.9	18.1	18.6	-	17.1	17.3	17.8	-	16.1	16.3	16.9	-	15.2	15.5	16.0	-	15.2	15.5	16.0	-	16.1	16.3	16.9	-	15.2	15.5	16.0	-
	S/T	0.68	0.61	0.48	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	13	-	19	18	14	-	19	18	14	-	18	16	13	-	19	18	14	-
	kW	1.12	1.12	1.11	-	1.23	1.23	1.23	-	1.37	1.37	1.36	-	1.51	1.51	1.51	-	1.67	1.67	1.67	-	1.86	1.86	1.85	-	1.86	1.86	1.85	-	1.67	1.67	1.67	-	1.86	1.86	1.85	-
75	Amps	4.0	4.0	4.0	-	4.5	4.5	4.5	-	5.1	5.1	5.1	-	5.8	5.8	5.8	-	6.5	6.5	6.5	-	7.4	7.4	7.4	-	7.4	7.4	7.4	-	6.5	6.5	6.5	-	7.4	7.4	7.4	-
	Hi PR	245	246	247	-	282	283	285	-	322	323	325	-	364	366	367	-	410	411	413	-	459	460	462	-	459	460	462	-	410	411	413	-	459	460	462	-
	Lo PR	128	129	132	-	135	137	140	-	142	143	146	-	147	149	152	-	153	154	157	-	159	161	164	-	159	161	164	-	153	154	157	-	159	161	164	-
	MBh	17.9	18.2	18.7	19.5	17.8	18.0	18.6	19.4	17.3	17.6	18.1	18.9	16.5	16.8	17.3	18.1	15.6	15.8	16.3	17.1	14.7	14.9	15.4	16.3	14.7	14.9	15.4	16.3	15.6	15.8	16.3	17.1	14.7	14.9	15.4	16.3
	S/T	0.76	0.69	0.56	0.4	0.77	0.70	0.57	0.4	1.00	0.72	0.59	0.5	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.68	0.5	1.00	0.76	0.63	0.5	1.00	1.00	0.71	0.6
	ΔT	25	23	19	15	25	23	19	15	25	23	19	15	25	23	19	15	24	22	18	14	25	23	19	15	26	24	20	16	24	22	19	15	26	24	20	16
75	kW	1.11	1.11	1.10	1.1	1.23	1.22	1.22	1.2	1.36	1.36	1.35	1.4	1.50	1.50	1.50	1.5	1.66	1.66	1.66	1.7	1.85	1.85	1.84	1.9	1.85	1.85	1.84	1.9	1.66	1.66	1.66	1.7	1.85	1.85	1.84	1.9
	Amps	4.0	4.0	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.8	5.8	5.7	5.8	6.5	6.5	6.5	6.5	7.3	7.3	7.3	7.4	7.3	7.3	7.3	7.4	6.5	6.5	6.5	6.5	7.3	7.3	7.3	7.4
	Hi PR	241	242	244	248.2	279	280	282	285.9	319	320	321	325.4	361	362	364	368.0	407	408	410	413.9	456	457	459	462.8	456	457	459	462.8	407	408	410	413.9	456	457	459	462.8
	Lo PR	124	125	129	133.8	131	133	136	141.2	138	139	143	147.7	143	145	148	153.2	149	150	153	158.6	156	157	160	165.4	156	157	160	165.4	149	150	153	158.6	156	157	160	165.4
	MBh	18.1	18.4	18.9	19.7	18.0	18.2	18.8	19.6	17.5	17.8	18.3	19.1	16.7	17.0	17.5	18.3	15.8	16.0	16.5	17.3	14.9	15.1	15.6	16.5	14.9	15.1	15.6	16.5	15.8	16.0	16.5	17.3	14.9	15.1	15.6	16.5
	S/T	0.79	0.72	0.59	0.4	0.80	0.72	0.59	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.71	0.6	1.00	0.79	0.66	0.5	1.00	1.00	0.71	0.6
75	ΔT	24	22	18	14	24	22	18	14	24	22	18	14	24	22	18	14	24	22	18	14	25	23	19	15	26	24	20	16	24	22	18	14	25	23	19	15
	kW	1.11	1.11	1.11	1.1	1.23	1.23	1.23	1.24	1.36	1.36	1.36	1.37	1.50	1.50	1.50	1.51	1.66	1.66	1.66	1.67	1.85	1.85	1.85	1.86	1.85	1.85	1.86	1.85	1.66	1.66	1.66	1.67	1.85	1.85	1.85	1.86
	Amps	4.0	4.0	4.0	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.8	5.8	5.8	5.8	6.5	6.5	6.5	6.5	7.4	7.4	7.4	7.4	7.3	7.3	7.3	7.4	6.5	6.5	6.5	6.5	7.4	7.4	7.4	7.4
	Hi PR	243	244	245	249.6	280	281	283	287.3	320	321	323	326.8	363	364	365	369.4	408	409	411	415.3	457	458	460	464.2	457	458	460	464.2	408	409	411	415.3	457	458	460	464.2
	Lo PR	125	127	130	135.2	133	134	137	142.6	139	141	144	149.1	143	145	148	154.6	150	152	155	160.0	157	158	162	166.8	157	158	162	166.8	150	152	155	160.0	157	158	162	166.8
	MBh	18.5	18.7	19.3	20.1	18.3	18.6	19.1	19.9	17.9	18.1	18.7	19.5	17.1	17.3	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.5	16.0	16.8	15.2	15.5	16.0	16.8	16.1	16.4	16.9	17.7	15.2	15.5	16.0	16.8
75	S/T	0.81	0.73	0.60	0.5	1.00																															

75	750	MBh	23.3	23.7	24.4	25.4	23.1	23.5	24.2	25.2	22.5	22.9	23.5	24.6	21.5	21.8	22.5	23.6	20.2	20.6	21.3	22.3	19.1	19.4	20.1	21.2
		S/T	0.74	0.67	0.54	0.4	0.74	0.67	0.55	0.4	0.77	0.70	0.57	0.4	1.00	0.71	0.59	0.5	1.00	0.73	0.61	0.5	1.00	0.78	0.66	0.5
		ΔT	22	20	17	13	22	20	17	13	22	20	17	14	22	20	17	13	22	20	17	13	23	21	18	14
		kW	1.43	1.43	1.42	1.4	1.58	1.58	1.58	1.6	1.76	1.76	1.76	1.8	1.95	1.95	1.95	2.0	2.16	2.16	2.16	2.2	2.41	2.41	2.41	2.4
		Amps	5.0	5.0	5.0	5.1	5.8	5.7	5.7	5.8	6.6	6.6	6.5	6.6	7.4	7.4	7.4	7.5	8.4	8.4	8.4	8.4	9.5	9.5	9.5	9.6
		Hi PR	245	246	247	251.5	283	284	286	289.7	323	324	326	329.8	366	367	369	372.9	412	413	415	419.3	462	463	465	468.9
		Lo PR	118	119	122	127.1	125	126	129	134.2	131	132	135	140.4	136	138	141	145.6	141	143	146	150.7	148	149	152	157.1
	800	MBh	23.5	23.9	24.5	25.6	23.3	23.7	24.3	25.4	22.7	23.1	23.7	24.8	21.7	22.0	22.7	23.8	20.4	20.8	21.4	22.5	19.3	19.6	20.3	21.3
		S/T	0.76	0.69	0.56	0.4	0.76	0.69	0.57	0.4	0.78	0.71	0.59	0.5	1.00	0.73	0.61	0.5	1.00	0.75	0.63	0.5	1.00	0.80	0.68	0.5
		ΔT	21	20	16	13	21	20	16	13	22	20	17	13	21	20	16	13	21	19	16	13	22	20	17	14
kW		1.43	1.43	1.43	1.44	1.59	1.59	1.58	1.60	1.76	1.76	1.76	1.77	1.95	1.95	1.95	1.96	2.17	2.16	2.16	2.17	2.41	2.41	2.41	2.42	
Amps		5.1	5.0	5.0	5.1	5.8	5.8	5.8	5.8	6.6	6.6	6.6	6.6	7.4	7.4	7.4	7.5	8.4	8.4	8.4	8.4	9.5	9.5	9.5	9.6	
Hi PR		246	247	248	252.6	284	285	287	290.8	324	325	327	330.8	367	368	370	373.9	413	414	416	420.4	463	464	466	470.0	
Lo PR		119	120	123	128.1	126	127	130	135.2	132	133	136	141.4	137	139	142	146.6	142	144	147	151.7	149	150	153	158.1	
900	MBh	24.0	24.3	25.0	26.0	23.8	24.1	24.8	25.8	23.2	23.5	24.2	25.2	22.1	22.5	23.2	24.2	20.9	21.2	21.9	22.9	19.7	20.1	20.7	21.8	
	S/T	0.77	0.70	0.58	0.4	0.78	0.71	0.58	0.5	1.00	0.73	0.61	0.5	1.00	0.75	0.63	0.5	1.00	0.77	0.65	0.5	1.00	0.82	0.69	0.6	
	ΔT	21	19	15	12	21	19	15	12	21	19	16	12	20	19	15	12	20	18	15	12	21	20	16	13	
	kW	1.44	1.44	1.43	1.4	1.60	1.59	1.59	1.6	1.77	1.77	1.77	1.8	1.96	1.96	1.96	2.0	2.17	2.17	2.17	2.2	2.42	2.42	2.42	2.4	
	Amps	5.1	5.1	5.1	5.1	5.8	5.8	5.8	5.8	6.6	6.6	6.6	6.6	7.5	7.5	7.5	7.5	8.4	8.4	8.4	8.5	9.6	9.6	9.6	9.6	
	Hi PR	248	249	251	254.8	286	287	289	293.0	326	327	329	333.0	369	370	372	376.1	416	417	418	422.6	465	466	468	472.2	
	Lo PR	121	122	125	130.4	128	130	132	137.4	134	136	139	143.6	140	141	144	148.8	145	146	149	153.9	151	152	155	160.4	

DB: Entering Indoor Dry Bulb Temperature high and low pressures are measured at the liquid and suction service valves.	Shaded area reflects ACCA (TVA) conditions	kW = Total system power Amps = outdoor unit amps (comp.+fan)
---	--	---

		OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
		65						75						85						95						105						115																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195	199	203	207	211	215																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
80	MBh	23.5	23.8	24.5	25.5	23.3	23.6	24.3	25.3	22.7	23.0	23.7	24.7	21.6	21.9	22.6	23.7	20.4	20.7	21.4	22.4	19.2	19.5	20.2	21.3	18.0	18.3	19.0	19.7	20.4	21.1	21.8	22.5	23.2	23.9	24.6	25.3	26.0	26.7	27.4	28.1	28.8	29.5	30.2	30.9	31.6	32.3	33.0	33.7	34.4	35.1	35.8	36.5	37.2	37.9	38.6	39.3	40.0	40.7	41.4	42.1	42.8	43.5	44.2	44.9	45.6	46.3	47.0	47.7	48.4	49.1	49.8	50.5	51.2	51.9	52.6	53.3	54.0	54.7	55.4	56.1	56.8	57.5	58.2	58.9	59.6	60.3	61.0	61.7	62.4	63.1	63.8	64.5	65.2	65.9	66.6	67.3	68.0	68.7	69.4	70.1	70.8	71.5	72.2	72.9	73.6	74.3	75.0	75.7	76.4	77.1	77.8	78.5	79.2	79.9	80.6	81.3	82.0	82.7	83.4	84.1	84.8	85.5	86.2	86.9	87.6	88.3	89.0	89.7	90.4	91.1	91.8	92.5	93.2	93.9	94.6	95.3	96.0	96.7	97.4	98.1	98.8	99.5	100.2	100.9	101.6	102.3	103.0	103.7	104.4	105.1	105.8	106.5	107.2	107.9	108.6	109.3	110.0	110.7	111.4	112.1	112.8	113.5	114.2	114.9	115.6	116.3	117.0	117.7	118.4	119.1	119.8	120.5	121.2	121.9	122.6	123.3	124.0	124.7	125.4	126.1	126.8	127.5	128.2	128.9	129.6	130.3	131.0	131.7	132.4	133.1	133.8	134.5	135.2	135.9	136.6	137.3	138.0	138.7	139.4	140.1	140.8	141.5	142.2	142.9	143.6	144.3	145.0	145.7	146.4	147.1	147.8	148.5	149.2	149.9	150.6	151.3	152.0	152.7	153.4	154.1	154.8	155.5	156.2	156.9	157.6	158.3	159.0	159.7	160.4	161.1	161.8	162.5	163.2	163.9	164.6	165.3	166.0	166.7	167.4	168.1	168.8	169.5	170.2	170.9	171.6	172.3	173.0	173.7	174.4	175.1	175.8	176.5	177.2	177.9	178.6	179.3	180.0	180.7	181.4	182.1	182.8	183.5	184.2	184.9	185.6	186.3	187.0	187.7	188.4	189.1	189.8	190.5	191.2	191.9	192.6	193.3	194.0	194.7	195.4	196.1	196.8	197.5	198.2	198.9	199.6	200.3	201.0	201.7	202.4	203.1	203.8	204.5	205.2	205.9	206.6	207.3	208.0	208.7	209.4	210.1	210.8	211.5	212.2	212.9	213.6	214.3	215.0	215.7	216.4	217.1	217.8	218.5	219.2	219.9	220.6	221.3	222.0	222.7	223.4	224.1	224.8	225.5	226.2	226.9	227.6	228.3	229.0	229.7	230.4	231.1	231.8	232.5	233.2	233.9	234.6	235.3	236.0	236.7	237.4	238.1	238.8	239.5	240.2	240.9	241.6	242.3	243.0	243.7	244.4	245.1	245.8	246.5	247.2	247.9	248.6	249.3	250.0	250.7	251.4	252.1	252.8	253.5	254.2	254.9	255.6	256.3	257.0	257.7	258.4	259.1	259.8	260.5	261.2	261.9	262.6	263.3	264.0	264.7	265.4	266.1	266.8	267.5	268.2	268.9	269.6	270.3	271.0	271.7	272.4	273.1	273.8	274.5	275.2	275.9	276.6	277.3	278.0	278.7	279.4	280.1	280.8	281.5	282.2	282.9	283.6	284.3	285.0	285.7	286.4	287.1	287.8	288.5	289.2	289.9	290.6	291.3	292.0	292.7	293.4	294.1	294.8	295.5	296.2	296.9	297.6	298.3	299.0	299.7	300.4	301.1	301.8	302.5	303.2	303.9	304.6	305.3	306.0	306.7	307.4	308.1	308.8	309.5	310.2	310.9	311.6	312.3	313.0	313.7	314.4	315.1	315.8	316.5	317.2	317.9	318.6	319.3	320.0	320.7	321.4	322.1	322.8	323.5	324.2	324.9	325.6	326.3	327.0	327.7	328.4	329.1	329.8	330.5	331.2	331.9	332.6	333.3	334.0	334.7	335.4	336.1	336.8	337.5	338.2	338.9	339.6	340.3	341.0	341.7	342.4	343.1	343.8	344.5	345.2	345.9	346.6	347.3	348.0	348.7	349.4	350.1	350.8	351.5	352.2	352.9	353.6	354.3	355.0	355.7	356.4	357.1	357.8	358.5	359.2	359.9	360.6	361.3	362.0	362.7	363.4	364.1	364.8	365.5	366.2	366.9	367.6	368.3	369.0	369.7	370.4	371.1	371.8	372.5	373.2	373.9	374.6	375.3	376.0	376.7	377.4	378.1	378.8	379.5	380.2	380.9	381.6	382.3	383.0	383.7	384.4	385.1	385.8	386.5	387.2	387.9	388.6	389.3	390.0	390.7	391.4	392.1	392.8	393.5	394.2	394.9	395.6	396.3	397.0	397.7	398.4	399.1	399.8	400.5	401.2	401.9	402.6	403.3	404.0	404.7	405.4	406.1	406.8	407.5	408.2	408.9	409.6	410.3	411.0	411.7	412.4	413.1	413.8	414.5	415.2	415.9	416.6	417.3	418.0	418.7	419.4	420.1	420.8	421.5	422.2	422.9	423.6	424.3	425.0	425.7	426.4	427.1	427.8	428.5	429.2	429.9	430.6	431.3	432.0	432.7	433.4	434.1	434.8	435.5	436.2	436.9	437.6	438.3	439.0	439.7	440.4	441.1	441.8	442.5	443.2	443.9	444.6	445.3	446.0	446.7	447.4	448.1	448.8	449.5	450.2	450.9	451.6	452.3	453.0	453.7	454.4	455.1	455.8	456.5	457.2	457.9	458.6	459.3	460.0	460.7	461.4	462.1	462.8	463.5	464.2	464.9	465.6	466.3	467.0	467.7	468.4	469.1	469.8	470.5	471.2	471.9	472.6	473.3	474.0	474.7	475.4	476.1	476.8	477.5	478.2	478.9	479.6	480.3	481.0	481.7	482.4	483.1	483.8	484.5	485.2	485.9	486.6	487.3	488.0	488.7	489.4	490.1	490.8	491.5	492.2	492.9	493.6	494.3	495.0	495.7	496.4	497.1	497.8	498.5	499.2	499.9	500.6	501.3	502.0	502.7	503.4	504.1	504.8	505.5	506.2	506.9	507.6	508.3	509.0	509.7	510.4	511.1	511.8	512.5	513.2	513.9	514.6	515.3	516.0	516.7	517.4	518.1	518.8	519.5	520.2	520.9	521.6	522.3	523.0	523.7	524.4	525.1	525.8	526.5	527.2	527.9	528.6	529.3	530.0	530.7	531.4	532.1	532.8	533.5	534.2	534.9	535.6	536.3	537.0	537.7	538.4	539.1	539.8	540.5	541.2	541.9	542.6	543.3	544.0	544.7	545.4	546.1	546.8	547.5	548.2	548.9	549.6	550.3	551.0	551.7	552.4	553.1	553.8	554.5	555.2	555.9	556.6	557.3	558.0	558.7	559.4	560.1	560.8	561.5	562.2	562.9	563.6	564.3	565.0	565.7	566.4	567.1	567.8	568.5	569.2	569.9	570.6	571.3	572.0	572.7	573.4	574.1	574.8	575.5	576.2	576.9	577.6	578.3	579.0	579.7	580.4	581.1	581.8	582.5	583.2	583.9	584.6	585.3	586.0	586.7	587.4	588.1	588.8	589.5	590.2	590.9	591.6	592.3	593.0	593.7	594.4	595.1	595.8	596.5	597.2	597.9	598.6	599.3	600.0	600.7	601.4	602.1	602.8	603.5	604.2	604.9	605.6	606.3	607.0	607.7	608.4	609.1	609.8	610.5	611.2	611.9	612.6	613.3	614.0	614.7	615.4	616.1	616.8	617.5	618.2	618.9	619.6	620.3	621.0	621.7	622.4	623.1	623.8	624.5	625.2	625.9	626.6	627.3	628.0	628.7	629.4	630.1	630.8	631.5	632.2	632.9	633.6	634.3	635.0	635.7	636.4	637.1	637.8	638.5	639.2	639.9	640.6	641.3	642.0	642.7	643.4	644.1	644.8	645.5	646.2	646.9	647.6	648.3	649.0	649.7	650.4	651.1	651.8	652.5	653.2	653.9	654.6	655.3	656.0	656.7	657.4	658.1	658.8	659.5	660.2	660.9	661.6	662.3	663.0	663.7	664.4	665.1	665.8	666.5	667.2	667.9	668.6	669.3	670.0	670.7	671.4	672.1	672.8	673.5	674.2	674.9	675.6	676.3	677.0	677.7	678.4	679.1	679.8	680.5	681.2	681.9	682.6	683.3	684.0	684.7	685.4	686.1	686.8	687.5	688.2	688.9	689.6	690.3	691.0	691.7	692.4	693.1	693.8	694.5	695.2	695.9	696.6	697.3	698.0	698.7	699.4	700.1	700.8	701.5	702.2	702.9	703.6	704.3	705.0	705.7	706.4	707.1	707.8	708.5	709.2	709.9	710.6	711.3	712.0	712.7	713.4	714.1	714.8	715.5	716.2	716.9	717.6	718.3	719.0	719.7	720.4	721.1	721.8	722.5	723.2	723.9	724.6	725.3	726.0	726.7	727.4	728.1	728.8	729.5	730.2	730.9	731.6	732.3	733.0	733.7	734.4	735.1	735.8	736.5	737.2	737.9	738.6	739.3	740.0	740.7	741.4	742.1	742.8	743.5	744.2	744.9	745.6	746.3	747.0	747.7	748.4	749.1	749.8	750.5	751.2	751.9	752.6	753.3	754.0	754.7	755.4	756.1	756.8	757.5	758.2	758.9	759.6	760.3	761.0	761.7	762.4	763.1	763.8	764.5	765.2	765.9	766.6	767.3	768.0	768.7	769.4	770.1	770.8	771.5	772.2	772.9	773.6	774.3	775.0	775.7	776.4	777.1	777.8	778.5	779.2	779.9	780.6	781.3	782.0	782.7	783.4	784.1	784.8	785.5	786.2	786.9	787.6	788.3	789.0	789.7	790.4	791.1	791.8	792.5	793.2	793.9	794.6	795.3	796.0	796.7	797.4	798.1	798.8	799.5	800.2	800.9	801.6	80

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
		Entering Indoor Wet Bulb Temperature																																			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	29.5	29.9	30.8	-	29.2	29.6	30.5	-	28.5	28.9	29.7	-	27.2	27.6	28.4	-	25.6	26.0	26.8	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-				
	S/T	0.61	0.54	0.42	-	0.62	0.55	0.42	-	0.64	0.57	0.45	-	0.66	0.59	0.47	-	1.00	0.61	0.49	-	1.00	0.66	0.53	-	1.00	0.61	0.49	-	1.00	0.66	0.53	-				
	ΔT	19	17	14	-	19	17	14	-	20	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-	20	18	15	-				
	kW	1.80	1.80	1.79	-	2.00	2.00	1.99	-	2.22	2.22	2.22	-	2.47	2.47	2.46	-	2.74	2.74	2.73	-	3.06	3.06	3.05	-	3.06	3.06	3.05	-	3.06	3.06	3.05	-				
	Amps	6.4	6.4	6.4	-	7.3	7.3	7.3	-	8.4	8.4	8.3	-	9.5	9.5	9.5	-	10.7	10.7	10.7	-	12.2	12.2	12.2	-	12.2	12.2	12.2	-	12.2	12.2	12.2	-				
	Hi PR	244	245	247	-	282	284	285	-	322	324	325	-	366	367	368	-	412	413	415	-	462	463	464	-	462	463	464	-	462	463	464	-				
	Lo PR	120	121	124	-	127	128	131	-	133	135	138	-	139	140	143	-	144	145	148	-	150	152	155	-	150	152	155	-	150	152	155	-				
1000	MBh	29.9	30.3	31.2	-	29.6	30.0	30.9	-	28.9	29.3	30.1	-	27.6	28.0	28.8	-	26.0	26.4	27.2	-	24.5	24.9	25.8	-	24.5	24.9	25.8	-	24.5	24.9	25.8	-				
	S/T	0.64	0.57	0.45	-	0.65	0.58	0.45	-	0.67	0.60	0.48	-	0.69	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-				
	ΔT	18	17	13	-	18	17	13	-	19	17	13	-	18	17	13	-	18	16	13	-	19	17	14	-	19	17	14	-	19	17	14	-				
	kW	1.81	1.80	1.80	-	2.01	2.01	2.00	-	2.23	2.23	2.23	-	2.48	2.47	2.47	-	2.75	2.75	2.74	-	3.07	3.07	3.06	-	3.07	3.07	3.06	-	3.07	3.07	3.06	-				
	Amps	6.4	6.4	6.4	-	7.4	7.4	7.3	-	8.4	8.4	8.4	-	9.5	9.5	9.5	-	10.8	10.8	10.7	-	12.2	12.2	12.2	-	12.2	12.2	12.2	-	12.2	12.2	12.2	-				
	Hi PR	246	247	249	-	284	285	287	-	324	325	327	-	367	368	370	-	414	415	417	-	463	465	466	-	463	465	466	-	463	465	466	-				
	Lo PR	121	123	126	-	129	130	133	-	135	136	139	-	140	142	145	-	145	147	150	-	152	153	156	-	152	153	156	-	152	153	156	-				
1125	MBh	30.5	30.9	31.8	-	30.2	30.6	31.5	-	29.5	29.9	30.7	-	28.2	28.6	29.4	-	26.6	27.0	27.8	-	25.1	25.5	26.4	-	25.1	25.5	26.4	-	25.1	25.5	26.4	-				
	S/T	0.66	0.59	0.46	-	0.66	0.59	0.47	-	0.68	0.61	0.49	-	0.70	0.63	0.51	-	1.00	0.65	0.53	-	1.00	0.70	0.58	-	1.00	0.65	0.53	-	1.00	0.70	0.58	-				
	ΔT	18	16	12	-	17	16	12	-	18	16	12	-	17	16	12	-	17	15	12	-	18	16	13	-	18	16	13	-	18	16	13	-				
	kW	1.81	1.81	1.81	-	2.02	2.01	2.01	-	2.24	2.24	2.24	-	2.48	2.48	2.48	-	2.76	2.75	2.75	-	3.08	3.07	3.07	-	3.08	3.07	3.07	-	3.08	3.07	3.07	-				
	Amps	6.5	6.5	6.5	-	7.4	7.4	7.4	-	8.4	8.4	8.4	-	9.6	9.5	9.5	-	10.8	10.8	10.8	-	12.3	12.3	12.2	-	12.3	12.3	12.2	-	12.3	12.3	12.2	-				
	Hi PR	248	249	251	-	287	288	289	-	327	328	329	-	370	371	372	-	416	417	419	-	466	467	468	-	466	467	468	-	466	467	468	-				
	Lo PR	124	125	128	-	131	132	135	-	137	139	142	-	143	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-	154	156	159	-				

75	900	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.5	28.9	29.8	31.1	27.2	27.6	28.4	29.8	25.6	26.0	26.9	28.2	24.1	24.5	25.4	26.7	
		S/T	0.73	0.66	0.54	0.4	0.74	0.67	0.54	0.4	1.00	0.69	0.57	0.4	1.00	0.71	0.58	0.5	1.00	0.73	0.60	0.5	1.00	0.78	0.65	0.5	
		ΔT	23	22	18	14	23	22	18	14	24	22	18	15	23	22	18	14	23	21	18	14	24	22	19	15	
		kW	1.80	1.80	1.79	1.8	2.00	2.00	1.99	2.0	2.22	2.22	2.22	2.2	2.47	2.47	2.46	2.5	2.74	2.74	2.73	2.7	3.06	3.06	3.05	3.1	
		Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.4	8.4	8.3	8.4	9.5	9.5	9.4	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.2	
75	1000	Hi PR	244	246	247	251.4	283	284	285	289.6	323	324	325	329.7	366	367	369	372.8	412	413	415	419.3	462	463	465	468.9	
		Lo PR	120	121	124	129.3	127	128	131	136.4	133	135	138	142.7	139	140	143	148.0	144	145	148	153.3	150	152	155	159.8	
		MBh	29.9	30.3	31.2	32.5	29.6	30.1	30.9	32.2	28.9	29.3	30.2	31.5	27.6	28.0	28.9	30.2	26.0	26.4	27.3	28.6	24.5	24.9	25.8	27.1	
		S/T	0.76	0.69	0.57	0.4	0.77	0.70	0.57	0.4	1.00	0.72	0.60	0.5	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.81	0.68	0.5	
		ΔT	23	21	17	14	23	21	17	13	23	21	17	14	23	21	17	13	22	20	17	13	23	22	18	14	
75	1000	kW	1.80	1.80	1.80	1.82	2.01	2.00	2.00	2.02	2.23	2.23	2.23	2.24	2.47	2.47	2.47	2.48	2.75	2.74	2.74	2.76	3.07	3.06	3.06	3.08	
		Amps	6.4	6.4	6.4	6.5	7.4	7.4	7.4	7.3	7.4	8.4	8.4	8.4	8.4	9.5	9.5	9.5	9.6	10.8	10.7	10.7	10.8	12.2	12.2	12.2	12.3
		Hi PR	246	247	249	253.2	284	285	287	291.4	324	326	327	331.5	368	369	370	374.6	414	415	417	421.0	464	465	466	470.6	
		Lo PR	121	123	126	130.9	129	130	133	138.1	135	136	139	144.4	140	142	145	149.7	145	147	150	154.9	152	153	156	161.5	
		MBh	30.5	30.9	31.8	33.1	30.2	30.7	31.5	32.9	29.5	29.9	30.8	32.1	28.2	28.6	29.5	30.8	26.6	27.0	27.9	29.2	25.1	25.5	26.4	27.7	
1125	1125	S/T	0.77	0.70	0.58	0.4	0.78	0.71	0.59	0.5	1.00	0.73	0.61	0.5	1.00	0.75	0.63	0.5	1.00	0.77	0.65	0.5	1.00	1.00	0.69	0.6	
		ΔT	22	20	16	13	22	20	16	13	22	20	16	13	22	20	16	13	21	19	16	12	23	21	17	13	
		kW	1.81	1.81	1.81	1.8	2.01	2.01	2.01	2.0	2.24	2.24	2.23	2.3	2.48	2.48	2.48	2.5	2.76	2.75	2.75	2.8	3.07	3.07	3.07	3.1	
		Amps	6.5	6.5	6.5	6.5	7.4	7.4	7.4	7.4	7.5	8.4	8.4	8.4	8.5	9.5	9.5	9.5	9.6	10.8	10.8	10.8	10.8	12.3	12.2	12.2	12.3
		Hi PR	248	250	251	255.5	287	288	289	293.7	327	328	330	333.7	370	371	373	376.8	416	417	419	423.3	466	467	469	472.9	
1125	1125	Lo PR	124	125	128	133.4	131	133	136	140.5	137	139	142	146.8	143	144	147	152.1	148	149	152	157.4	154	156	159	163.9	

		Outdoor Ambient Temperature																													
		65					75					85					95					105					115				
IDB	Airflow	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
80		Entering Indoor Wet Bulb Temperature																													
	MBh	29.6	30.1	30.9	32.3	29.4	29.8	30.7	32.0	28.6	29.0	29.9	31.2	27.3	27.7	28.6	29.9	25.7	26.1	27.0	28.3	24.3	24.7	25.5	26.9						
	S/T	0.85	0.78	0.65	0.5	1.00	0.78	0.66	0.5	1.00	0.81	0.68	0.6	1.00	0.83	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.77	0.6						
	ΔT	28	26	22	19	28	26	22	19	28	26	22	19	28	26	22	19	27	25	22	18	29	27	23	19						
	kW	1.80	1.80	1.79	1.8	2.00	2.00	1.99	2.0	2.22	2.22	2.22	2.2	2.47	2.47	2.46	2.5	2.74	2.74	2.73	2.7	3.06	3.06	3.05	3.1						
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.4	8.4	8.3	8.4	9.5	9.5	9.5	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.2						
	Hi PR	245	246	248	251.9	283	284	286	290.1	323	324	326	330.1	366	367	369	373.2	413	414	415	419.7	462	463	465	469.3						
	Lo PR	120	122	125	129.8	127	129	132	137.0	134	135	138	143.2	139	141	144	148.6	144	146	149	153.8	151	152	155	160.3						
1000	MBh	30.1	30.5	31.3	32.7	29.8	30.2	31.1	32.4	29.0	29.4	30.3	31.6	27.7	28.1	29.0	30.3	26.1	26.5	27.4	28.7	24.7	25.1	25.9	27.3						
	S/T	0.88	0.81	0.68	0.6	1.00	0.81	0.69	0.6	1.00	0.84	0.71	0.6	1.00	0.85	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.80	0.7						
	ΔT	27	25	21	18	27	25	21	18	27	25	22	18	27	25	21	18	27	25	21	17	28	26	22	19						
	kW	1.81	1.80	1.80	1.82	2.01	2.01	2.00	2.02	2.23	2.23	2.23	2.24	2.48	2.47	2.47	2.49	2.75	2.75	2.74	2.76	3.07	3.06	3.06	3.08						
	Amps	6.4	6.4	6.4	6.5	7.4	7.4	7.3	7.4	8.4	8.4	8.4	8.4	9.5	9.5	9.5	9.6	10.8	10.8	10.7	10.8	12.2	12.2	12.2	12.3						
	Hi PR	247	248	249	253.6	285	286	288	291.9	325	326	328	331.9	368	369	371	375.0	415	416	417	421.5	464	465	467	471.1						
	Lo PR	122	123	126	131.5	129	131	134	138.6	135	137	140	144.9	141	142	145	150.3	146	147	150	155.5	153	154	157	162.0						
1125	MBh	30.7	31.1	31.9	33.3	30.4	30.8	31.7	33.0	29.6	30.0	30.9	32.2	28.3	28.7	29.6	30.9	26.7	27.1	28.0	29.3	25.3	25.7	26.6	27.9						
	S/T	1.00	0.82	0.70	0.6	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7						
	ΔT	26	24	20	17	26	24	20	17	26	24	21	17	26	24	20	17	26	24	20	16	27	25	21	18						
	kW	1.81	1.81	1.81	1.8	2.02	2.01	2.01	2.0	2.24	2.24	2.24	2.3	2.48	2.48	2.48	2.5	2.76	2.75	2.75	2.8	3.08	3.07	3.07	3.1						
	Amps	6.5	6.5	6.5	6.5	7.4	7.4	7.4	7.5	8.4	8.4	8.4	8.4	9.6	9.5	9.5	9.6	10.8	10.8	10.8	10.8	12.3	12.3	12.2	12.3						
	Hi PR	249	250	252	255.9	287	288	290	294.1	327	328	330	334.2	370	371	373	377.3	417	418	420	423.8	466	467	469	473.4						
	Lo PR	124	126	129	133.9	132	133	136	141.1	138	139	142	147.3	143	145	148	152.7	148	150	153	157.9	155	156	159	164.4						

900	MBh	30.1	30.5	31.4	32.7	29.9	30.3	31.2	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.8	25.2	26.0	27.4
	S/T	1.00	0.87	0.75	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.7
	ΔT	31	30	26	22	31	29	26	22	32	30	26	23	31	29	26	22	31	29	26	22	32	30	27	23
	kW	1.80	1.80	1.80	1.8	2.00	2.00	2.00	2.0	2.23	2.23	2.22	2.2	2.47	2.47	2.47	2.5	2.74	2.74	2.74	2.8	3.06	3.06	3.06	3.1
	Amps	6.4	6.4	6.4	6.5	7.4	7.3	7.3	7.4	8.4	8.4	8.4	8.4	9.5	9.5	9.5	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.2
	Hi PR	246	247	249	253.0	284	285	287	291.2	324	325	327	331.3	367	368	370	374.4	414	415	417	420.9	463	465	466	470.5
	Lo PR	122	124	127	131.5	129	131	134	138.7	136	137	140	145.0	141	142	145	150.3	146	148	151	155.5	153	154	157	162.1
1000	MBh	30.5	31.0	31.8	33.1	30.3	30.7	31.6	32.9	29.5	29.9	30.8	32.1	28.2	28.6	29.5	30.8	26.6	27.0	27.9	29.2	25.2	25.6	26.4	27.8
	S/T	1.00	0.90	0.78	0.6	1.00	0.91	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.8	
	ΔT	31	29	25	21	30	29	25	21	31	29	25	22	30	29	25	21	30	28	25	21	31	30	26	22
	kW	1.81	1.81	1.80	1.82	2.01	2.01	2.01	2.02	2.24	2.23	2.23	2.25	2.48	2.48	2.47	2.49	2.75	2.75	2.75	2.76	3.07	3.07	3.07	3.08
	Amps	6.5	6.5	6.4	6.5	7.4	7.4	7.4	7.4	8.4	8.4	8.4	8.5	9.5	9.5	9.5	9.6	10.8	10.8	10.8	10.8	12.2	12.2	12.2	12.3
	Hi PR	248	249	251	254.8	286	287	289	293.0	326	327	329	333.0	369	370	372	376.2	416	417	418	422.6	465	466	468	472.2
	Lo PR	124	125	128	133.2	131	132	135	140.4	137	139	142	146.7	143	144	147	152.0	148	149	152	157.2	154	156	159	163.8
1125	MBh	31.1	31.6	32.4	33.8	30.9	31.3	32.2	33.5	30.1	30.5	31.4	32.7	28.8	29.2	30.1	31.4	27.2	27.6	28.5	29.8	25.8	26.2	27.0	28.4
	S/T	1.00	0.91	0.79	0.7	1.00	0.92	0.79	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.8	
	ΔT	30	28	24	20	30	28	24	20	30	28	24	21	30	28	24	20	29	27	24	20	30	29	25	21
	kW	1.82	1.82	1.81	1.8	2.02	2.02	2.01	2.0	2.24	2.24	2.24	2.3	2.49	2.49	2.48	2.5	2.76	2.76	2.75	2.8	3.08	3.08	3.07	3.1
	Amps	6.5	6.5	6.5	6.6	7.4	7.4	7.4	7.5	8.5	8.4	8.4	8.5	9.6	9.6	9.5	9.6	10.8	10.8	10.8	10.9	12.3	12.3	12.3	12.3
	Hi PR	250	251	253	257.1	288	289	291	295.3	328	329	331	335.3	371	372	374	378.4	418	419	421	424.9	468	469	470	474.5
	Lo PR	126	128	131	135.7	133	135	138	142.8	140	141	144	149.1	145	146	149	154.4	150	152	155	159.7	157	158	161	166.2

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	85	59	63	67	71	95	59	63	67	71	105	59	63	67	71	115
70	MBh	34.9	35.4	36.5	-	-	34.6	35.1	36.1	-	-	33.7	34.2	35.2	-	-	32.1	32.6	33.7	-	-	30.2	30.7	31.8	-	-	28.5	29.0	30.0	-	-
	S/T	0.61	0.54	0.41	-	-	0.62	0.54	0.41	-	-	0.64	0.57	0.44	-	-	0.66	0.59	0.45	-	-	0.68	0.61	0.48	-	-	1.00	0.66	0.53	-	-
	ΔT	20	18	15	-	-	20	18	15	-	-	21	19	15	-	-	20	18	15	-	-	20	18	15	-	-	21	19	16	-	-
	kW	2.15	2.15	2.15	-	-	2.39	2.39	2.39	-	-	2.66	2.65	2.65	-	-	2.94	2.94	2.94	-	-	3.26	3.26	3.26	-	-	3.64	3.64	3.63	-	-
	Amps	7.5	7.5	7.5	-	-	8.6	8.6	8.6	-	-	9.8	9.8	9.8	-	-	11.1	11.1	11.1	-	-	12.6	12.6	12.6	-	-	14.3	14.3	14.3	-	-
	Hi PR	246	247	248	-	-	284	285	287	-	-	325	326	328	-	-	368	369	371	-	-	415	417	418	-	-	466	467	468	-	-
	Lo PR	119	120	123	-	-	126	127	130	-	-	132	134	137	-	-	138	139	142	-	-	143	144	147	-	-	149	151	154	-	-
70	MBh	35.3	35.7	36.8	-	-	34.9	35.4	36.5	-	-	34.0	34.5	35.6	-	-	32.5	33.0	34.0	-	-	30.6	31.0	32.1	-	-	28.8	29.3	30.3	-	-
	S/T	0.65	0.57	0.44	-	-	0.66	0.58	0.45	-	-	0.68	0.61	0.47	-	-	0.70	0.62	0.49	-	-	1.00	0.65	0.51	-	-	1.00	0.70	0.56	-	-
	ΔT	20	18	14	-	-	19	18	14	-	-	20	18	14	-	-	19	18	14	-	-	19	17	14	-	-	20	18	15	-	-
	kW	2.16	2.16	2.16	-	-	2.40	2.40	2.39	-	-	2.66	2.66	2.66	-	-	2.95	2.95	2.94	-	-	3.27	3.27	3.26	-	-	3.65	3.64	3.64	-	-
	Amps	7.6	7.6	7.5	-	-	8.7	8.7	8.6	-	-	9.9	9.9	9.8	-	-	11.2	11.2	11.2	-	-	12.6	12.6	12.6	-	-	14.4	14.4	14.3	-	-
	Hi PR	247	248	250	-	-	286	287	289	-	-	326	327	329	-	-	370	371	373	-	-	417	418	420	-	-	467	468	470	-	-
	Lo PR	120	122	125	-	-	127	129	132	-	-	134	135	138	-	-	139	140	143	-	-	144	146	149	-	-	151	152	155	-	-
1350	MBh	36.0	36.5	37.6	-	-	35.7	36.2	37.3	-	-	34.8	35.3	36.4	-	-	33.3	33.8	34.8	-	-	31.4	31.8	32.9	-	-	29.6	30.1	31.1	-	-
	S/T	0.69	0.61	0.48	-	-	0.69	0.62	0.49	-	-	0.72	0.65	0.51	-	-	0.74	0.66	0.53	-	-	1.00	0.69	0.55	-	-	1.00	0.74	0.60	-	-
	ΔT	18	16	13	-	-	18	16	13	-	-	18	17	13	-	-	18	16	13	-	-	18	16	12	-	-	19	17	14	-	-
	kW	2.18	2.17	2.17	-	-	2.41	2.41	2.41	-	-	2.68	2.68	2.67	-	-	2.96	2.96	2.96	-	-	3.28	3.28	3.28	-	-	3.66	3.66	3.65	-	-
	Amps	7.6	7.6	7.6	-	-	8.7	8.7	8.7	-	-	9.9	9.9	9.9	-	-	11.2	11.2	11.2	-	-	12.7	12.7	12.7	-	-	14.4	14.4	14.4	-	-
	Hi PR	250	251	253	-	-	289	290	291	-	-	329	330	332	-	-	373	374	375	-	-	420	421	422	-	-	470	471	473	-	-
	Lo PR	123	124	127	-	-	130	131	134	-	-	136	138	141	-	-	142	143	146	-	-	147	148	151	-	-	153	155	158	-	-

75	MBh	34.9	35.4	36.5	38.1	-	34.6	35.1	36.2	37.8	-	33.7	34.2	35.3	36.8	-	32.2	32.7	33.7	35.3	-	30.3	30.7	31.8	33.4	-	28.5	29.0	30.0	31.6
	S/T	0.74	0.66	0.53	0.4	-	0.74	0.67	0.54	0.4	-	0.77	0.69	0.56	0.4	-	1.00	0.71	0.58	0.4	-	1.00	0.73	0.60	0.5	-	1.00	0.78	0.65	0.5
	ΔT	25	23	19	15	-	24	23	19	15	-	25	23	19	16	-	24	23	19	15	-	24	22	19	15	-	25	23	20	16
	kW	2.15	2.15	2.15	2.2	-	2.39	2.39	2.38	2.4	-	2.65	2.65	2.65	2.7	-	2.94	2.94	2.93	3.0	-	3.26	3.26	3.26	3.3	-	3.64	3.63	3.63	3.6
	Amps	7.5	7.5	7.5	7.6	-	8.6	8.6	8.6	8.7	-	9.8	9.8	9.8	9.9	-	11.1	11.1	11.1	11.2	-	12.6	12.6	12.6	12.7	-	14.3	14.3	14.3	14.4
	Hi PR	246	247	249	252.9	-	285	286	287	291.6	-	325	326	328	332.1	-	369	370	371	375.7	-	416	417	418	422.7	-	466	467	469	472.9
75	Lo PR	119	120	123	128.4	-	126	128	131	135.6	-	132	134	137	141.9	-	138	139	142	147.2	-	143	144	147	152.4	-	149	151	154	159.0
	MBh	35.3	35.8	36.8	38.4	-	35.0	35.5	36.5	38.1	-	34.1	34.5	35.6	37.2	-	32.5	33.0	34.0	35.6	-	30.6	31.1	32.1	33.7	-	28.8	29.3	30.4	32.0
	S/T	0.77	0.70	0.57	0.4	-	0.78	0.71	0.57	0.4	-	1.00	0.73	0.60	0.5	-	1.00	0.75	0.62	0.5	-	1.00	0.77	0.64	0.5	-	1.00	0.82	0.69	0.6
	ΔT	24	22	18	15	-	24	22	18	15	-	24	22	18	15	-	24	22	18	14	-	23	22	18	14	-	25	23	19	15
	kW	2.16	2.16	2.15	2.17	-	2.40	2.40	2.39	2.41	-	2.66	2.66	2.66	2.67	-	2.95	2.95	2.94	2.96	-	3.27	3.27	3.26	3.28	-	3.64	3.64	3.64	3.66
	Amps	7.6	7.6	7.5	7.6	-	8.7	8.6	8.6	8.7	-	9.9	9.9	9.8	9.9	-	11.2	11.2	11.1	11.2	-	12.6	12.6	12.6	12.7	-	14.4	14.4	14.3	14.4
1350	Hi PR	247	248	250	254.4	-	286	287	289	293.0	-	326	328	329	333.5	-	370	371	373	377.1	-	417	418	420	424.1	-	467	468	470	474.3
	Lo PR	120	122	125	129.6	-	127	129	132	136.8	-	134	135	138	143.1	-	139	140	143	148.4	-	144	146	149	153.7	-	151	152	155	160.2
	MBh	36.1	36.6	37.6	39.2	-	35.8	36.2	37.3	38.9	-	34.8	35.3	36.4	38.0	-	33.3	33.8	34.8	36.4	-	31.4	31.9	32.9	34.5	-	29.6	30.1	31.2	32.7
	S/T	0.81	0.74	0.61	0.5	-	0.82	0.75	0.61	0.5	-	1.00	0.77	0.64	0.5	-	1.00	0.79	0.66	0.5	-	1.00	0.81	0.68	0.5	-	1.00	1.00	0.73	0.6
	ΔT	22	21	17	13	-	22	20	17	13	-	23	21	17	13	-	22	20	17	13	-	22	20	17	13	-	23	21	18	14
	kW	2.17	2.17	2.17	2.2	-	2.41	2.41	2.41	2.4	-	2.68	2.67	2.67	2.7	-	2.96	2.96	2.96	3.0	-	3.28	3.28	3.28	3.3	-	3.66	3.66	3.65	3.7
1350	Amps	7.6	7.6	7.6	7.7	-	8.7	8.7	8.7	8.8	-	9.9	9.9	9.9	10.0	-	11.2	11.2	11.2	11.3	-	12.7	12.7	12.7	12.8	-	14.4	14.4	14.4	14.5
	Hi PR	250	251	253	257.2	-	289	290	292	295.8	-	329	330	332	336.3	-	373	374	376	379.9	-	420	421	423	427.0	-	470	471	473	477.1
	Lo PR	123	124	127	132.3	-	130	131	134	139.5	-	136	138	141	145.8	-	142	143	146	151.2	-	147	148	151	156.4	-	153	155	158	163.0

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

			OUTDOOR AMBIENT TEMPERATURE																													
			65					75					85					95					105					115				
IDB	AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1050	MBh	35.1	35.6	36.7	38.2	34.8	35.3	36.3	37.9	33.9	34.4	35.4	37.0	32.3	32.8	33.9	35.5	30.4	30.9	32.0	33.6	28.7	29.2	30.2	31.8	28.7	29.2	30.2	31.8		
		S/T	0.86	0.79	0.65	0.5	1.00	0.79	0.66	0.5	1.00	0.82	0.68	0.5	1.00	0.83	0.70	0.6	1.00	0.86	0.72	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.77	0.6		
		ΔT	29	27	23	20	29	27	23	20	29	27	23	20	29	27	23	19	28	27	23	19	30	28	24	20	30	28	24	20		
		kW	2.15	2.15	2.15	2.2	2.39	2.39	2.38	2.4	2.66	2.65	2.65	2.7	2.94	2.94	2.94	3.0	3.26	3.26	3.26	3.3	3.64	3.64	3.63	3.6	3.64	3.64	3.63	3.6		
		Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4	14.3	14.3	14.3	14.4		
		Hi PR	246	247	249	253.4	285	286	288	292.0	325	327	328	332.5	369	370	372	376.1	416	417	419	423.2	466	467	469	473.3	466	467	469	473.3		
80	1150	Lo PR	119	121	124	128.9	127	128	131	136.1	133	134	137	142.4	138	140	143	147.7	143	145	148	153.0	150	151	154	159.5	150	151	154	159.5		
		MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.3	34.2	34.7	35.8	37.4	32.7	33.2	34.2	35.8	30.8	31.2	32.3	33.9	29.0	29.5	30.5	32.1	29.0	29.5	30.5	32.1		
		S/T	0.90	0.82	0.69	0.6	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.81	0.7		
		ΔT	28	26	22	19	28	26	22	19	28	26	23	19	28	26	22	19	28	26	22	18	29	27	23	20	29	27	23	20		
		kW	2.16	2.16	2.16	2.17	2.40	2.40	2.39	2.41	2.66	2.66	2.66	2.68	2.95	2.95	2.95	2.96	3.27	3.27	3.26	3.28	3.65	3.64	3.64	3.66	3.65	3.64	3.64	3.66		
		Amps	7.6	7.6	7.5	7.6	8.7	8.7	8.6	8.7	9.9	9.9	9.8	9.9	11.2	11.2	11.2	11.2	12.6	12.6	12.6	12.7	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4		
	1350	Hi PR	248	249	251	254.8	286	287	289	293.5	327	328	330	334.0	371	372	373	377.6	418	419	420	424.6	468	469	471	474.8	468	469	471	474.8		
		Lo PR	121	122	125	130.1	128	129	132	137.3	134	136	139	143.6	139	141	144	148.9	145	146	149	154.2	151	153	156	160.7	151	153	156	160.7		
		MBh	36.2	36.7	37.8	39.4	35.9	36.4	37.5	39.1	35.0	35.5	36.6	38.1	33.5	34.0	35.0	36.6	31.6	32.0	33.1	34.7	29.8	30.3	31.3	32.9	29.8	30.3	31.3	32.9		
		S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.6	1.00	0.91	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7		
		ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18	28	26	22	18		
		kW	2.18	2.17	2.17	2.2	2.41	2.41	2.41	2.4	2.68	2.68	2.67	2.7	2.96	2.96	2.96	3.0	3.28	3.28	3.28	3.3	3.66	3.66	3.65	3.7	3.66	3.66	3.65	3.7		
	1350	Amps	7.6	7.6	7.6	7.7	8.7	8.7	8.7	8.8	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.3	12.7	12.7	12.7	12.8	14.4	14.4	14.4	14.5	14.4	14.4	14.4	14.5		
		Hi PR	251	252	253	257.6	289	290	292	296.3	330	331	333	336.8	373	374	376	380.4	420	421	423	427.4	471	472	473	477.6	471	472	473	477.6		
		Lo PR	123	125	128	132.9	131	132	135	140.1	137	138	141	146.4	142	144	147	151.7	147	149	152	156.9	154	155	158	163.5	154	155	158	163.5		

1050	MBh	35.7	36.2	37.2	38.8	35.4	35.9	36.9	38.5	34.5	35.0	36.0	37.6	32.9	33.4	34.5	36.0	31.0	31.5	32.5	34.1	29.3	29.8	30.8	32.4
	S/T	1.00	0.88	0.75	0.6	1.00	0.89	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.87	0.7
	ΔT	33	31	27	23	32	31	27	23	33	31	27	24	32	31	27	23	32	30	27	23	33	31	28	24
	kW	2.16	2.16	2.15	2.2	2.40	2.39	2.39	2.4	2.66	2.66	2.65	2.7	2.95	2.94	2.94	3.0	3.27	3.26	3.26	3.3	3.64	3.64	3.64	3.7
	Amps	7.6	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.9	9.8	9.8	9.9	11.2	11.2	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4
	Hi PR	247	249	250	254.5	286	287	289	293.2	327	328	329	333.7	370	371	373	377.3	417	418	420	424.3	467	469	470	474.5
1150	Lo PR	121	123	126	130.7	128	130	133	137.9	135	136	139	144.2	140	141	144	149.5	145	147	150	154.7	152	153	156	161.3
	MBh	36.0	36.5	37.6	39.2	35.7	36.2	37.3	38.8	34.8	35.3	36.3	37.9	33.3	33.7	34.8	36.4	31.3	31.8	32.9	34.5	29.6	30.1	31.1	32.7
	S/T	1.00	0.92	0.79	0.7	1.00	0.93	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.91	0.8
	ΔT	32	30	26	23	32	30	26	22	32	30	26	23	32	30	26	22	31	29	26	22	33	31	27	23
	kW	2.17	2.16	2.16	2.18	2.40	2.40	2.40	2.42	2.67	2.67	2.66	2.68	2.95	2.95	2.95	2.97	3.28	3.27	3.27	3.29	3.65	3.65	3.64	3.66
	Amps	7.6	7.6	7.6	7.7	8.7	8.7	8.7	8.7	9.9	9.9	9.9	9.9	11.2	11.2	11.2	11.3	12.7	12.7	12.6	12.7	14.4	14.4	14.4	14.4
1350	Hi PR	249	250	252	256.0	288	289	290	294.6	328	329	331	335.1	372	373	374	378.7	419	420	421	425.7	469	470	472	475.9
	Lo PR	122	124	127	131.9	130	131	134	139.1	136	137	140	145.4	141	143	146	150.7	146	148	151	155.9	153	154	157	162.5
	MBh	36.8	37.3	38.4	39.9	36.5	37.0	38.1	39.6	35.6	36.1	37.1	38.7	34.0	34.5	35.6	37.2	32.1	32.6	33.7	35.3	30.4	30.9	31.9	33.5
	S/T	1.00	0.96	0.83	0.7	1.00	0.97	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.90	0.8	1.00	1.00	0.91	0.8
	ΔT	30	29	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22
	kW	2.18	2.18	2.17	2.2	2.42	2.42	2.41	2.4	2.68	2.68	2.68	2.7	2.97	2.97	2.96	3.0	3.29	3.29	3.28	3.3	3.66	3.66	3.66	3.7
1350	Amps	7.7	7.6	7.6	7.7	8.7	8.7	8.7	8.8	10.0	9.9	9.9	10.0	11.3	11.3	11.2	11.3	12.7	12.7	12.7	12.8	14.4	14.4	14.4	14.5
	Hi PR	252	253	255	258.8	290	291	293	297.4	331	332	334	337.9	374	376	377	381.5	422	423	424	428.6	472	473	474	478.7
	Lo PR	125	127	130	134.6	132	134	137	141.8	139	140	143	148.1	144	145	148	153.5	149	151	154	158.7	156	157	160	165.2

75	1300	MBh	40.7	41.3	42.5	44.3	40.4	40.9	42.1	44.0	39.3	39.9	41.1	42.9	37.5	38.1	39.3	41.1	35.3	35.9	37.1	38.9	33.3	33.9	35.1	36.9	
		S/T	0.79	0.71	0.58	0.4	0.79	0.72	0.58	0.4	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	1.00	0.70	0.6	
		ΔT	24	22	18	15	24	22	18	15	24	22	18	15	24	22	18	15	24	23	22	18	14	25	23	19	15
		kW	2.48	2.48	2.48	2.5	2.76	2.76	2.75	2.8	3.07	3.07	3.06	3.1	3.41	3.40	3.40	3.4	3.78	3.78	3.77	3.8	4.22	4.22	4.21	4.2	
		Amps	8.7	8.7	8.7	8.8	10.0	10.0	10.0	10.1	11.4	11.4	11.4	11.5	13.0	13.0	12.9	13.0	14.7	14.7	14.7	14.7	16.7	16.7	16.7	16.8	
		Hi PR	251	252	254	258.3	290	291	293	297.5	331	333	334	338.6	376	377	379	382.9	424	425	426	430.7	474	476	477	481.6	
	Lo PR	123	124	128	132.7	130	132	135	140.0	137	138	141	146.5	142	144	147	152.0	148	149	152	157.3	154	156	159	164.0		
	1400	MBh	41.1	41.7	42.9	44.7	40.8	41.3	42.5	44.4	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.7	34.2	35.4	37.3	
		S/T	0.81	0.73	0.60	0.5	0.81	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	0.81	0.67	0.5	1.00	1.00	0.72	0.6	
		ΔT	23	21	18	14	23	21	18	14	23	21	18	14	23	21	18	14	23	21	17	14	24	22	19	15	
		kW	2.49	2.49	2.48	2.50	2.77	2.77	2.76	2.78	3.08	3.08	3.07	3.09	3.41	3.41	3.41	3.43	3.79	3.79	3.78	3.80	4.23	4.23	4.22	4.24	
		Amps	8.8	8.8	8.7	8.8	10.0	10.0	10.0	10.1	11.5	11.5	11.4	11.5	13.0	13.0	13.0	13.1	14.7	14.7	14.7	14.8	16.7	16.7	16.7	16.8	
Hi PR		252	253	255	259.5	292	293	294	298.8	333	334	336	339.9	377	378	380	384.2	425	426	428	431.9	476	477	479	482.9		
Lo PR	124	126	129	133.9	131	133	136	141.2	138	139	143	147.7	143	145	148	153.1	149	150	153	158.5	155	157	160	165.2			
1575	MBh	41.9	42.5	43.7	45.5	41.5	42.1	43.3	45.1	40.5	41.0	42.2	44.1	38.7	39.2	40.4	42.3	36.5	37.0	38.2	40.1	34.4	35.0	36.2	38.1		
	S/T	0.83	0.75	0.62	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	0.80	0.67	0.5	1.00	0.83	0.69	0.6	1.00	1.00	0.74	0.6		
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	18	14		
	kW	2.50	2.50	2.50	2.5	2.78	2.78	2.77	2.8	3.09	3.09	3.08	3.1	3.43	3.42	3.42	3.4	3.80	3.80	3.79	3.8	4.24	4.24	4.23	4.3		
	Amps	8.8	8.8	8.8	8.9	10.1	10.1	10.1	10.2	11.5	11.5	11.5	11.6	13.1	13.1	13.0	13.1	14.8	14.8	14.7	14.8	16.8	16.8	16.8	16.9		
	Hi PR	255	256	257	261.8	294	295	297	301.0	335	336	338	342.1	379	380	382	386.4	427	428	430	434.2	478	479	481	485.1		
Lo PR	126	128	131	136.2	134	135	138	143.5	140	142	145	150.0	146	147	150	155.5	151	153	156	160.8	158	159	162	167.5			

[illegible]

75	1480	MBh	46.4	47.0	48.4	50.5	46.0	46.6	48.0	50.1	44.8	45.4	46.8	48.9	42.7	43.4	44.7	46.8	40.2	40.9	42.2	44.3	37.9	38.6	39.9	42.0	
		S/T	0.77	0.70	0.57	0.4	0.78	0.71	0.57	0.4	1.00	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.82	0.69	0.5	
		ΔT	24	22	19	15	24	22	18	15	24	22	19	15	24	22	18	15	24	24	22	18	14	25	23	19	16
		kW	2.94	2.94	2.93	3.0	3.28	3.27	3.27	3.3	3.65	3.65	3.64	3.7	4.05	4.05	4.05	4.1	4.51	4.50	4.50	4.5	5.04	5.03	5.03	5.1	
		Amps	10.5	10.5	10.4	10.6	12.0	12.0	12.0	12.1	13.7	13.7	13.7	13.8	15.6	15.6	15.5	15.6	17.6	17.6	17.6	17.7	20.1	20.0	20.0	20.1	
		Hi PR	260	261	263	267.5	301	302	304	308.2	343	344	346	350.8	389	390	392	396.6	439	440	442	446.1	491	493	494	498.9	
		Lo PR	121	123	126	131.1	129	130	133	138.4	135	137	140	144.8	141	142	145	150.2	146	147	150	155.4	152	154	157	162.1	
	1600	MBh	46.8	47.5	48.9	50.9	46.4	47.1	48.4	50.5	45.2	45.9	47.3	49.3	43.2	43.8	45.2	47.3	40.7	41.3	42.7	44.8	38.4	39.0	40.4	42.5	
		S/T	0.80	0.72	0.59	0.5	0.80	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	1.00	0.71	0.6	
		ΔT	23	21	18	14	23	21	18	14	24	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	
kW		2.95	2.95	2.94	2.97	3.29	3.28	3.28	3.30	3.66	3.66	3.65	3.68	4.06	4.06	4.06	4.08	4.52	4.51	4.51	4.53	5.04	5.04	5.04	5.06		
Amps		10.5	10.5	10.5	10.6	12.0	12.0	12.0	12.1	13.8	13.7	13.7	13.8	15.6	15.6	15.6	15.7	17.7	17.7	17.6	17.7	20.1	20.1	20.1	20.2		
Hi PR		261	263	264	268.9	302	303	305	309.5	345	346	348	352.1	391	392	394	398.0	440	441	443	447.5	493	494	496	500.3		
Lo PR		123	124	127	132.3	130	131	135	139.6	136	138	141	146.0	142	143	146	151.4	147	149	152	156.7	154	155	158	163.3		
1800	MBh	47.7	48.4	49.7	51.8	47.3	48.0	49.3	51.4	46.1	46.8	48.1	50.2	44.1	44.7	46.1	48.2	41.5	42.2	43.6	45.6	39.3	39.9	41.3	43.4		
	S/T	0.82	0.74	0.61	0.5	0.82	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.73	0.6		
	ΔT	22	21	17	13	22	20	17	13	23	21	17	13	22	20	17	13	22	20	17	13	23	21	18	14		
	kW	2.97	2.96	2.96	3.0	3.30	3.30	3.29	3.3	3.67	3.67	3.67	3.7	4.08	4.08	4.07	4.1	4.53	4.53	4.52	4.5	5.06	5.06	5.05	5.1		
	Amps	10.6	10.6	10.5	10.7	12.1	12.1	12.1	12.2	13.8	13.8	13.8	13.9	15.7	15.7	15.6	15.8	17.7	17.7	17.7	17.8	20.2	20.1	20.1	20.2		
	Hi PR	264	265	267	271.2	304	306	307	311.8	347	348	350	354.5	393	394	396	400.3	442	443	445	449.8	495	496	498	502.6		
	Lo PR	125	126	130	134.6	132	134	137	141.9	139	140	143	148.3	144	146	149	153.7	149	151	154	159.0	156	157	160	165.6		

[illegible]

		65										75										85										95										105										115									
		OUTDOOR AMBIENT TEMPERATURE																																																											
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																												
1480	MBh	46.6	47.3	48.6	50.7	46.2	46.9	48.2	50.3	45.0	45.7	47.0	49.1	43.0	43.6	45.0	47.1	40.5	41.1	42.5	44.6	38.2	38.8	40.2	42.3	38.2	38.8	40.2	42.3	38.2	38.8	40.2	42.3																												
	S/T	0.90	0.82	0.69	0.6	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.81	0.7																												
	ΔT	28	26	23	19	28	26	23	19	29	27	23	19	28	26	23	19	28	26	22	19	29	27	24	20	29	27	24	20	29	27	24	20																												
	kW	2.94	2.94	2.94	3.0	3.28	3.28	3.27	3.3	3.65	3.65	3.64	3.7	4.06	4.05	4.05	4.1	4.51	4.50	4.50	4.5	5.04	5.03	5.03	5.1	5.04	5.03	5.03	5.1	5.04	5.03	5.03	5.1																												
	Amps	10.5	10.5	10.4	10.6	12.0	12.0	12.0	12.1	13.7	13.7	13.7	13.8	15.6	15.6	15.5	15.6	17.6	17.6	17.6	17.7	20.1	20.0	20.0	20.1	20.1	20.0	20.0	20.1	20.1	20.0	20.0	20.1																												
	Hi PR	261	262	263	268.0	301	302	304	308.6	344	345	347	351.2	390	391	393	397.1	439	440	442	446.6	492	493	493	499.4	492	493	493	499	499.4	493	493	499	499.4																											
1600	Lo PR	122	123	127	131.6	129	131	134	138.9	136	137	140	145.3	141	143	146	150.7	146	148	151	156.0	153	154	158	162.6	153	154	158	162.6	153	154	158	162.6																												
	MBh	47.1	47.7	49.1	51.2	46.7	47.3	48.7	50.8	45.5	46.1	47.5	49.6	43.4	44.1	45.4	47.5	40.9	41.5	42.9	45.0	38.6	39.3	40.6	42.7	38.6	39.3	40.6	42.7	38.6	39.3	40.6	42.7																												
	S/T	1.00	0.85	0.71	0.6	1.00	0.85	0.72	0.6	1.00	0.88	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.84	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.84	0.7																												
	ΔT	28	26	22	18	28	26	22	18	28	26	22	19	28	26	22	18	27	25	22	18	29	27	23	19	29	27	23	19	29	27	23	19																												
	kW	2.95	2.95	2.95	2.97	3.29	3.29	3.28	3.31	3.66	3.66	3.65	3.68	4.07	4.06	4.06	4.08	4.52	4.51	4.51	4.53	5.05	5.04	5.04	5.06	5.05	5.04	5.04	5.06	5.05	5.04	5.04	5.06																												
	Amps	10.5	10.5	10.5	10.6	12.1	12.0	12.0	12.1	13.8	13.8	13.7	13.8	15.6	15.6	15.6	15.7	17.7	17.7	17.6	17.8	20.1	20.1	20.1	20.2	20.1	20.1	20.1	20.2	20.1	20.1	20.1	20.2																												
1800	Hi PR	262	263	265	269.3	303	304	306	310.0	345	346	348	352.6	391	392	394	398.5	441	442	443	447.9	493	494	496	500.7	493	494	496	500.7	493	494	496	500.7																												
	Lo PR	123	125	128	132.9	131	132	135	140.1	137	138	141	146.5	142	144	147	151.9	148	149	152	157.2	154	156	159	163.8	154	156	159	163.8	154	156	159	163.8																												
	MBh	48.0	48.6	50.0	52.1	47.5	48.2	49.6	51.7	46.4	47.0	48.4	50.5	44.3	44.9	46.3	48.4	41.8	42.4	43.8	45.9	39.5	40.1	41.5	43.6	39.5	40.1	41.5	43.6	39.5	40.1	41.5	43.6																												
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7																												
	ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18	28	26	22	18	28	26	22	18																												
	kW	2.97	2.97	2.96	3.0	3.30	3.30	3.29	3.3	3.68	3.67	3.67	3.7	4.08	4.08	4.07	4.1	4.53	4.53	4.52	4.5	5.06	5.06	5.05	5.1	5.06	5.06	5.05	5.1	5.06	5.06	5.05	5.1																												
80	Amps	10.6	10.6	10.6	10.7	12.1	12.1	12.1	12.2	13.8	13.8	13.8	13.9	15.7	15.7	15.6	15.8	17.7	17.7	17.7	17.8	20.2	20.2	20.1	20.2	20.2	20.2	20.1	20.2	20.2	20.1	20.1	20.2																												
	Hi PR	264	265	267	271.7	305	306	308	312.3	348	349	350	354.9	393	394	396	400.8	443	444	446	450.3	496	497	499	503.0	496	497	499	503.0	496	497	499	503.0																												
	Lo PR	126	127	130	135.1	133	134	137	142.4	139	141	144	148.8	145	146	149	154.2	150	151	154	159.5	156	158	161	166.1	156	158	161	166.1	156	158	161	166.1																												
	MBh	47.4	48.0	49.4	51.5	47.0	47.6	49.0	51.1	45.8	46.4	47.8	49.9	43.7	44.4	45.8	47.8	41.2	41.9	43.2	45.3	38.9	39.6	40.9	43.0	38.9	39.6	40.9	43.0	38.9	39.6	40.9	43.0																												
	S/T	1.00	0.92	0.79	0.6	1.00	0.93	0.79	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.8	0.8	1.00	1.00	0.8	0.8	1.00	1.00	0.8	0.8																												
	ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	27	24	33	31	27	24	33	31	27	24																												
1600	kW	2.95	2.95	2.95	2.97	3.29	3.29	3.28	3.31	3.66	3.66	3.65	3.68	4.07	4.06	4.06	4.08	4.52	4.51	4.51	4.53	5.05	5.04	5.04	5.06	5.05	5.04	5.04	5.06	5.05	5.04	5.04	5.06																												
	Amps	10.5	10.5	10.5	10.6	12.1	12.0	12.0	12.1	13.8	13.8	13.7	13.8	15.6	15.6	15.6	15.7	17.7	17.7	17.6	17.8	20.1	20.1	20.1	20.2	20.1	20.1	20.1	20.2	20.1	20.1	20.1	20.2																												
	Hi PR	262	263	265	269.3	303	304	306	310.0	345	346	348	352.6	391	392	394	398.5	441	442	443	447.9	493	494	496	500.7	493	494	496	500.7	493	494	496	500.7																												
	Lo PR	123	125	128	132.9	131	132	135	140.1	137	138	141	146.5	142	144	147	151.9	148	149	152	157.2	154	156	159	163.8	154	156	159	163.8	154	156	159	163.8																												
	MBh	48.0	48.6	50.0	52.1	47.5	48.2	49.6	51.7	46.4	47.0	48.4	50.5	44.3	44.9	46.3	48.4	41.8	42.4	43.8	45.9	39.5	40.1	41.5	43.6	39.5	40.1	41.5	43.6	39.5	40.1	41.5	43.6																												
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.85	0.7																												
1800	ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18	28	26	22	18	28	26	22	18																												
	kW	2.97	2.97	2.96	3.0	3.30	3.30	3.29	3.3	3.68	3.67	3.67	3.7	4.08	4.08	4.07	4.1	4.53	4.53	4.52	4.5	5.06	5.06	5.05	5.1	5.06	5.06	5.05	5.1	5.06	5.06	5.05	5.1																												
	Amps	10.6	10.6	10.6	10.7	12.1	12.1	12.1	12.2	13.8	13.8	13.8	13.9	15.7	15.7	15.6	15.8	17.7	17.7	17.7	17.8	20.2	20.2	20.1	20.2	20.2	20.2	20.1	20.2	20.2	20.1	20.1	20.2																												
	Hi PR	264	265	267	271.7	305	306	308	312.3	348	349	350	354.9	393	394	396	400.8	443	444	446	450.3	496	497	499	503.0	496	497	499	503.0	496	497	499	503.0																												
	Lo PR	126	127	130	135.1	133	134	137	142.4	139	141	144	148.8	145	146	149	154.2	150	151	154	159.5	156	158	161	166.1	156	158	161	166.1	156	158	161	166.1																												
	MBh	47.9	48.5	49.9	52.0	47.4	48.1	49.5	51.5	46.2	46.9	48.3	50.3	44.2	44.8	46.2	48.3	41.7	42.3	43.7	45.8	39.4	40.0	41.4	43.5	39.4	40.0	41.4	43.5	39.4	40.0	41.4	43.5																												

		OUTDOOR AMBIENT TEMPERATURE																												
		65					75					85					95					105					115			
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71
70	MBh	56.7	57.5	59.2	-	-	56.2	57.0	58.7	-	-	54.7	55.5	57.2	-	-	52.2	53.0	54.7	-	-	49.1	49.9	51.6	-	-	46.3	47.1	48.8	-
	S/T	0.61	0.54	0.42	-	-	0.62	0.55	0.42	-	-	0.64	0.57	0.45	-	-	0.66	0.59	0.47	-	-	1.00	0.61	0.49	-	-	1.00	0.66	0.53	-
	ΔT	21	19	15	-	-	21	19	15	-	-	21	19	16	-	-	21	19	15	-	-	21	19	15	-	-	22	20	16	-
	kW	3.54	3.53	3.53	-	-	3.96	3.96	3.95	-	-	4.44	4.44	4.43	-	-	4.96	4.96	4.95	-	-	5.54	5.54	5.53	-	-	6.22	6.21	6.21	-
	Amps	13.1	13.1	13.1	-	-	15.1	15.1	15.0	-	-	17.3	17.2	17.2	-	-	19.6	19.6	19.6	-	-	22.3	22.3	22.2	-	-	25.4	25.4	25.3	-
	Hi PR	256	257	259	-	-	296	297	299	-	-	338	339	341	-	-	383	384	386	-	-	432	433	434	-	-	483	485	486	-
	Lo PR	122	124	127	-	-	130	131	134	-	-	136	137	141	-	-	141	143	146	-	-	147	148	151	-	-	153	155	158	-
70	MBh	57.8	58.5	60.2	-	-	57.3	58.0	59.7	-	-	55.8	56.6	58.3	-	-	53.3	54.1	55.7	-	-	50.2	51.0	52.7	-	-	47.4	48.2	49.9	-
	S/T	0.65	0.58	0.45	-	-	0.65	0.58	0.46	-	-	0.68	0.61	0.48	-	-	1.00	0.63	0.50	-	-	1.00	0.65	0.52	-	-	1.00	0.69	0.57	-
	ΔT	20	18	14	-	-	20	18	14	-	-	20	18	14	-	-	20	18	14	-	-	20	18	14	-	-	21	19	15	-
	kW	3.56	3.55	3.55	-	-	3.99	3.98	3.98	-	-	4.46	4.46	4.45	-	-	4.98	4.98	4.97	-	-	5.56	5.56	5.55	-	-	6.24	6.24	6.23	-
	Amps	13.2	13.2	13.2	-	-	15.2	15.2	15.1	-	-	17.4	17.3	17.3	-	-	19.7	19.7	19.7	-	-	22.4	22.4	22.3	-	-	25.5	25.5	25.4	-
	Hi PR	258	259	261	-	-	298	299	301	-	-	340	341	343	-	-	385	386	388	-	-	434	435	437	-	-	486	487	489	-
	Lo PR	125	126	129	-	-	132	133	136	-	-	138	140	143	-	-	144	145	148	-	-	149	151	154	-	-	156	157	160	-
2000	MBh	59.2	60.0	61.7	-	-	58.7	59.5	61.2	-	-	57.3	58.1	59.7	-	-	54.8	55.5	57.2	-	-	51.7	52.5	54.1	-	-	48.9	49.7	51.3	-
	S/T	0.65	0.58	0.46	-	-	0.66	0.59	0.46	-	-	0.68	0.61	0.49	-	-	1.00	0.63	0.51	-	-	1.00	0.65	0.53	-	-	1.00	0.70	0.57	-
	ΔT	19	17	13	-	-	19	17	13	-	-	19	17	13	-	-	19	17	13	-	-	18	16	12	-	-	20	18	14	-
	kW	3.58	3.58	3.57	-	-	4.01	4.00	4.00	-	-	4.49	4.48	4.47	-	-	5.00	5.00	4.99	-	-	5.58	5.58	5.57	-	-	6.26	6.26	6.25	-
	Amps	13.3	13.3	13.3	-	-	15.3	15.2	15.2	-	-	17.5	17.4	17.4	-	-	19.8	19.8	19.8	-	-	22.5	22.5	22.4	-	-	25.6	25.6	25.5	-
	Hi PR	261	262	264	-	-	301	302	304	-	-	343	344	346	-	-	388	389	391	-	-	437	438	440	-	-	489	490	492	-
	Lo PR	128	129	132	-	-	135	136	140	-	-	141	143	146	-	-	147	148	151	-	-	152	154	157	-	-	159	160	163	-

1525	MBh	56.7	57.5	59.2	61.7	56.2	57.0	58.7	61.2	54.8	55.6	57.2	59.8	52.2	53.0	54.7	57.3	49.2	50.0	51.6	54.2	46.4	47.2	48.8	51.4
	S/T	0.73	0.66	0.54	0.4	0.74	0.67	0.54	0.4	1.00	0.69	0.57	0.4	1.00	0.71	0.58	0.5	1.00	0.73	0.60	0.5	1.00	1.00	0.65	0.5
	ΔT	26	24	20	16	26	24	20	16	26	24	20	16	26	24	20	16	25	23	19	15	27	25	21	17
	kW	3.53	3.53	3.52	3.6	3.96	3.96	3.95	4.0	4.44	4.44	4.43	4.5	4.96	4.95	4.95	5.0	5.54	5.53	5.53	5.6	6.21	6.21	6.20	6.2
	Amps	13.1	13.1	13.0	13.2	15.1	15.0	15.0	15.2	17.2	17.2	17.2	17.3	19.6	19.6	19.6	19.7	22.3	22.2	22.2	22.4	25.4	25.3	25.3	25.5
	Hi PR	256	257	259	263.3	296	297	299	303.3	338	339	341	345.2	383	384	386	390.4	432	433	435	439.1	484	485	487	491.0
1750	Lo PR	122	124	127	132.0	130	131	134	139.3	136	138	141	145.7	141	143	146	151.1	147	148	151	156.5	153	155	158	163.1
	MBh	57.8	58.6	60.2	62.8	57.3	58.1	59.7	62.3	55.8	56.6	58.3	60.8	53.3	54.1	55.8	58.3	50.2	51.0	52.7	55.3	47.4	48.2	49.9	52.4
	S/T	0.77	0.70	0.57	0.4	0.77	0.70	0.58	0.4	1.00	0.73	0.60	0.5	1.00	0.74	0.62	0.5	1.00	0.76	0.64	0.5	1.00	1.00	0.69	0.6
	ΔT	25	22	19	15	25	22	19	15	25	23	19	15	24	22	19	15	24	22	18	14	26	23	20	16
	kW	3.56	3.55	3.54	3.58	3.98	3.98	3.97	4.01	4.46	4.46	4.45	4.48	4.98	4.98	4.97	5.00	5.56	5.55	5.55	5.58	6.24	6.23	6.23	6.26
	Amps	13.2	13.2	13.1	13.3	15.2	15.1	15.1	15.3	17.3	17.3	17.3	17.4	19.7	19.7	19.7	19.8	22.4	22.3	22.3	22.5	25.5	25.4	25.4	25.6
2000	Hi PR	258	260	261	265.8	298	300	301	305.8	340	341	343	347.7	386	387	388	392.8	434	435	437	441.5	486	487	489	493.5
	Lo PR	125	126	129	134.3	132	133	137	141.6	138	140	143	148.1	144	145	148	153.5	149	151	154	158.8	156	157	160	165.5
	MBh	59.3	60.1	61.7	64.3	58.8	59.6	61.2	63.8	57.3	58.1	59.8	62.3	54.8	55.6	57.2	59.8	51.7	52.5	54.2	56.7	48.9	49.7	51.4	53.9
	S/T	0.77	0.70	0.58	0.4	1.00	0.71	0.58	0.5	1.00	0.73	0.61	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	1.00	0.69	0.6
	ΔT	23	21	17	13	23	21	17	13	24	22	18	14	23	21	17	13	23	21	17	13	24	22	18	14
	kW	3.58	3.57	3.57	3.6	4.00	4.00	3.99	4.0	4.48	4.48	4.47	4.5	5.00	5.00	4.99	5.0	5.58	5.58	5.57	5.6	6.26	6.25	6.25	6.3
2000	Amps	13.3	13.3	13.2	13.4	15.2	15.2	15.2	15.4	17.4	17.4	17.4	17.5	19.8	19.8	19.8	19.9	22.5	22.4	22.4	22.6	25.6	25.5	25.5	25.7
	Hi PR	261	262	264	268.6	301	302	304	308.6	343	344	346	350.6	388	390	391	395.7	437	438	440	444.4	489	490	492	496.3
	Lo PR	128	129	132	137.4	135	137	140	144.7	141	143	146	151.1	147	148	151	156.6	152	154	157	161.9	159	160	163	168.6

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																					
		65						75						85						95						105						115							
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191	195			
		ENTERING INDOOR WET BULB TEMPERATURE																																					
1525	MBh	57.0	57.8	59.5	62.0	56.5	57.3	59.0	61.5	55.1	55.8	57.5	60.1	52.5	53.3	55.0	57.6	49.5	50.3	51.9	54.5	46.7	47.5	49.1	51.7														
	S/T	1.00	0.78	0.65	0.5	1.00	0.78	0.66	0.5	1.00	0.81	0.68	0.6	1.00	0.83	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.77	0.6														
	ΔT	30	28	24	20	30	28	24	20	31	29	25	21	30	28	24	20	30	28	24	20	31	29	25	21														
	kW	3.54	3.53	3.52	3.6	3.96	3.96	3.95	4.0	4.44	4.44	4.43	4.5	4.96	4.96	4.95	5.0	5.54	5.54	5.53	5.6	6.22	6.21	6.21	6.2														
	Amps	13.1	13.1	13.1	13.2	15.1	15.0	15.0	15.2	17.3	17.2	17.2	17.4	19.6	19.6	19.6	19.7	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5														
	Hi PR	256	258	259	263.8	296	298	299	303.8	338	339	341	345.7	384	385	386	390.8	432	433	435	439.5	484	485	487	491.5														
	Lo PR	123	124	127	132.5	130	132	135	139.8	137	138	141	146.2	142	143	147	151.7	147	149	152	157.0	154	155	159	163.7														
1750	MBh	58.1	58.9	60.5	63.1	57.6	58.4	60.0	62.6	56.1	56.9	58.6	61.1	53.6	54.4	56.1	58.6	50.5	51.3	53.0	55.5	47.7	48.5	50.2	52.7														
	S/T	1.00	0.81	0.69	0.6	1.00	0.82	0.69	0.6	1.00	0.84	0.72	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.80	0.7														
	ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	30	28	24	20														
	kW	3.56	3.55	3.55	3.58	3.99	3.98	3.98	4.01	4.46	4.46	4.45	4.49	4.98	4.98	4.97	5.00	5.56	5.56	5.55	5.58	6.24	6.24	6.23	6.26														
	Amps	13.2	13.2	13.2	13.3	15.2	15.1	15.1	15.3	17.4	17.3	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.4	22.3	22.5	25.5	25.5	25.4	25.6														
	Hi PR	259	260	262	266.2	299	300	302	306.2	341	342	344	348.2	386	387	389	393.3	435	436	438	442.0	487	488	490	493.9														
	Lo PR	125	127	130	134.8	132	134	137	142.2	139	140	143	148.6	144	146	149	154.0	150	151	154	159.3	156	158	161	166.0														
2000	MBh	59.6	60.3	62.0	64.6	59.1	59.8	61.5	64.1	57.6	58.4	60.1	62.6	55.1	55.9	57.5	60.1	52.0	52.8	54.5	57.0	49.2	50.0	51.7	54.2														
	S/T	1.00	0.82	0.69	0.6	1.00	0.82	0.70	0.6	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7														
	ΔT	28	26	22	18	28	26	22	18	28	26	22	18	28	26	22	18	28	26	22	18	29	27	23	19														
	kW	3.58	3.57	3.57	3.6	4.01	4.00	4.00	4.0	4.49	4.48	4.47	4.5	5.00	5.00	4.99	5.0	5.58	5.58	5.57	5.6	6.26	6.26	6.25	6.3														
	Amps	13.3	13.3	13.2	13.4	15.3	15.2	15.2	15.4	17.4	17.4	17.4	17.5	19.8	19.8	19.8	19.9	22.5	22.4	22.4	22.6	25.6	25.6	25.5	25.7														
	Hi PR	262	263	265	269.1	302	303	305	309.1	344	345	347	351.0	389	390	392	396.2	438	439	440	444.9	489	491	492	496.8														
	Lo PR	128	130	133	137.9	136	137	140	145.2	142	143	147	151.7	147	149	152	157.1	153	154	157	162.4	159	161	164	169.1														

85	MBh	58.0	58.7	60.4	63.0	66.0	69.0	72.0	75.0	78.0	81.0	84.0	87.0	90.0	93.0	96.0	99.0	102.0	105.0	108.0	111.0	114.0	117.0	120.0	123.0	126.0	129.0	132.0	135.0	138.0	141.0	144.0	147.0	150.0	153.0	156.0	159.0
	S/T	1.00	0.87	0.75	0.6	0.45	0.35	0.25	0.15	0.08	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
	ΔT	34	32	29	24	20	16	13	10	8	6	5	4	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	kW	3.54	3.54	3.53	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
	Amps	13.1	13.1	13.1	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2
	Hi PR	258	259	261	264.9	267.4	269.8	272.2	274.6	277.0	279.4	281.8	284.2	286.6	289.0	291.4	293.8	296.2	298.6	301.0	303.4	305.8	308.2	310.6	313.0	315.4	317.8	320.2	322.6	325.0	327.4	329.8	332.2	334.6	337.0	339.4	341.8

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

ASXN401810**/CA*TA1818*4A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 600 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	18,860	13,450	5,410	1,230
80	18,630	13,510	5,120	1,300
85	18,390	13,560	4,830	1,360
90	18,000	13,440	4,560	1,430
95	17,600	13,310	4,290	1,500
100	17,120	13,120	4,000	1,580
105	16,630	12,930	3,700	1,660
110	16,190	12,980	3,210	1,760
115	15,740	13,020	2,720	1,850
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	16,980	13,010	3,970	1,500

ASXN402410**/CA*TA2422*4A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 800 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	24,460	16,680	7,780	1,590
80	24,160	16,750	7,410	1,680
85	23,860	16,820	7,040	1,760
90	23,350	16,670	6,680	1,860
95	22,830	16,510	6,320	1,950
100	22,200	16,280	5,930	2,060
105	21,570	16,040	5,530	2,160
110	20,990	16,090	4,900	2,290
115	20,410	16,140	4,270	2,410
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	22,020	16,130	5,890	1,950


ASXN403010**/CA*TA3026*4A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	31,070	21,380	9,690	2,000
80	30,690	21,470	9,230	2,120
85	30,310	21,550	8,760	2,230
90	29,660	21,350	8,310	2,350
95	29,000	21,140	7,860	2,470
100	28,210	20,840	7,370	2,610
105	27,410	20,540	6,870	2,740
110	26,680	20,610	6,070	2,900
115	25,950	20,680	5,270	3,060
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,980	20,660	7,320	2,470

ASXN403610**/CA*TA3626*4A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1150 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	36,670	25,550	11,120	2,390
80	36,220	25,670	10,550	2,530
85	35,760	25,790	9,970	2,660
90	34,980	25,560	9,430	2,800
95	34,200	25,320	8,880	2,940
100	33,250	24,960	8,290	3,100
105	32,290	24,600	7,690	3,260
110	31,420	24,710	6,720	3,450
115	30,550	24,810	5,740	3,640
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	32,980	24,740	8,240	2,950

ASXN404210**/CA*TA4230*4A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	42,730	31,180	11,550	2,760
80	42,210	31,310	10,900	2,920
85	41,680	31,440	10,240	3,070
90	40,780	31,150	9,640	3,240
95	39,880	30,850	9,030	3,410
100	38,780	30,410	8,370	3,600
105	37,670	29,970	7,700	3,780
110	36,670	30,080	6,590	4,000
115	35,660	30,180	5,480	4,220
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	38,470	30,150	8,320	3,410

ASXN404810**/CA*T4961*4A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1600 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	48,680	35,050	13,630	3,280
80	48,090	35,210	12,880	3,470
85	47,490	35,360	12,130	3,650
90	46,460	35,020	11,440	3,860
95	45,430	34,680	10,750	4,060
100	44,180	34,190	9,990	4,290
105	42,920	33,690	9,230	4,510
110	41,770	33,810	7,970	4,780
115	40,620	33,920	6,700	5,040
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	43,830	33,900	9,930	4,060

ASXN406010**/CA*T4961*4A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1750 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	60,030	41,650	18,380	3,980
80	59,300	41,820	17,480	4,220
85	58,570	41,990	16,580	4,450
90	57,320	41,600	15,720	4,710
95	56,060	41,200	14,860	4,970
100	54,530	40,610	13,920	5,260
105	52,990	40,020	12,970	5,550
110	51,590	40,150	11,440	5,890
115	50,180	40,280	9,900	6,230
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	54,100	40,260	13,840	4,980

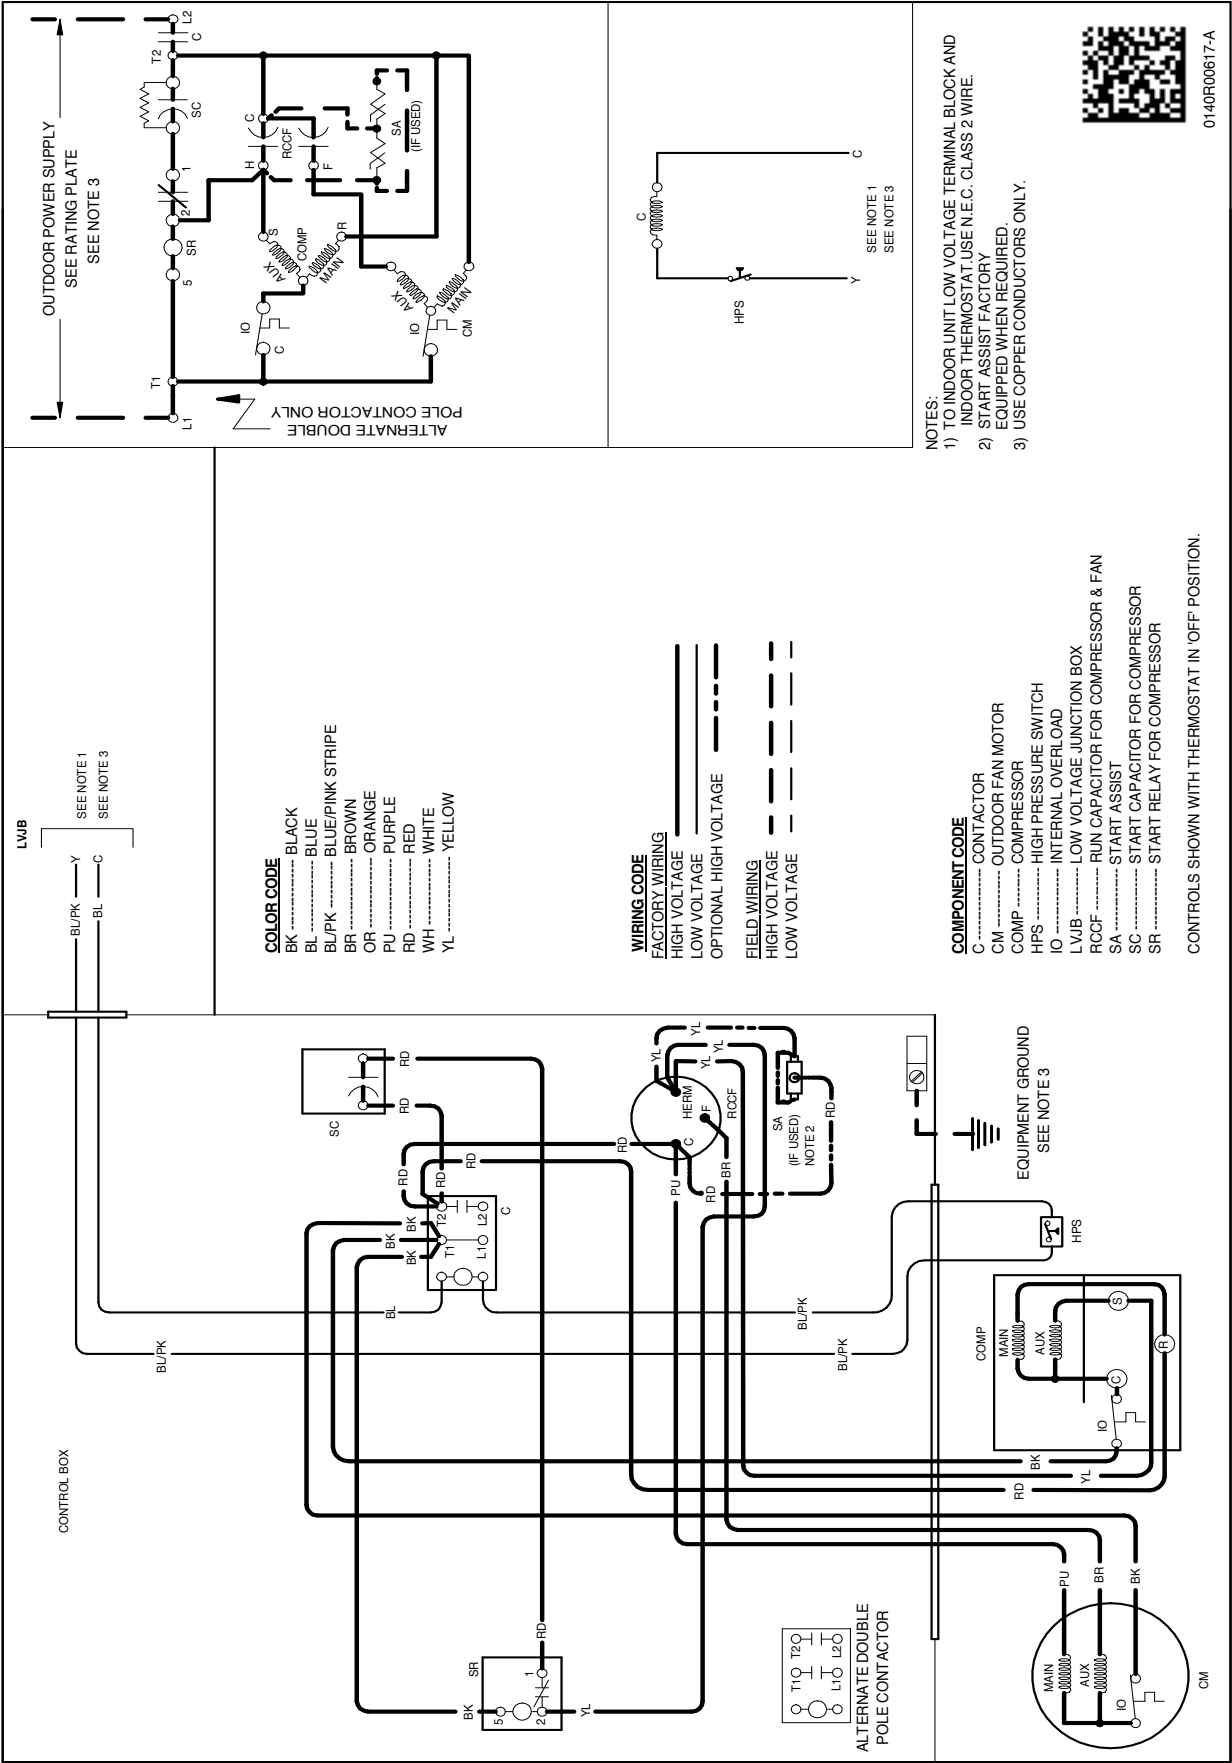


Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

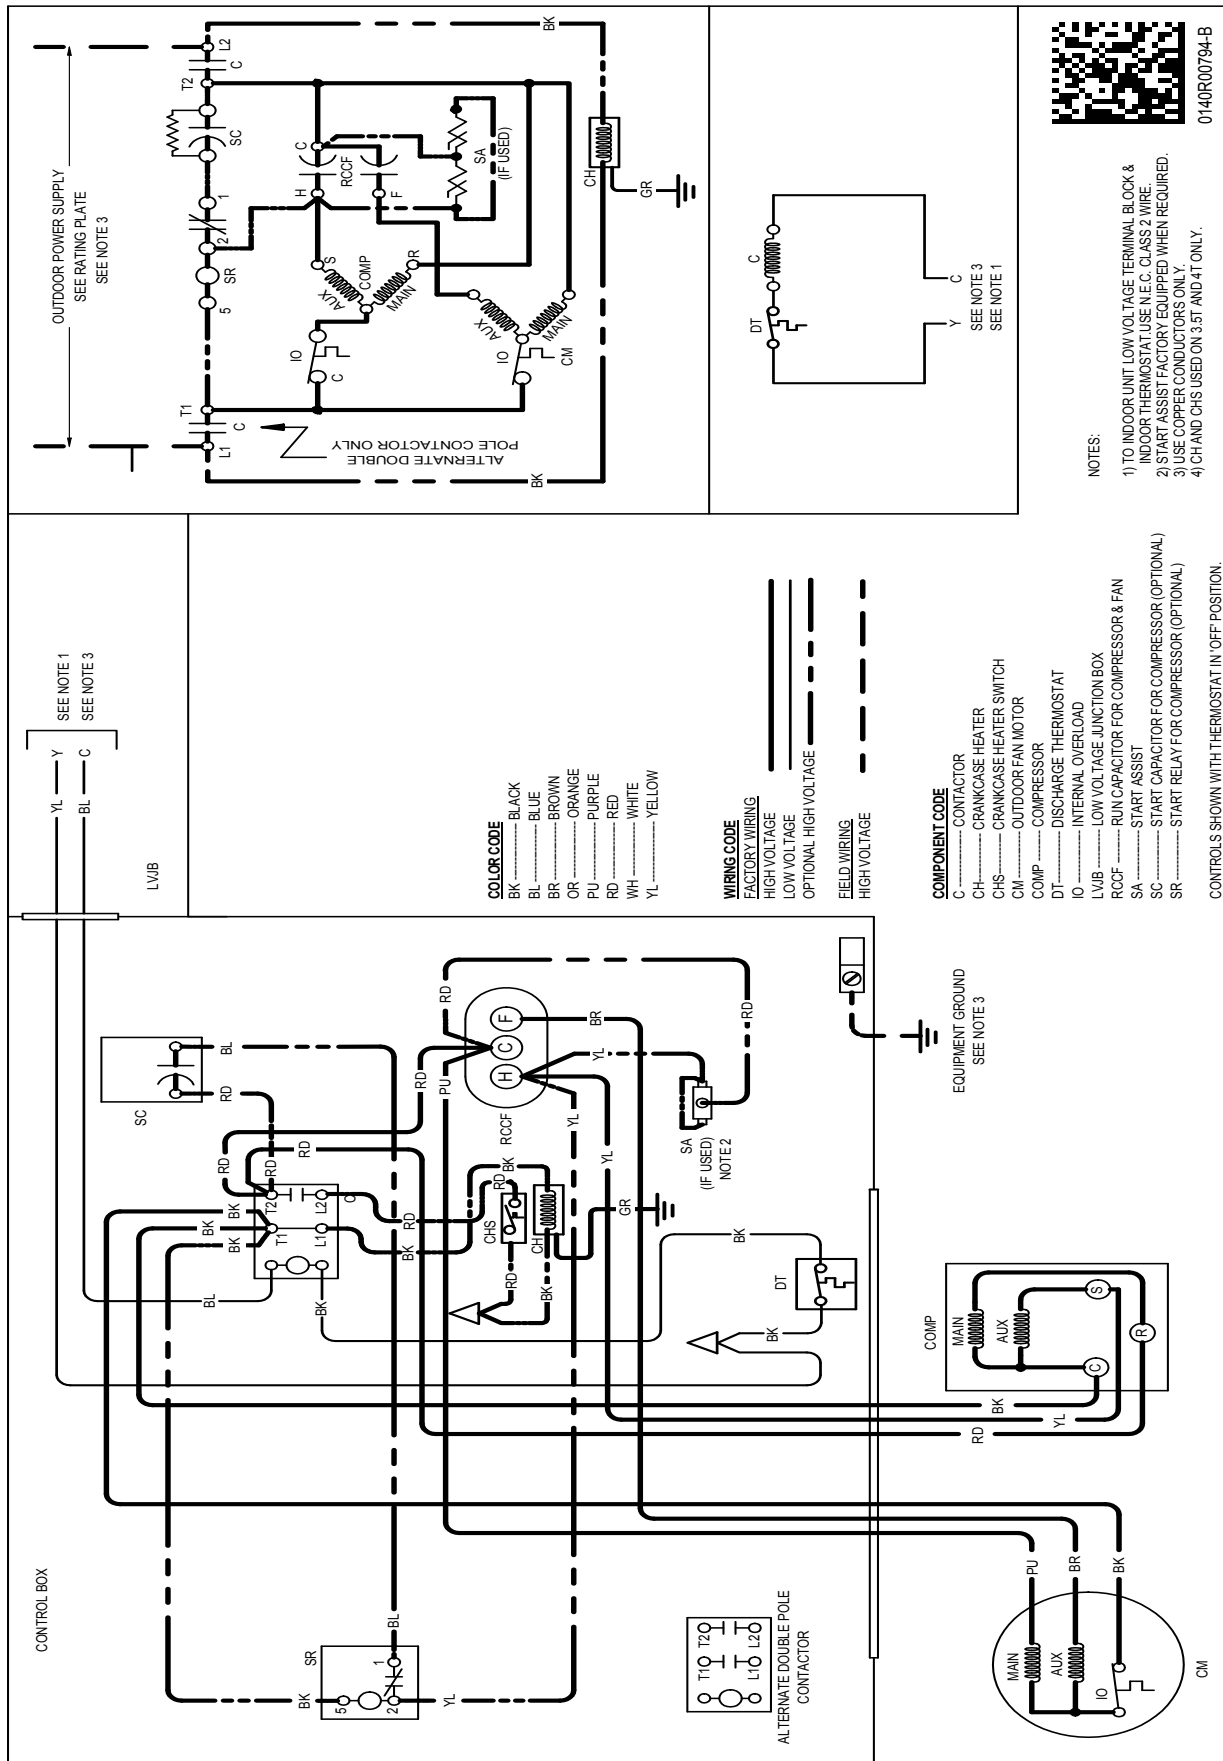


Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

DIMENSIONS

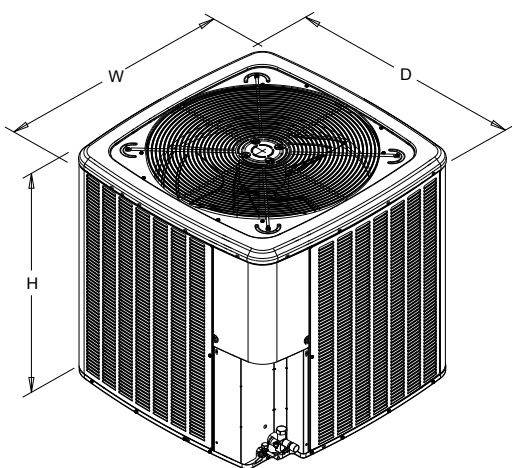

MODEL	DIMENSIONS		
	W"	D"	H"
ASXN401810A*	26	26	27
ASXN402410A*	26	26	32½
ASXN403010A*	29	29	39½
ASXN403610A*	35½	35½	35½
ASXN404210A*	35½	35½	39½
ASXN404810A*	35½	35½	39½
ASXN406010A*	35½	35½	36½

ACCESSORIES

Model	Description	ASXN4 01810A*	ASXN4 02410A*	ASXN4 03010A*	ASXN4 03610A*	ASXN4 04210A*	ASXN4 04810A*	ASXN4 06010A*
ABK-20	Anchor Bracket Kit ^	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
Factory Installed Hard-start Kit		X	X	X				
CSR-U-1	Hard-start Kit				X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
LSK02A ²	Liquid Line Solenoid Kit	X	X	X	X	X	X	X
LAKT01	Low-Ambient Kit	X	X	X	X	X	X	
0130R00000S	Low-Pressure Switch Kit	X	X	X	X	X	X	X
TXV-FX-KX-2T ²	TXV Kit	X	X					
TXV-FX-KX-3T ²	TXV Kit			X	X			
TXV-FX-KX-5T ²	TXV Kit					X	X	X

⁰ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Condensing units and heat pumps with reciprocating or rotary compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.

All AHRI system ratings are accessible in the System Configurator tool via PartnerLink.

[illegible]

[illegible]

Amana® is a registered trademark of Maytag Corporation or its related companies and is used under license. All rights reserved.

Our continuing commitment to quality products may mean a change in specifications without notice.

©2023 **DAIKIN COMFORT TECHNOLOGIES MANUFACTURING, L.P.** • Houston, Texas • Printed in the USA.